

# SELF LOCK

ENDO SELF LOCK "SLM SERIES"

# SLM

Fall arrest devices



CERT No. Q10458





# ENDO

# ENDO SELF LOCK "SLM SERIES"

**ENDO "SELF LOCK" improves the working safety at a height.**

- Light, compact and stainless steel body.
- A shock absorber contained in SELF LOCK reduces the shock felt by the worker, if the worker loses his/her footing and falls from a height.

## ■ Dimensions SLM-12/15

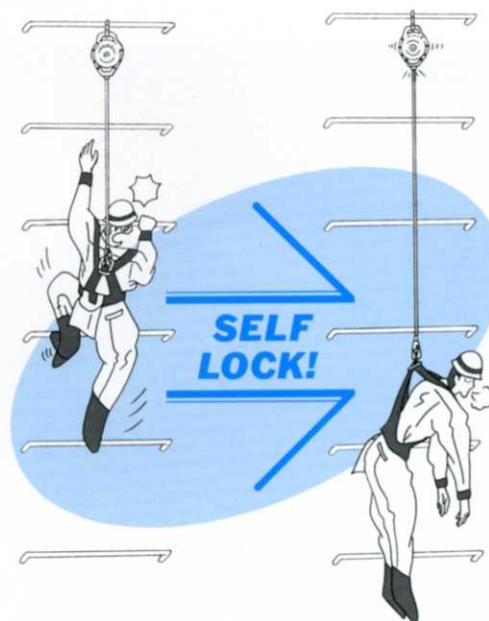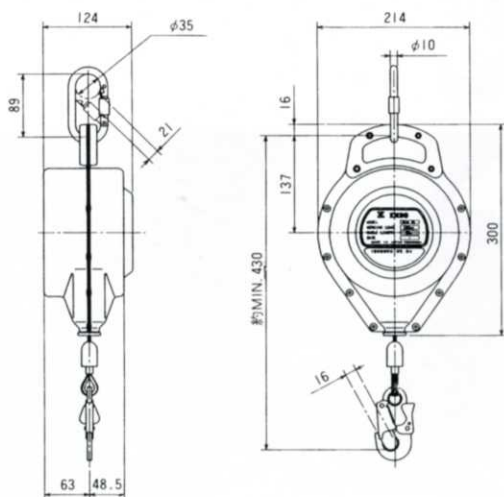

## ■ Specifications

Model	SLM-12	SLM-15
Working load	120kg	120kg
Max.tension	39N(4kgf)	39N(4kgf)
Cable type	AC3φ 4	AC3φ 4
Cable length	12m	15m
Drop	about 70cm	about 70cm
Mass	7.3kg	7.5kg

〈Note〉 The lengths of Drop is on our test data.

〈Included〉 Karabinar

〈Accessories〉 Sling. rope, Pull rope (12m.17m)

### IMPORTANT

- 1.SELF LOCK, whether labored or not, should pass the maker's complete inspection within 3 years after purchase and every 3 years thereafter.
- 2.Never reuse a labored SELF LOCK. Only use it after passing a maker's inspection.
- 3.Always read the instruction manual carefully before usage and installation of SELF LOCK. Never use it without correct understanding.
- 4.Use SELF LOCK between temperatures of -10°C to +50°C.

- Various circular sawing machine ● Various circular saw grinding machine ● Flange facer ● Spring balancer
- Air hoist ● Cable reel ● Hose reel ● Wire reel ● Self lock

MANUFACTURER  
**ENDO KOGYO CO., LTD.**

Head Office & Plant : 3-14-7, Akibacho, Tsubame, Niigata, Japan  
Tel. 0256-62-5131 FAX. 0256-62-5772  
Tokyo Office : Tanaka Bldg., 2F, 12, Kanda Higashimatushita-cho,  
Chiyoda-ku, Tokyo, Japan  
Tel. 03-5295-3711 FAX. 03-5295-3717  
Osaka Office : Daito Bldg., 3F, 3-14, Saiwaicho 2-Chome,  
Naniwa-ku, Osaka, Japan  
Tel. 06-568-1571 FAX. 06-568-1573