


ENDOSCOPE CODE ISV-E55*

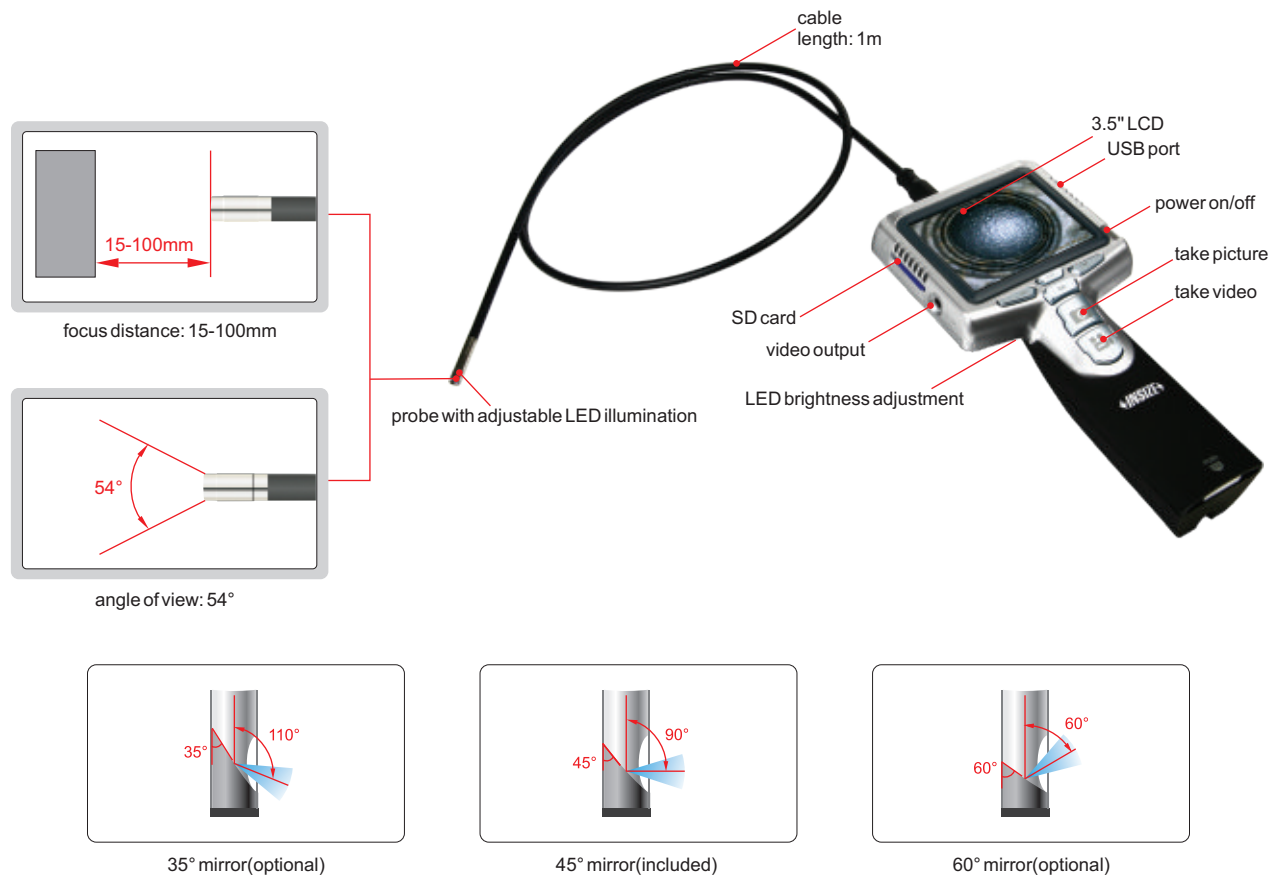

SPECIFICATION

Probe diameter	5.5mm
Dust/waterproof probe	IP57
Pixel	0.3M
Resolution	640x480
Frame rate	30fps
Video format	PAL or NTSC
Memory	2G SD card (store 6000 pictures or 15 minutes video)
Power supply	rechargeable battery (for 3 hours working)
Weight	450g

STANDARD DELIVERY



Main unit	1pc	Spare battery	1pc
Cable with probe	1pc	AC/DC adapter	1pc
SD card 2G	1pc	Video output cable	1pc
45° mirror	1pc	USB cable	1pc

OPTIONAL ACCESSORY


35° mirror	ISV-E55-M35
60° mirror	ISV-E55-M60
Cable	Page Q5

* Add suffix on code No. to devote AC voltage and plug (refer to page V1)


ENDOSCOPE CODE ISV-E55B*

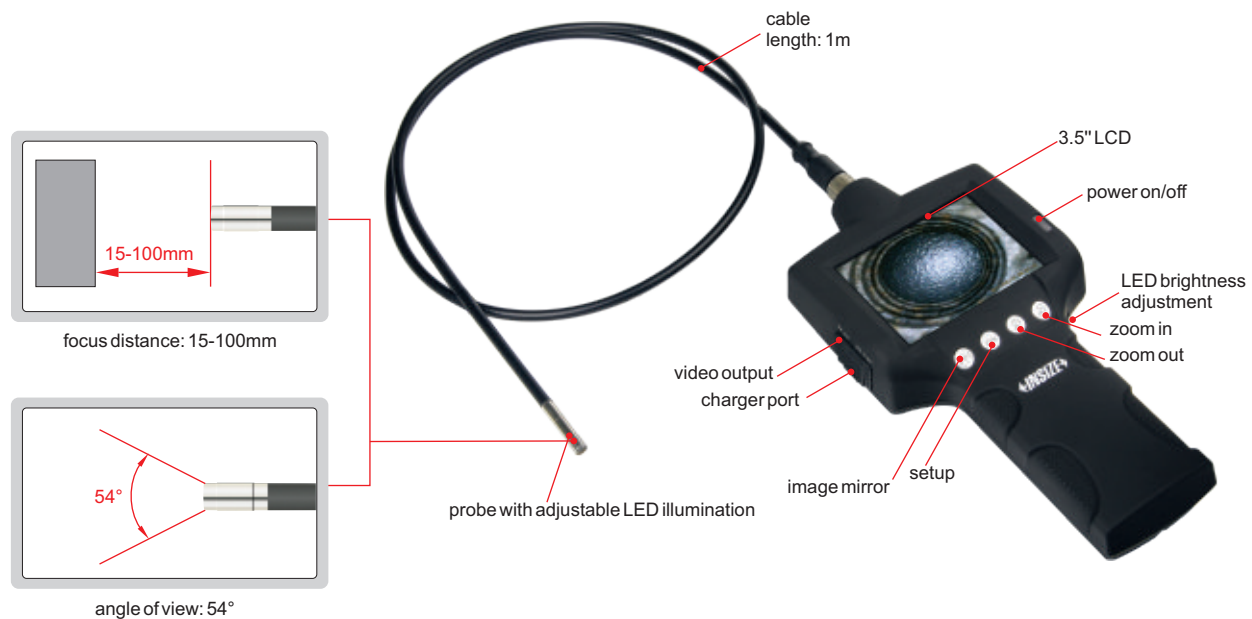

35° mirror(optional)



45° mirror(optional)



60° mirror(optional)

SPECIFICATION

Probe diameter	5.5mm
Dust/waterproof probe	IP57
Pixel	0.3M
Resolution	640x480
Frame rate	30fps
Video format	PAL or NTSC
Power supply	rechargeable battery (for 3 hours working)
Weight	450g

STANDARD DELIVERY


Main unit	1pc
Cable with probe	1pc
AC/DC adapter	1pc
Video output cable	1pc

OPTIONAL ACCESSORY

35° mirror	ISV-E55-M35
45° mirror	ISV-E55-M45
60° mirror	ISV-E55-M60
Cable	Page Q5

* Add suffix on code No. to devote AC voltage and plug (refer to page V1)

ENDOSCOPE CODE ISV-E55C

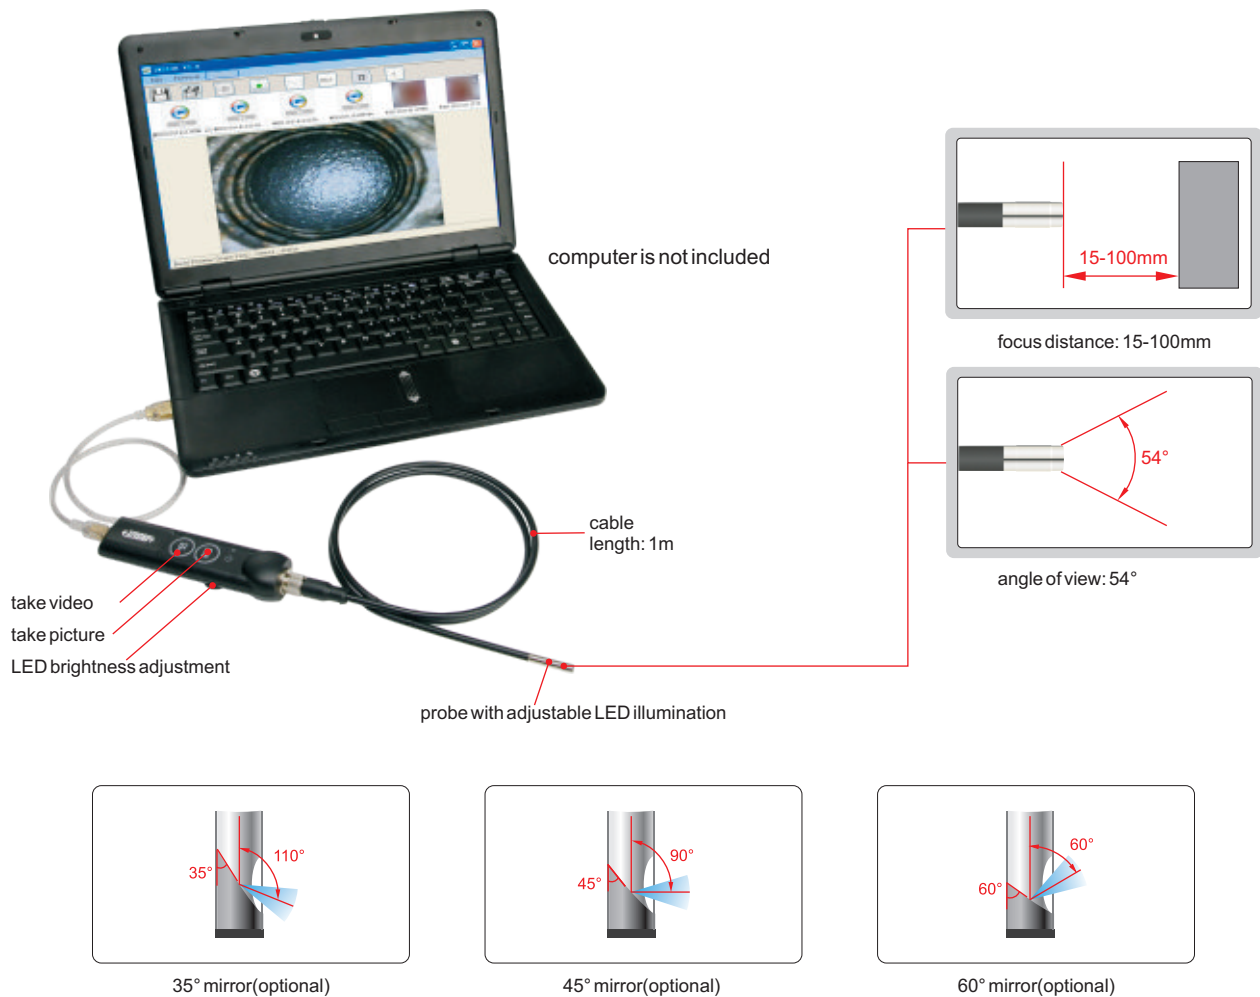

SPECIFICATION

Probe diameter	5.5mm
Dust/waterproof probe	IP57
Pixel	0.3M
Resolution	640x480
Frame rate	30fps
Power supply	USB
Weight	150g

STANDARD DELIVERY

Main unit	1pc
Cable with probe	1pc
Software CD	1pc
USB cable	1pc

OPTIONAL ACCESSORY

35° mirror	ISV-E55-M35
45° mirror	ISV-E55-M45
60° mirror	ISV-E55-M60
Cable	Page Q5

ENDOSCOPE MAIN UNIT CODE ISV-MUE55*



SPECIFICATION

Video format	PAL or NTSC
Memory	2G SD card (store 6000 pictures or 15 minutes video)
Power supply	rechargeable battery (for 3 hours working)
Weight	430g

STANDARD DELIVERY

Main unit	1pc
SD card 2G	1pc
Spare battery	1pc
AC/DC adapter	1pc
Video output cable	1pc
USB cable	1pc

OPTIONAL ACCESSORY


Cable	Page Q5
--------------	---------

* Add suffix on code No. to devote AC voltage and plug (refer to page V1)


CABLE FOR ENDOSCOPE




Type A
Cable





Type B
Cable



Type C
Semi-rigid cable
(Cable can be set at any shape)



Type D
Semi-rigid cable
(Cable can be set at any shape)



- IP57 dust/waterproof
- With adjustable LED illumination
- Applicable endoscopes: ISV-E55, ISV-E55B, ISV-MUE55, ISV-E55C



SPECIFICATION

Code	Type	Diameter (Ød)	Cable length	Focus distance(L)	Probe
ISV-E55-C4301	A	4.3mm	1m	15-30mm	pixel 0.1M resolution 320x240 frame rate 30fps
ISV-E55-C5501	B	5.5mm	1m	15-100mm	pixel 0.3M resolution 640x480 frame rate 30fps
ISV-E55-C5503			3m		
ISV-E55-C5505			5m		
ISV-E55-C5510			10m		
ISV-E55-R5501	C	5.5mm	1m		
ISV-E55-R5503			3m		
ISV-E55-R1201	D	12mm	1m		

OPTIONAL ACCESSORY

35° mirror for type B and C	ISV-E55-M35
45° mirror for type B and C	ISV-E55-M45
60° mirror for type B and C	ISV-E55-M60

ENDOSCOPE CODE ISV-1000D*

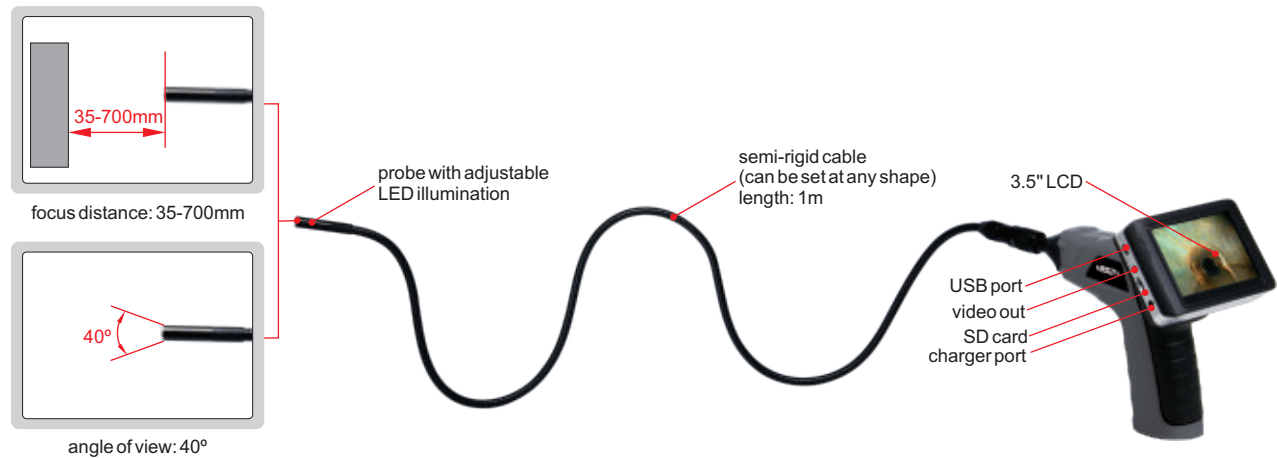

the monitor can be separated from main body



mirror



hook



magnetic pick-up

- Can take videos and pictures

SPECIFICATION

Probe diameter	9mm
Dust/waterproof probe	IP57
Pixel	0.3M
Resolution	640x480
Frame rate	30fps
Transmission distance	the monitor can be separated from main body, the maximum distance is 10m
Video format	PAL
Memory	2G SD card (store 5000 pictures or 15 minutes video)
Power supply of main body	4xAA batteries
Power supply of monitor	rechargeable battery (for 4 hours working)
Weight	1.1kg

STANDARD DELIVERY

Main body	1pc
Monitor	1pc
Cable with probe	1pc
Mirror	1pc
Hook	1pc
Magnetic pick-up	1pc

SD card 2G	1pc
AA battery	4pcs
Video output cable	1pc
AC/DC adapter	1pc
USB cable	1pc

OPTIONAL ACCESSORY

1m semi-rigid extension cable	ISV-1000D-CABLE
-------------------------------	-----------------

* Add suffix on code No. to devote AC voltage and plug (refer to page V1)