

INDEX

Gage Blocks	E-2-4
Metric Rectangular Gage Block Set	E-5,6
Inch Rectangular Gage Block Set	E-7
Micrometer Inspection Gage Block Sets	E-8
Bore Gage Calibration Kit	E-8
Individual Metric Rectangular Gage Block	E-9,10
Individual Inch Rectangular Gage Block	E-11
Rectangular Gage Block with CTE	E-12
Rectangular Gage Block Accessories	E-13-15
Metric Square Gage Block Set	E-16
Inch Square Gage Block Set	E-17
Individual Metric Square Gage Block	E-18
Individual Inch Square Gage Block	E-19
Square Gage Block Accessories	E-20,21
Ceraston	E-22
Maintenance Kit for Gage Block	E-22
Step Master	E-23
Made-to-order Block & Reference	E-23
Gage Block Comparator GBCD-250	E-24
Gage Block Comparator GBCD-100A	E-24
Height Masters	
Height Master	E-25
Digital Height Master	E-26
Riser Blocks	E-27
Auxiliary Block Kit	E-27
Universal Height Master	E-28
High Accuracy Check Master HMC-H	E-29
CERA Straight Master SM-C	E-30
Square Master	E-31
Reference Gages	
Standard Scales	E-32
Working Standard Scales	E-32
High Precision Square	E-33
Spring Dividers and Calipers	E-33
Combination Square Set	E-34
Steel Rules	E-35,36
Semi-Flexible Rules	E-36
Thickness Gages	E-37
Precision Levels	E-37
Digital Universal Protractor	E-38
Universal Bevel Protractor	E-39
Bevel Protractor	E-39
Radius Gages	E-40
Pitch Gages	E-40
Radius Gages-Sets	E-41
Digital Protractor	E-42
Digital Hand Tachometers	E-43
Bench Center	E-44
Granite Surface Plate	
Granite Surface Plate Accessories	E-44
Black Granite Surface Plate	E-45
Steel Stands	E-46



Gage Blocks



Height Master



Reference Gages



Granite Surface Plates & Bench Comparator



CERA/Steel Combination Gage Block Sets



Step Master



ZERO CERA BLOCK



Ceramic Straight Master

Gage Block

SERIES 516

FEATURES

Precision gage blocks are the primary standards vital to dimensional quality control in the manufacture of parts. Mitutoyo offers

a complete selection of gage blocks available in a choice of rectangular or square, metric or inch and steel or CERA (ceramic) types.

Accuracy

Gage blocks offered by an all-round precision measuring machine manufacturer, Mitutoyo, guarantee such a high accuracy that users can use them without anxiety. Needless to say, Mitutoyo has established a traceability system for our measurement products, up to the Metrology Management Center of the National Institute of Advanced Industrial Science and Technology (AIST) and we have been certified by the Japanese government as an accredited laboratory.

Wringing

The lapping technique is one of Mitutoyo's specialties. Our advanced lapping technique, developed for more than a half century, enables us to achieve the best flatness and surface roughness needed for gage blocks and realize a great wringing force.

Abrasion Resistance and Dimensional Stability

High-carbon high-chrome steel is employed to sufficiently satisfy a variety of material characteristics required for gage blocks. A high degree of hardness, obtained by our heat treatment technology and that reassures users, as well as methodically repeated heat treatment, have successfully reduced deterioration change over time to the minimum.

CERA Blocks

CERA blocks, made of ceramic materials with superior surface quality, that were developed by Mitutoyo's ultra precision machining techniques solve all problems that the steel gage block had.

1. Corrosion-Resistant

Anti-corrosion treatment is not required when handled normally (i.e. with fingers), resulting in simple maintenance and storage.

2. No Burrs Caused by Dents, etc.

Since the CERA Block is very hard, it will not scratch and is highly resistant to burrs. If a burr is formed, it can easily be removed with a ceramic deburring stone (Ceraston).

3. Abrasion Resistant


CERA Blocks have 10 times the abrasion resistance of steel gage blocks.

4. Dimensional Stability

CERA Blocks are free from dimensional change over time.


5. Marking

The black characters, indicating the nominal length, are inscribed by laser and are clearly visible against the white surface of the block.

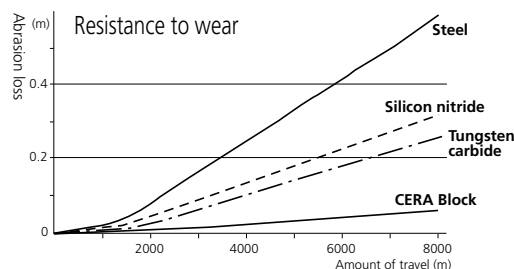


Selecting Gage Blocks

- Select gage blocks in accordance with the combination range required. If a large length is required, add a long block set.
- Select gage blocks in accordance with the minimum length step required. Add wear block sets if necessary.
- If a set containing a large number of gage blocks is selected, the number of combination gage blocks required for a length is reduced and the number of combinations is increased. The accuracy will be retained and damage will be reduced.
- The specific gage block set for micrometer inspection and caliper inspection is available.
- If using only one length repeatedly, it is a good idea to purchase discrete gage blocks.
- The 2mm-based gage blocks, which take the base of the minimum length step as 2mm, are easy to handle and will not warp, as compared to the 1mm-based gage blocks.



Rectangular Block

Gage Size	Face Width (A)	Face Depth (B)
Up to 2"	1.181"	.355"
Over .2" up to 40"	1.378"	.355"
Up to 10mm	30mm	9mm
Over 10mm up to 1000mm	35mm	9mm



Square Block

Gage Size	Face Width (C)	Face Depth (D)
Inch (up to 40")	.95"	.95"
Metric (up to 1000mm)	24.1mm	24.1mm

Grade and Application

Refer to the following table to select the gage block grade according to usage.

	Applications	Grade
Workshop use	• Mounting tools and cutters	AS-1 or AS-2
	• Manufacturing gages • Calibrating instruments	0 or AS-1
Inspection use	• Inspecting mechanical parts, tools, etc.	0 or AS-1
	• Checking the accuracy of gages • Calibrating instruments	00 or 0
Calibration use	• Checking the accuracy of gage blocks for workshop • Checking the accuracy of gage blocks for inspection • Checking the accuracy of instruments	K or 00
Reference use	• Checking the accuracy of gage blocks for calibration • For academic research	K

Grade AS-1:

These gage blocks are intended for shop floor use to set and calibrate fixtures as well as precision instruments.

Grade 0:

This grade is used within an inspection area to verify the accuracy of plug and snap gages as well as for setting electronic measuring devices.

Grade 00:

These higher accuracy gages are intended for use within a controlled environment by skilled inspection staff. Mainly used as reference standards for setting high precision measuring equipment and for the calibration of lower grade gage blocks.

Grade K:

Gage blocks of this accuracy are intended for use within a temperature controlled inspection room or calibration laboratory. They should be used as masters with certificates against other gage blocks which are calibrated by comparison.

Combination of a Required Length

Multiple combinations of gage blocks can be used to make a required length. Care should be exercised in the following points.

1. Use as few gage blocks as possible to obtain the required length. (= Select thick gage blocks whenever possible.)
2. Select gage blocks starting with the one that has least significant digit required, and then work up to ones with more significant digits.
3. There are multiple combinations for the integer part of a length. To prevent wear as much as possible, do not always use the same gage blocks.

Example combination
Required length = 45.6785mm

For the 1mm-based gage block set (112 pcs.)

1.0005
1.008
1.17
17.5
+ 25
45.6785mm

For the 2mm-based gage block set (112 pcs.)

2.0005
2.008
2.17
14.5
+ 25
45.6785mm

6. Anti-magnetic Nature Keeps Away Steel Powders

7. High wringing force

An even, dense tissue can maintain a strong wringing force.



8. Material of CERA block


Property	Material	CERA Block (ZrO ₂)	Steel (Fe)	Carbide (WC-Co)	Silicon nitride (Si ₃ N ₄)
Hardness (HV)		1350	800	1650	1500
Coefficient of thermal expansion (10 ⁻⁶ /K)		9.3±0.5	10.8±0.5	5.5±1.0	2
Flexural strength by 3-point bending (MPa)		1270	1960	1960	580
Fracture toughness K1c (MPa•m ^{1/2})		7	120	12	6.5
Young's modulus x104 (MPa)		20.6	20.6	61.8	28.4
Poisson's ratio		0.3	0.3	0.2	0.3
Specific gravity		6.0	7.8	14.8	3.2
Thermal conductivity (W/m•k)		2.9	54.4	79.5	16.7

9. Closest Expansion Coefficient to Steel

The thermal expansion coefficient of a CERA Block is quite similar to that of a steel gage block.

10. Highly Resistant Against Drops and Other Shocks

The CERA Block material is one of the toughest ceramics materials. It is extremely difficult to crack under normal use.

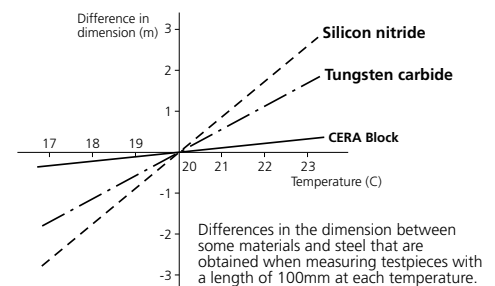

Features of Square Gage Blocks

1. Perfect wringing is possible using the center hole.

After wringing the square gage blocks, an optional tie rod can be inserted through the center hole to fix the blocks using a screw.

2. A height reference standard can easily be made.

A precision height reference standard can be made easily and inexpensively using accessories such as the plain jaw and block base.

3. A dedicated inspection jig can be easily be made.

A dedicated inspection jig for periodic inspection of instruments can be made easily and inexpensively.

4. A wide measuring surface with cross section dimensions of [24.1 x 24.1mm / .95 x .95"] is available.

A square gage block can retain stable orientation both longitudinally and laterally. A wide range of application measurements can be made, including cutting tool positioning, angle measurement with a sine bar, taper measurement with a roller, and inspection of depth micrometers.



Long and Ultra-Thin Gage Blocks

Mitutoyo offers extra thin gage blocks from 0.10 mm to 0.99 mm (increments of 0.01 mm) as well as long gage blocks up to 1,000 mm as standard products.

Gage Block

SERIES 516

Accuracies of Mitutoyo Gage Blocks

All Mitutoyo gage blocks meet or exceed all known specifications. The flatness, parallelism and surface finish necessary to achieve the required accuracies are the same as or better than government requirements.

ASME (American Society of Mechanical Engineers) Deviations and Tolerance on Length for Metric and inch Gage Blocks: ASME B89.1.9-2002 (USA)

Nominal Length Range In inches	Calibration Grade K		Grade 00		Grade 0		Grade AS-1		Grade AS-2	
	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ in.	Tolerance for the Variation In Length $\pm 1\sigma$ in.	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ in.	Tolerance for the Variation In Length $\pm 1\sigma$ in.	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ in.	Tolerance for the Variation In Length $\pm 1\sigma$ in.	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ in.	Tolerance for the Variation In Length $\pm 1\sigma$ in.	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ in.	Tolerance for the Variation In Length $\pm 1\sigma$ in.
$1_n \leq .05$	12	2	4	2	6	4	12	6	24	12
$.05 1_n \leq .4$	10	2	3	2	5	4	8	6	18	12
$.45 1_n \leq 1$	12	2	3	2	6	4	12	6	24	12
$1 1_n \leq 2$	16	2	4	2	8	4	16	6	32	12
$2 1_n \leq 3$	20	2	5	3	10	4	20	6	40	14
$3 1_n \leq 4$	24	3	6	3	12	5	24	8	48	14
$4 1_n \leq 5$	32	3	8	3	16	5	32	8	64	16
$5 1_n \leq 6$	32	3	8	3	16	5	32	8	64	16
$6 1_n \leq 7$	40	4	10	4	20	6	40	10	80	16
$7 1_n \leq 8$	40	4	10	4	20	6	40	10	80	16
$8 1_n \leq 10$	48	4	12	4	24	6	48	10	104	18
$10 1_n \leq 12$	56	4	14	4	28	7	56	10	112	20
$12 1_n \leq 16$	72	5	18	5	36	8	72	12	144	20
$16 1_n \leq 20$	88	6	20	6	44	10	88	14	176	24
$20 1_n \leq 24$	104	6	25	6	52	10	104	16	200	28
$24 1_n \leq 28$	120	7	30	7	60	12	120	18	240	28
$28 1_n \leq 32$	136	8	34	8	68	12	136	20	260	32
$32 1_n \leq 36$	152	8	38	8	76	14	152	20	300	36
$36 1_n \leq 40$	160	10	40	10	80	16	168	24	320	40

Nominal Length Range In mm	Calibration Grade K		Grade 00		Grade 0		Grade AS-1		Grade AS-2	
	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ μ m	Tolerance for the Variation In Length $\pm 1\sigma$ μ m	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ μ m	Tolerance for the Variation In Length $\pm 1\sigma$ μ m	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ μ m	Tolerance for the Variation In Length $\pm 1\sigma$ μ m	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ μ m	Tolerance for the Variation In Length $\pm 1\sigma$ μ m	Limit Deviations of Length at any Point From Nominal Length $\pm 1\sigma$ μ m	Tolerance for the Variation In Length $\pm 1\sigma$ μ m
$1_n \leq 0.5$	0.30	0.05	0.10	0.05	0.14	0.10	0.30	0.16	0.60	0.30
$0.5 1_n \leq 10$	0.20	0.05	0.07	0.05	0.12	0.10	0.20	0.16	0.45	0.30
$10 1_n \leq 25$	0.30	0.05	0.07	0.05	0.14	0.10	0.30	0.16	0.60	0.30
$25 1_n \leq 50$	0.40	0.06	0.10	0.06	0.20	0.10	0.40	0.18	0.80	0.30
$50 1_n \leq 75$	0.50	0.06	0.12	0.06	0.25	0.12	0.50	0.18	1.00	0.35
$75 1_n \leq 100$	0.60	0.07	0.15	0.07	0.30	0.12	0.60	0.20	1.20	0.35
$100 1_n \leq 150$	0.80	0.08	0.20	0.08	0.40	0.14	0.80	0.20	1.60	0.40
$150 1_n \leq 200$	1.00	0.09	0.25	0.09	0.50	0.16	1.00	0.25	2.00	0.40
$200 1_n \leq 250$	1.20	0.10	0.30	0.10	0.60	0.16	1.20	0.25	2.40	0.45
$250 1_n \leq 300$	1.4	0.10	0.35	0.10	0.70	0.18	1.40	0.25	2.80	0.50
$300 1_n \leq 400$	1.80	0.12	0.45	0.12	0.90	0.20	1.80	0.30	3.60	0.50
$400 1_n \leq 500$	2.20	0.14	0.50	0.14	1.10	0.25	2.20	0.35	4.40	0.60
$500 1_n \leq 600$	2.60	0.16	0.65	0.16	1.30	0.25	2.60	0.40	5.00	0.70
$600 1_n \leq 700$	3.00	0.18	0.75	0.18	1.50	0.30	3.00	0.45	6.00	0.70
$700 1_n \leq 800$	3.40	0.20	0.85	0.20	1.70	0.30	3.40	0.50	6.50	0.80
$800 1_n \leq 900$	3.80	0.20	0.95	0.20	1.90	0.35	3.80	0.50	7.50	0.90
$900 1_n \leq 1000$	4.20	0.25	1.00	0.25	2.00	0.40	4.20	0.60	8.00	1.00

Mitutoyo Gage Blocks and Inspection Certificates

A Certificate of Inspection is furnished with all Mitutoyo gage blocks with a serial number on the case and an identification number on each block. The deviation of each block is registered. For this inspection, each gage block is measured relative to the upper level master using a gage block comparator. Grade K gage blocks are manufactured by absolute measurement using an interferometer. The gage block set and discrete gage block are supplied with a Certificate of Calibration. The Certificate of Calibration specifies the deviation from the nominal length. (Comparative measurement, however, is performed for all square gage blocks.)



A Certificate of Accuracy, traceable to the NIST, is furnished with each MITUTOYO gage block set and individual block

Metric Rectangular Gage Block Set

SERIES 516 — 1mm Base Block Set



Steel 112-block set



Steel 103-block set



Steel 47-block set



CERA 112-block set




CERA 56-block set



CERA/Steel combination
47-block set

Provided with Inspection Certificate

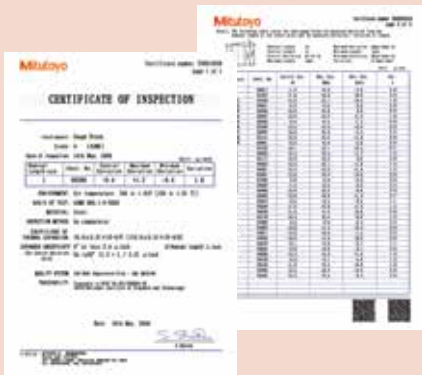

SPECIFICATIONS

1mm Base Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
112	516-531-56	516-541-56	K	1.0005		1
	516-937-26	516-337-26	00	1.001 - 1.009	0.001	9
	516-938-26	516-338-26	0	1.01 - 1.49	0.01	49
	516-939-26	516-339-26	AS-1	0.5 - 24.5	0.5	49
	516-940-26	516-340-26	AS-2	25 - 100	25	4
103	516-533-56	516-542-56	K	1.005		1
	516-941-26	516-341-26	00	1.01 - 1.49	0.01	49
	516-942-26	516-342-26	0	0.5 - 24.5	0.5	49
	516-943-26	516-343-26	AS-1	25 - 100	25	4
	516-944-26	516-344-26	AS-2			
87	516-535-56	516-543-56	K	1.001 - 1.009	0.001	9
	516-945-26	516-345-26	00	1.01 - 1.49	0.01	49
	516-946-26	516-346-26	0	0.5 - 9.5	0.5	19
	516-947-26	516-347-26	AS-1	10 - 100	10	10
	516-948-26	516-348-26	AS-2			
56	516-536-56	516-544-56	K	0.5		1
	516-953-26	516-353-26	00	1.001 - 1.009	0.001	9
	516-954-26	516-354-26	0	1.01 - 1.09	0.01	9
	516-955-26	516-355-26	AS-1	1.1 - 1.9	0.1	9
	516-956-26	516-356-26	AS-2	1 - 24	1	24
				25 - 100	25	4
47	516-537-56	516-545-56	K	1.005		1
	516-957-26	516-357-26	00	1.01 - 1.09	0.01	9
	516-958-26	516-358-26	0	1.1 - 1.9	0.1	9
	516-959-26	516-359-26	AS-1	1 - 24	1	24
	516-960-26	516-360-26	AS-2	25 - 100	25	4

Metric Rectangular Gage Block Set

SERIES 516 — Long Block Set, Wear Block Set



CERA 8-block set



Steel 8-block set

Provided with Inspection Certificate

SPECIFICATIONS

Long Block Set


Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
8	—	516-547-56	K	25-200	25	8
	—	516-164-26	00	—	—	—
	516-115-26	516-165-26	0	—	—	—
	516-116-26	516-166-26	AS-1	—	—	—
8	516-540-56	516-546-56	K	125 - 175	25	3
	516-701-26	516-731-26	00	200 - 250	50	2
	516-702-26	516-732-26	0	300 - 500	100	3
	516-703-26	516-733-26	AS-1	—	—	—
	—	—	—	—	—	—



CERA 2-block set



Carbide 2-block



SPECIFICATIONS

Wear Block Set

Blocks per set	Order No.		Grade	Blocks included in set	
	Carbide	CERA		Size	Qty.
2	516-807-26	516-832-26	0	1	2
	516-806-26	516-833-26	AS-1	—	—
2	516-803-26	516-830-26	0	2	2
	516-802-26	516-831-26	AS-1	—	—

Inch Rectangular Gage Block Set

SERIES 516 — Inch Block Set, Thin Block Set, Long Block Set, Wear Block Set

SPECIFICATIONS

Inch Block Set

Blocks per set	Order No.			Grade	Blocks included in set		
	Steel	CERA	Steel/CERA		Size	Step	Qty.
81	516-549-56	516-557-56	—	K	.1001 – .1009	.0001	9
	516-901-26	516-301-26	—	00	.101 – .149	.001	49
	516-902-26	516-302-26	516-302-27**	0	.05 – .95	.05	19
	516-903-26	516-303-26	—	AS-1	1 - 4	1	4
	516-904-26	516-304-26	—	AS-2			
35	516-550-56	516-558-56	—	K	.10005		1
	516-913-26	516-313-26	—	00	.1001 – .1009	.0001	9
	516-914-26	516-314-26	—	0	.101 – .109	.001	9
	516-915-26	516-315-26	—	AS-1	.11 – .19	.01	9
	516-916-26	516-316-26	—	AS-2	.1 - .3	.1	3
					.5, 1, 2, 4		4

**CERA blocks are adopted for frequently-used blocks.

81-block set: All are CERA blocks. Except 2", 3", and 4" are Steel blocks

Provided with Inspection Certificate



SPECIFICATIONS

Thin Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
28	516-551-56	—	K	.02005		1
	516-917-26	—	00	.0201 – .0209	.0001	9
	516-918-26	—	0	.021 – .029	.001	9
	516-919-26	—	AS-1	.01 – .09	.01	9
	516-920-26	—	AS-2			
10	516-926-26	—	0	.005 - .050	.005	10
	516-927-26	—	AS-1			

SPECIFICATIONS

Long Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
8	516-126-26	516-176-26	0	1-8	1	8
	516-127-26	516-177-26	AS-1			
8	—	516-564-56	K	5 - 7	1	3
	—	516-741-26	00	8, 10, 12	2	3
	516-712-26	516-742-26	0	16, 20	4	2
	516-713-26	516-743-26	AS-1			

SPECIFICATIONS

Wear Block Set

Blocks per set	Order No.		Grade	Blocks included in set	
	Carbide	CERA		Size	Qty.
2	516-809-26	516-836-26	0	.05	2
	516-808-26	516-837-26	AS-1		
2	516-805-26	516-834-26	0	.1	2
	516-804-26	516-835-26	AS-1		

Micrometer Inspection Gage Block Sets

SERIES 516

- Can be fixed a series of gage blocks to be used for micrometer inspection.
- Can be measured in both vertical and horizontal posture.
- Parallelism is measured by attaching the optical parallel (optional accessory) to the GB set.

SPECIFICATIONS

Metric Micro Checker (holder only)

Order No.	516-607
Applicable gage block set	516-106-26, 516-107-26, 516-156-26, 516-157-26
Applicable gage block size (mm)	2.5, 5.1, 7.7, 10.3, 12.9, 15, 17.6, 20.2, 22.8, 25

Inch/Metric Micro Checker (holder only)

Order No.	516-608
Applicable gage block set	516-921-26, 516-922-26, 516-923-26, 516-321-26, 516-322-26, 516-323-26
Applicable gage block size (inch)	.105, .210, .315, .420, .5, .605, .815, .920

Metric Block Set

Blocks per set	Order No.		Grade	Blocks included in set
	Steel	CERA		
10	516-103-26 516-101-26	516-152-26 516-153-26	0 AS-1	1.00, 1.25, 1.50, 2, 3, 5, 10, 15, 20, 25mm
10	516-106-26 516-107-26	516-156-26 516-157-26	0 AS-1	2.5, 5.1, 7.7, 10.3, 12.9, 15, 17.6, 20.2, 22.8, 25mm • Optical parallel (t = 12mm)

Inch Block Set

Blocks per set	Order No.		Grade	Blocks included in set
	Steel	CERA		
10	516-552-56 516-921-26 516-922-26 516-923-26	516-559-56 516-321-26 516-322-26 516-323-26	K 00 0 AS-1	.105, .210, .315, .420, .500, .605, .710, .815, .920, 1" • Optical parallel (t = .5")
10	516-529-26*	516-319-26*	0	.087, .189, .307, .409, .472, .598, .669, .772, .890, 1" • Optical parallel (t = .5")
9	516-554-56 516-929-26 516-930-26 516-931-26	516-561-56 516-333-26 516-334-26 516-335-26	K 00 0 AS-1	.0625, .100, .125, .200, .250, .300, .500, 1, 2" • Optical parallel (t = .5")
9	— — 516-934-26 516-935-26	516-563-56 516-329-26 516-330-26 516-331-26	K 00 0 AS-1	.0625, .100, .125, .200, .250, .300, .500, 1, 2"

* For QuantuMike

Micro Checker



(Gage Blocks are optional)

Bore Gage Calibration Kit

SERIES 516

SPECIFICATIONS

Blocks per set	Order No.	Grade	Blocks included in set
	Carbide		Size
9	516-120-26	0	.04", .08", .16", .2", .4", .8", 1", 2", 3" 619018 (plain jaw 2 pc. set) and 619004 (160mm holder)

Individual Metric Rectangular Gage Block

FEATURES

- If using only one length repeatedly, it is a good idea to purchase discrete gage blocks.
- Each gage block is supplied with a Certificate of Inspection.
- Each Grade K gage block of ASME standard is specially supplied with a Certificate of Calibration which certifies that the gage block was manufactured through interferometry.



Suffix Number for Selecting Standard and Certificate Provided

ASME	
Grade	Steel, CERA
K	-516**
00	-521*
0	-531*
AS-1	-541*
AS-2	-551*

* provided with Inspection Certificate

** provided with Calibration Certificate and Inspection Certificate

Example: 611821-521

0.1mm gage block in grade 00.

We make custom length gage block length:
0.1-1000mm



Inspection Certificate

SPECIFICATIONS

Metric Block

Length (mm)	Order No.		Length (mm)	Order No.		Length (mm)	Order No.	
	Steel	CERA		Steel	CERA		Steel	CERA
0.1	611821	—	0.53	611894	—	0.96	611937	—
0.11	611860	—	0.54	611895	—	0.97	611938	—
0.12	611861	—	0.55	611896	—	0.98	611939	—
0.13	611862	—	0.56	611897	—	0.99	611940	—
0.14	611863	—	0.57	611898	—	0.991	611551	613551
0.15	611822	—	0.58	611899	—	0.992	611552	613552
0.16	611864	—	0.59	611900	—	0.993	611553	613553
0.17	611865	—	0.6	611901	—	0.994	611554	613554
0.18	611866	—	0.61	611902	—	0.995	611555	613555
0.19	611867	—	0.62	611903	—	0.996	611556	613556
0.2	611823	—	0.63	611904	—	0.997	611557	613557
0.21	611868	—	0.64	611905	—	0.998	611558	613558
0.22	611869	—	0.65	611906	—	0.999	611559	613559
0.23	611870	—	0.66	611907	—	1	611611	613611
0.24	611871	—	0.67	611908	—	1.0005	611520	613520
0.25	611824	—	0.68	611909	—	1.001	611521	613521
0.26	611872	—	0.69	611910	—	1.002	611522	613522
0.27	611873	—	0.7	611911	—	1.003	611523	613523
0.28	611874	—	0.71	611912	—	1.004	611524	613524
0.29	611875	—	0.72	611913	—	1.005	611525	613525
0.3	611825	—	0.73	611914	—	1.006	611526	613526
0.31	611876	—	0.74	611915	—	1.007	611527	613527
0.32	611877	—	0.75	611916	—	1.008	611528	613528
0.33	611878	—	0.76	611917	—	1.009	611529	613529
0.34	611879	—	0.77	611918	—	1.01	611561	613561
0.35	611826	—	0.78	611919	—	1.02	611562	613562
0.36	611880	—	0.79	611920	—	1.03	611563	613563
0.37	611881	—	0.8	611921	—	1.04	611564	613564
0.38	611882	—	0.81	611922	—	1.05	611565	613565
0.39	611883	—	0.82	611923	—	1.06	611566	613566
0.4	611827	—	0.83	611924	—	1.07	611567	613567
0.41	611884	—	0.84	611925	—	1.08	611568	613568
0.42	611885	—	0.85	611926	—	1.09	611569	613569
0.43	611886	—	0.86	611927	—	1.1	611570	613570
0.44	611887	—	0.87	611928	—	1.11	611571	613571
0.45	611828	—	0.88	611929	—	1.12	611572	613572
0.46	611888	—	0.89	611930	—	1.13	611573	613573
0.47	611889	—	0.9	611931	—	1.14	611574	613574
0.48	611890	—	0.91	611932	—	1.15	611575	613575
0.49	611891	—	0.92	611933	—	1.16	611576	613576
0.5	611506	613506	0.93	611934	—	1.17	611577	613577
0.51	611892	—	0.94	611935	—	1.18	611578	613578
0.52	611893	—	0.95	611936	—	1.19	611579	613579

Length (mm)	Order No.	
	Steel	CERA
1.2	611580	613580
1.21	611581	613581
1.22	611582	613582
1.23	611583	613583
1.24	611584	613584
1.25	611585	613585
1.26	611586	613586
1.27	611587	613587
1.28	611588	613588
1.29	611589	613589
1.3	611590	613590
1.31	611591	613591
1.32	611592	613592
1.33	611593	613593
1.34	611594	613594
1.35	611595	613595
1.36	611596	613596
1.37	611597	613597
1.38	611598	613598
1.39	611599	613599
1.4	611600	613600
1.41	611601	613601
1.42	611602	613602
1.43	611603	613603
1.44	611604	613604
1.45	611605	613605
1.46	611606	613606
1.47	611607	613607
1.48	611608	613608
1.49	611609	613609
1.5	611641	613641
1.6	611516	613516
1.7	611517	613517
1.8	611518	613518
1.9	611519	613519
2	611612	613612
2.0005	611690	—
2.001	611691	—
2.002	611692	—
2.003	611693	—
2.004	611694	—
2.005	611695	—
2.006	611696	—
2.007	611697	—
2.008	611698	—
2.009	611699	—
2.01	611701	—
2.02	611702	—
2.03	611703	—
2.04	611704	—
2.05	611705	—
2.06	611706	—
2.07	611707	—
2.08	611708	—
2.09	611709	—
2.1	611710	—
2.11	611711	—
2.12	611712	—
2.13	611713	—
2.14	611714	—
2.15	611715	—
2.16	611716	—

Length (mm)	Order No.	
	Steel	CERA
2.17	611717	—
2.18	611718	—
2.19	611719	—
2.2	611720	—
2.21	611721	—
2.22	611722	—
2.23	611723	—
2.24	611724	—
2.25	611725	—
2.26	611726	—
2.27	611727	—
2.28	611728	—
2.29	611729	—
2.3	611730	—
2.31	611731	—
2.32	611732	—
2.33	611733	—
2.34	611734	—
2.35	611735	—
2.36	611736	—
2.37	611737	—
2.38	611738	—
2.39	611739	—
2.4	611740	—
2.41	611741	—
2.42	611742	—
2.43	611743	—
2.44	611744	—
2.45	611745	—
2.46	611746	—
2.47	611747	—
2.48	611748	—
2.49	611749	—
2.5	611642	613642
2.6	611750	—
2.7	611751	—
2.8	611752	—
2.9	611753	—
3	611613	613613
3.5	611643	613643
4	611614	613614
4.5	611644	613644
5	611615	613615
5.1	611850	613850
5.5	611645	613645
6	611616	613616
6.5	611646	613646
7	611617	613617
7.5	611647	613647
7.7	611851	613851
8	611618	613618
8.5	611648	613648
9	611619	613619
9.5	611649	613649
10	611671	613671
10.3	611852	613852
10.5	611650	613650
11	611621	613621
11.5	611651	613651
12	611622	613622
12.5	611652	613652
12.9	611853	613853

Length (mm)	Order No.	
	Steel	CERA
13	611623	613623
13.5	611653	613653
14	611624	613624
14.5	611654	613654
15	611625	613625
15.5	611655	613655
16	611626	613626
16.5	611656	613656
17	611627	613627
17.5	611657	613657
17.6	611854	613854
18	611628	613628
18.5	611658	613658
19	611629	613629
19.5	611659	613659
20	611672	613672
20.2	611855	613855
20.5	611660	613660
21	611631	613631
21.5	611661	613661
22	611632	613632
22.5	611662	613662
22.8	611856	613856
23	611633	613633
23.5	611663	613663
24	611634	613634
24.5	611664	613664
25	611635	613635
25.25	611754	613754
30	611673	613673
35	611755	613755
40	611674	613674
41.3	611857	613857
45	611756	613756
50	611675	613675
60	611676	613676
70	611677	613677
75	611801	613801
80	611678	613678
90	611679	613679
100	611681	613681
125	611802	613802
131.4	611858	613858
150	611803	613803
175	611804	613804
200	611682	613682
250	611805	613805
300	611683	613683
400	611684	613684
500	611685	613685
600	611840	—
700	611841	—
750	611842	—
800	611843	—
900	611844	—
1000	611845	—


Metric Wear Block

Length (mm)	Order No.
	Tungsten carbide
1	612611
2	612612


DIMENSIONS

Unit: mm


Nominal length:
0.1mm - 5.5mm




Nominal length:
6mm - 10mm



Nominal length:
10.3mm - 100mm



Nominal length 125mm - 1000mm

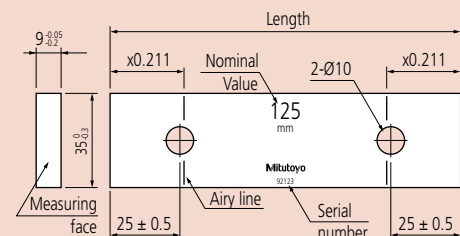

Suffix Number for Selecting Standard and Certificate Provided

ASME	
Grade	Steel, CERA
K	-516**
00	-521*
0	-531*
AS-1	-541*
AS-2	-551*

* provided with Inspection Certificate
 ** provided with Calibration Certificate and Inspection Certificate

Example: 611310-521

.1" gage block in grade 00.

We make custom length gage block length:

.004 - 20"




Inspection Certificate


DIMENSIONS

Unit: Inch


Nominal length:
 .004 - .25"




Nominal length:
 .3 - 4"



Nominal length:
 .45 - 4"



Nominal length 5 - 20"

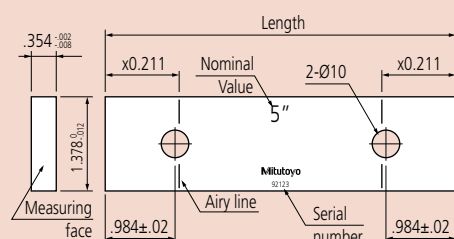

Individual Inch Rectangular Gage Block

SPECIFICATIONS

Inch Block

Length (inch)	Order No.	
	Steel	CERA
.004	611304	—
.005	611305	—
.006	611306	—
.007	611307	—
.008	611308	—
.009	611309	—
.01	611310	—
.011	611311	—
.012	611312	—
.013	611313	—
.014	611314	—
.015	611315	—
.016	611316	—
.017	611317	—
.018	611318	—
.019	611319	—
.02	611320	—
.02005	611240	—
.0201	611231	—
.0202	611232	—
.0203	611233	—
.0204	611234	—
.0205	611235	—
.0206	611236	—
.0207	611237	—
.0208	611238	—
.0209	611239	—
.021	611321	—
.022	611322	—
.023	611323	—
.024	611324	—
.025	611325	—
.026	611326	—
.027	611327	—
.028	611328	—
.029	611329	—
.03	611330	—
.031	611331	—
.03125 (1/32)	611101	613103
.032	611332	—
.033	611333	—
.034	611334	—
.035	611335	—
.036	611336	—
.037	611337	—
.038	611338	—
.039	611339	—
.04	611340	—
.041	611341	—
.042	611342	—
.043	611343	—
.044	611344	—
.045	611345	—
.046	611346	—
.046875 (3/64)	611102	613104
.047	611347	—
.048	611348	—
.049	611349	—
.05	611105	613105

Length (inch)	Order No.	
	Steel	CERA
.06	611106	—
.0625	611303	613303
.07	611107	—
.078125 (5/64)	611103	613100
.08	611108	—
.09	611109	—
.09375 (3/32)	611104	613101
.1	611191	613191
.100025	611111	613110
.10005	611135	613135
.100075	611112	613111
.1001	611121	613121
.1002	611122	613122
.1003	611123	613123
.1004	611124	613124
.1005	611125	613125
.1006	611126	613126
.1007	611127	613127
.1008	611128	613128
.1009	611129	613129
.101	611141	613141
.102	611142	613142
.103	611143	613143
.104	611144	613144
.105	611145	613145
.106	611146	613146
.107	611147	613147
.108	611148	613148
.109	611149	613149
.109375 (7/64)	611110	613102
.11	611150	613150
.111	611151	613151
.112	611152	613152
.113	611153	613153
.114	611154	613154
.115	611155	613155
.116	611156	613156
.117	611157	613157
.118	611158	613158
.119	611159	613159
.12	611160	613160
.121	611161	613161
.122	611162	613162
.123	611163	613163
.124	611164	613164
.125	611165	613165
.126	611166	613166
.127	611167	613167
.128	611168	613168
.129	611169	613169
.13	611170	613170
.131	611171	613171
.132	611172	613172
.133	611173	613173
.134	611174	613174
.135	611175	613175
.136	611176	613176
.137	611177	613177
.138	611178	613178

Length (inch)	Order No.	
	Steel	CERA
.139	611179	613179
.14	611180	613180
.141	611181	613181
.142	611182	613182
.143	611183	613183
.144	611184	613184
.145	611185	613185
.146	611186	613186
.147	611187	613187
.148	611188	613188
.149	611189	613189
.15	611115	613115
.16	611116	613116
.17	611117	613117
.18	611118	613118
.19	611119	613119
.2	611192	613192
.21	611221	613221
.25	611212	613212
.3	611193	613193
.315	611209	613209
.35	611213	613213
.375 (3/8)	611113	613112
.4	611194	613194
.420	611210	613210
.45	611214	613214
.5	611195	613195
.55	611215	613215
.6	611196	613196
.605	611211	613211
.65	611216	613216
.7	611197	613197
.710	611220	613220
.75	611217	613217
.8	611198	613198
.815	611226	613226
.85	611218	613218
.9	611199	613199
.920	611227	613227
.95	611219	613219
1	611201	613201
2	611202	613202
3	611203	613203
4	611204	613204
5	611205	613205
6	611206	613206
7	611207	613207
8	611208	613208
10	611222	613222
12	611223	613223
16	611224	613224
20	611225	613225

Inch Wear Block


Length (inch)	Order No.
	Tungsten carbide
.05	612105
.1	612191

Rectangular Gage Block with CTE

Gage Blocks with Thermal Expansion Coefficient Data

FEATURES

- Mitutoyo offers top-level gage blocks (steel and ceramic) which are superior to the K class blocks, with their quality supported by Mitutoyo's best technologies.
- Comes with a highly accurate thermal expansion coefficient measured with a high accuracy double-faced interferometer (DFI).
- The high accuracy gage block interferometer (GBI) guarantees a high dimensional accuracy.
- Mitutoyo offers rectangular gage blocks, having nominal values from 100 to 500mm Grade: K class in ASME
Uncertainty of thermal expansion coefficient: $0.035 \times 10^{-6}/K$ ($k = 2$)
Uncertainty of dimension measurement: 30nm ($k = 2$), for 100mm block

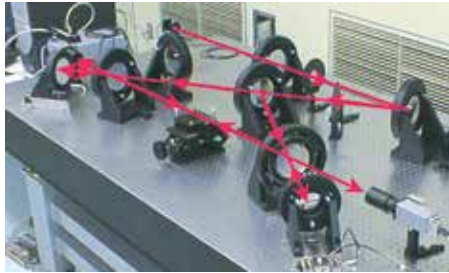

double-faced interferometer (DFI)

SPECIFICATIONS


Metric Block with CTE		
Length (mm)	Order No. Steel	Order No. CERA
100	611681-51B	613681-51B
125	611802-51B	613802-51B
150	611803-51B	613803-51B
175	611804-51B	613804-51B
200	611682-51B	613682-51B
250	611805-51B	613805-51B
300	611683-51B	613683-51B
400	611684-51B	613684-51B
500	611685-51B	613685-51B

Inch Block with CTE		
Length (inch)	Order No. Steel	Order No. CERA
4	611204-51B	613204-51B
5	611205-51B	613205-51B
6	611206-51B	613206-51B
7	611207-51B	613207-51B
8	611208-51B	613208-51B
10	611222-51B	613222-51B
12	611223-51B	613223-51B
16	611224-51B	613224-51B
20	611225-51B	613225-51B

*Suffix Number for Selecting Standard and Certificate Provided

ASME	
	Steel, CERA
Grade K	-51B

-51B: provided with JCSS Calibration Certificate and Inspection Certificate

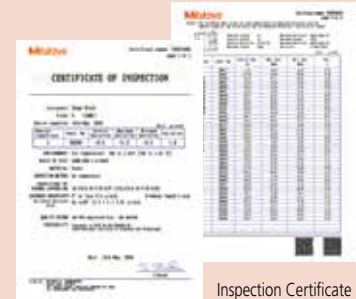

Inspection Certificate

ZERO CERA Blocks

- Thermal expansion in the temperature range $20 \pm 1^\circ C$ less than $1/500$ that of steel ($0 \pm 0.02 \times 10^{-6}/K (20^\circ C)$)
- Almost no secular change both in dimension and coefficient of thermal expansion
- Complementary ultra-low thermal expansion and high specific rigidity (Young's modulus/specific gravity)



SPECIFICATIONS

Metric Blocks			
Order No.			Length (mm)
JIS/ISO/DIN	BS	ASME	
617673-016	617673-116	617673-516	30
617675-016	617675-116	617675-516	50
617681-016	617681-116	617681-516	100
617682-016	617682-116	617682-516	200
617683-016	617683-116	617683-516	300
617684-016	617684-116	617684-516	400
617685-016	617685-116	617685-516	500
617840-016	617840-116	617840-516	600
617841-016	617841-116	617841-516	700
617843-016	617843-116	617843-516	800
617844-016	617844-116	617844-516	900
617845-016	617845-116	617845-516	1000
516-771-60	516-771-61	516-771-66	Above set



Rectangular Gage Block Accessories

SERIES 516 – For Gage Blocks over 100mm

Specially designed for the long gage blocks over 100mm which have two holes on the body for coupling.



516-605

SPECIFICATIONS


Accessories for gage blocks over 100mm

Order No. 516-605	Included in set
1 pc.	Holder A (619031)
1 pc.	Holder B (619032)
1 pc.	Holder C (619033)
1 pc.	Holder D (619034)
1 pc.	Holder E (619035)
3 pcs.	Adaptor (619036)
1 pc.	Holder base 35mm (619009)
2 pcs.	Half round jaw 12mm (619013)
1 pc.	Plain jaw (2 pc. set) (619018)
1 pc.	Scriber point (619019)

Note: These accessories can be used for inch rectangular gage blocks.

Holder A: 619031


Used for coupling two long gage blocks.



Holder B and C:


Used for coupling two long gage blocks together with other gage blocks up to 35mm (Holder B) or 140mm (Holder C). Also used for attaching jaws with two adaptors.

	Order No.	R (max.)	L
Holder B	619032	90mm	126mm
Holder C	619033	200mm	236mm




Holder D: 619034

Used for attaching to the holder base.




Holder E: 619035

Used for attaching to the holder base together with other gage blocks up to 125mm. Used for attaching jaws with one adaptor.




Holder base: 619009


Adaptor: 619036

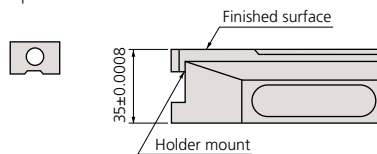


Half round jaw: 619013

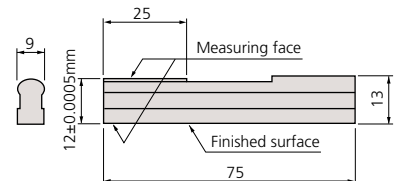

Plain jaw: 619018 (2 pc. set)



Scriber point: 619019



Rectangular Gage Block Accessories

SERIES 516

To expand the variety of rectangular gage block (steel and CERA) applications, Mitutoyo offers the gage block accessories set. By assembling the items in the set, you can easily and quickly build up a precision measuring instrument.



516-601



516-602

SPECIFICATIONS


Assortment of Accessories

Order No.	Accessories	Metric Set Order No.		Accessory (s) included in a set
		516-601	516-602	
619002	Holder 60mm		•	1 pc.
619003	Holder 100mm	•	•	1 pc.
619004	Holder 160mm	•	•	1 pc.
619005	Holder 250mm	•	•	1 pc.
619009	Holder Base 35mm	•	•	1 pc.
619010	Half round jaw 2mm	•	•	2 pcs.
619011	Half round jaw 5mm	•	•	2 pcs.
619012	Half round jaw 8mm	•	•	2 pcs.
619013	Half round jaw 12mm	•		2 pcs.
619014	Half round jaw 20mm	•		2 pcs.
619018	Plain jaw (2 pc. set) 160mm	•		1 pc.
619019	Scriber point	•	•	1 pc.
619020	Center point	•	•	1 pc.
619021	Tram point	•		2 pcs.
619022	Triangular straightness edge 100mm	•	•	1 pc.
619023	Triangular straight edge 160mm	•		1 pc.
	Total Qty. in set	22 pcs.	14 pcs.	




Rectangular Gage Block Accessories

Holder:
Used as a clamp if using plain jaws, scriber point, etc.

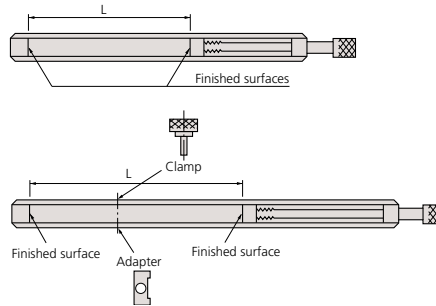


Order No.	L
619002	15 - 61mm
619003	4 - 106mm
619004	62 - 165mm
619005	153 - 256mm

Holder base 35mm: **619009**
Measures a height on the surface plate and scribes a workpiece if used with the holder.




Order No.	A
619009	35±0.005mm


Scriber point: **619019**
Scribes a workpiece if used with the holder and holder base.




Center point: **619020**
Scribes a workpiece if used with the holder and holder base.



Tram point: **619021**
Inspects the scale of the height gage, etc., if used with the holder and holder base.




Plain jaw: **619018**
Measures an outside or inside diameter if used with a pair of jaws and the holder.



Order No.	L
619018*	160mm


* 2 pc. set

Triangular straight edge: Measures parallelism.



Order No.	L
619022	100mm
619023	160mm

Half round jaw:
Measures an outside or inside diameter if used with a pair of jaws and the holder.

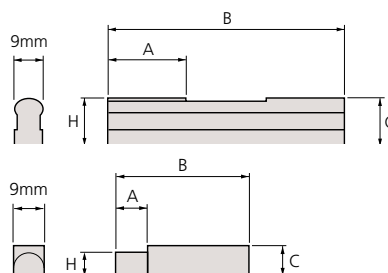

Order No.	H	A	B	C
619010	2±0.0005mm	6mm	40mm	8mm
619011	5±0.0005mm	6mm	50mm	8mm
619012	8±0.0005mm	12mm	60mm	8mm
619013	12±0.0005mm	25mm	75mm	13mm
619014	20±0.0005mm	25mm	125mm	20.5mm

Metric Square Gage Block Set

SERIES 516 — Metric Block Set, Long Block Set, Wear Block Set

A Square Gage Block can retain stable orientation both longitudinally and laterally. A wide range of application measurements can be made, including cutting tool positioning, angle measurement with a sine bar, taper measurement with a roller, and inspection of depth micrometers.



Steel 32-block set



Steel 76-block set



Steel 103-block set



Steel 112-block set

SPECIFICATIONS

Metric Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
112	516-437-26	—	00	1.005		1
	516-438-26	—	0	1.001 - 1.009	0.001	9
	516-439-26	—	AS-1	1.01 - 1.49	0.01	49
	516-440-26	—	AS-2	0.5 - 24.5	0.5	49
	—	—	—	25 - 100	25	4
103	516-441-26	—	00	1.005		1
	516-442-26	—	0	1.01 - 1.49	0.01	49
	516-443-26	—	AS-1	0.5 - 24.5	0.5	49
	516-444-26	—	AS-2	25 - 100	25	4
	—	—	—	—	—	—
76	516-449-26	—	00	1.005		1
	516-450-26	—	0	1.01 - 1.49	0.01	49
	516-451-26	—	AS-1	0.5 - 9.5	0.5	19
	516-452-26	—	AS-2	10 - 40	10	4
	—	—	—	50 - 100	25	3
47	516-457-26	—	00	1.005		1
	516-458-26	—	0	1.01 - 1.09	0.01	9
	516-459-26	—	AS-1	1.1 - 1.9	0.1	9
	516-460-26	—	AS-2	1 - 24	1	24
	—	—	—	25 - 100	25	4
32	516-465-26	—	00	1.005		1
	516-466-26	—	0	1.01 - 1.09	0.01	9
	516-467-26	—	AS-1	1.1 - 1.9	0.1	9
	516-468-26	—	AS-2	1 - 9	1	9
	—	—	—	10 - 30	10	3
—	—	—	—	60		1

Metric Long Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
8	516-751-26	—	00	125, 150, 175	25	3
	516-752-26	—	0	200, 250	50	2
	516-753-26	—	AS-1	300, 400, 500	100	3
	516-754-26	—	AS-2			


Metric Wear Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Carbide	CERA		Size	Step	Qty.
2	516-820-26	—	0	1	—	2
	516-821-26	—	AS-1			
2	516-822-26	—	0	2	—	2
	516-823-26	—	AS-1			

Provided with Inspection Certificate



Provided with Inspection Certificate



Steel 47-block set



Steel 8-block set



Carbide 2-block set

Inch Square Gage Block Set

SERIES 516 — Inch Block Set, Long Block Set, Wear Block Set

SPECIFICATIONS

Inch Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
81	516-401-26	516-201-26	00	.1001 - .1009	.0001	9
	516-402-26	516-202-26	0	.101 - .149	.001	49
	516-403-26	516-203-26	AS-1	.05 - .95	.05	19
	516-404-26	516-204-26	AS-2	1 - 4	1	4
36	516-421-26	516-221-26	00	.05"		1
	516-422-26	516-222-26	0	.1001 - .1009	.0001	10
	516-423-26	516-223-26	AS-1	.101 - .109	.001	9
	516-424-26	516-224-26	AS-2	.11 - .19	.01	9
				.1 - .5	.1	5
				1, 2, 4	1	3
28	516-417-26	—	00	.02005"		1
	516-418-26	—	0	.0201 - .0209"	.0001	9
	516-419-26	—	AS-1	.021 - .029"	.001	9
	516-420-26	—	AS-2	.021 - .029"	.01	9
				.10 - .090"		

Inch Long Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Steel	CERA		Size	Step	Qty.
8	516-762-26	—	0	5 - 7	1	3
	516-763-26	—	AS-1	8, 10, 12	2	3
				16, 20	4	2

Inch Wear Block Set

Blocks per set	Order No.		Grade	Blocks included in set		
	Carbide	CERA		Size	Step	Qty.
2	516-824-26	516-846-26	0	.05	—	2
	516-825-26	516-847-26	AS-1			
2	516-826-26	516-844-26	0	.1	—	2
	516-827-26	516-845-26	AS-1			

92 pcs. Gage Blocks with accessories set in wooden box

Blocks in set	Order No.		Grade	Blocks included in set			Individual No.	Description	Qty.
	Steel			Size	Step	Qty			
92	516-405-26	0		.0625		1	619052	Plain Jaw .500"	2
				.078125		1	619051	Half round jaw .250"	2
				.09375		1	619055	Holder base .500"	1
				.100025		1	619057	Flat head screw 1 1/4"	2
				.10005		1	619058	Flat head screw 5/8"	2
				.100075		1	619056	Stud	2
				.109375		1	619066	Knurled head screw	2
				.1001 - .1009	.0001	9	619059	Slotted head nut	2
				.101 - .149	.001	49	619062	Tie rod 3"	1
				.05 - .95	.05	4	619063	Tie rod 2 1/4"	1
				.16 - .19	.01	19	619064	Tie rod 1 1/2"	1
				1 - 4	1	4	619065	3/4"	1

Individual Metric Square Gage Block



SPECIFICATIONS

Metric Block

Length (mm)	Order No.	
	Steel	CERA
0.5	614506	—
1	614611	—
1.0005	614520	—
1.001	614521	—
1.002	614522	—
1.003	614523	—
1.004	614524	—
1.005	614525	—
1.006	614526	—
1.007	614527	—
1.008	614528	—
1.009	614529	—
1.01	614561	—
1.02	614562	—
1.03	614563	—
1.04	614564	—
1.05	614565	—
1.06	614566	—
1.07	614567	—
1.08	614568	—
1.09	614569	—
1.1	614570	—
1.11	614571	—
1.12	614572	—
1.13	614573	—
1.14	614574	—
1.15	614575	—
1.16	614576	—
1.17	614577	—
1.18	614578	—
1.19	614579	—
1.2	614580	—
1.21	614581	—
1.22	614582	—
1.23	614583	—
1.24	614584	—
1.25	614585	—
1.26	614586	—
1.27	614587	—
1.28	614588	—
1.29	614589	—
1.3	614590	—
1.31	614591	—
1.32	614592	—

Length (mm)	Order No.	
	Steel	CERA
1.33	614593	—
1.34	614594	—
1.35	614595	—
1.36	614596	—
1.37	614597	—
1.38	614598	—
1.39	614599	—
1.4	614600	—
1.41	614601	—
1.42	614602	—
1.43	614603	—
1.44	614604	—
1.45	614605	—
1.46	614606	—
1.47	614607	—
1.48	614608	—
1.49	614609	—
1.5	614641	—
1.6	614516	—
1.7	614517	—
1.8	614518	—
1.9	614519	—
2	614612	—
2.5	614642	—
3	614613	—
3.5	614643	—
4	614614	—
4.5	614644	—
5	614615	—
5.5	614645	—
6	614616	—
6.5	614646	—
7	614617	—
7.5	614647	—
8	614618	—
8.5	614648	—
9	614619	—
9.5	614649	—
10	614671	—
10.5	614650	—
11	614621	—
11.5	614651	—
12	614622	—
12.5	614652	—

Length (mm)	Order No.	
	Steel	CERA
13	614623	—
13.5	614653	—
14	614624	—
14.5	614654	—
15	614625	—
15.5	614655	—
16	614626	—
16.5	614656	—
17	614627	—
17.5	614657	—
18	614628	—
18.5	614658	—
19	614629	—
19.5	614659	—
20	614672	—
20.5	614660	—
21	614631	—
21.5	614661	—
22	614632	—
22.5	614662	—
23	614633	—
23.5	614663	—
24	614634	—
24.5	614664	—
25	614635	—
30	614673	—
40	614674	—
50	614675	—
60	614676	—
75	614801	—
100	614681	—
125	614802	—
150	614803	—
175	614804	—
200	614682	—
250	614805	—
300	614683	—
400	614684	—
500	614685	—

Metric Wear Block

Length (mm)	Order No.
1	615611
2	615612

Suffix Number for Selecting Standard and Certificate Provided

ASME

Grade	Steel
K	—
00	-521*
0	-531*
AS-1	-541*
AS-2	-551*

* provided with Inspection Certificate

Example: 614611-521

1mm gage block in grade 00.

We make custom length gage block length: 0.5 - 500mm.



Inspection Certificate

Individual Inch Square Gage Block

Suffix Number for Selecting Standard and Certificate Provided

ASME	
Grade	Steel, CERA
K	—
00	-521*
0	-531*
AS-1	-541*
AS-2	-551*

* provided with Inspection Certificate

Example: 614310-521

.01" gage block in grade 00.

We make custom length gage block length:
.01 - 20"




Inspection Certificate


DIMENSIONS

Nominal length: 0.5mm - 4.5mm
(.010" - .19")


Unit: mm

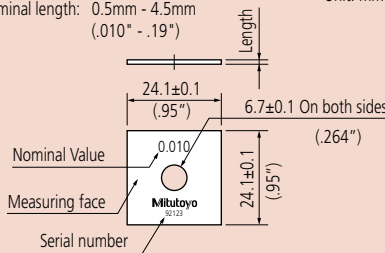

Nominal length: 5mm - 14.5mm
(.02" - .450")

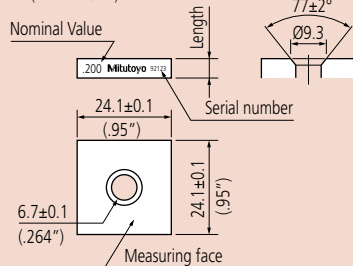

Nominal length: 15mm - 500mm
(.500" - 20")

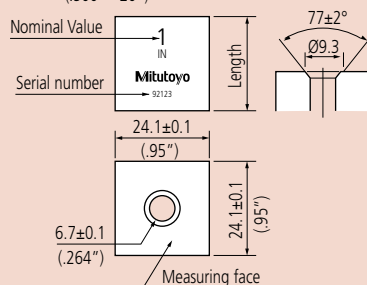

SPECIFICATIONS

Inch Block

Length (inch)	Order No.	
	Steel	CERA
.01	614310	—
.02005	614240	—
.0201	614231	—
.0202	614232	—
.0203	614233	—
.0204	614234	—
.0205	614235	—
.0206	614236	—
.0207	614237	—
.0208	614238	—
.0209	614239	—
.02	614320	—
.021	614321	—
.022	614322	—
.023	614323	—
.024	614324	—
.025	614325	—
.026	614326	—
.027	614327	—
.028	614328	—
.029	614329	—
.03	614330	—
.03125 (1/32)	614301	—
.04	614340	—
.046875 (3/64)	614302	—
.05	614105	616105
.06	614106	—
.0625	614303	616303
.07	614107	—
.078125 (5/64)	614304	—
.08	614108	—
.09	614109	—
.09375 (3/32)	614305	—
.1	614191	616191
.100025	614307	—
.10005	614135	616135
.100075	614308	—
.1001	614121	616121
.1002	614122	616122
.1003	614123	616123
.1004	614124	616124
.1005	614125	616125
.1006	614126	616126
.1007	614127	616127
.1008	614128	616128
.1009	614129	616129
.101	614141	616141
.102	614142	616142
.103	614143	616143
.104	614144	616144
.105	614145	616145

Length (inch)	Order No.	
	Steel	CERA
.106	614146	616146
.107	614147	616147
.108	614148	616148
.109	614149	616149
.109375 (7/64)	614306	—
.11	614150	616150
.111	614151	616151
.112	614152	616152
.113	614153	616153
.114	614154	616154
.115	614155	616155
.116	614156	616156
.117	614157	616157
.118	614158	616158
.119	614159	616159
.12	614160	616160
.121	614161	616161
.122	614162	616162
.123	614163	616163
.124	614164	616164
.125	614165	616165
.126	614166	616166
.127	614167	616167
.128	614168	616168
.129	614169	616169
.13	614170	616170
.131	614171	616171
.132	614172	616172
.133	614173	616173
.134	614174	616174
.135	614175	616175
.136	614176	616176
.137	614177	616177
.138	614178	616178
.139	614179	616179
.14	614180	616180
.141	614181	616181
.142	614182	616182
.143	614183	616183
.144	614184	616184
.145	614185	616185
.146	614186	616186
.147	614187	616187
.148	614188	616188
.149	614189	616189
.15	614115	616115
.16	614116	616116
.17	614117	616117
.18	614118	616118
.19	614119	616119
.2	614192	616192

Length (inch)	Order No.	
	Steel	CERA
.25	614212	616212
.3	614193	616193
.35	614213	616213
.375 (3/8)	614309	—
.4	614194	616194
.45	614214	616214
.5	614195	616195
.55	614215	616215
.6	614196	616196
.65	614216	616216
.7	614197	616197
.75	614217	616217
.8	614198	616198
.85	614218	616218
.9	614199	616199
.95	614219	616219
1	614201	616201
2	614202	616202
3	614203	616203
4	614204	616204
5	614205	—
6	614206	—
7	614207	—
8	614208	—
10	614222	—
12	614223	—
16	614224	—
20	614225	—


Inch Wear Block

Length (inch)	Order No. Tungsten carbide
.05	615105
.1	615191

Square Gage Block Accessories

SERIES 516

To expand the variety of Square Gage Block applications, Mitutoyo offers the Gage Block Accessories Set. By assembling the items in the set, you can easily and quickly build up a precision measuring instrument.

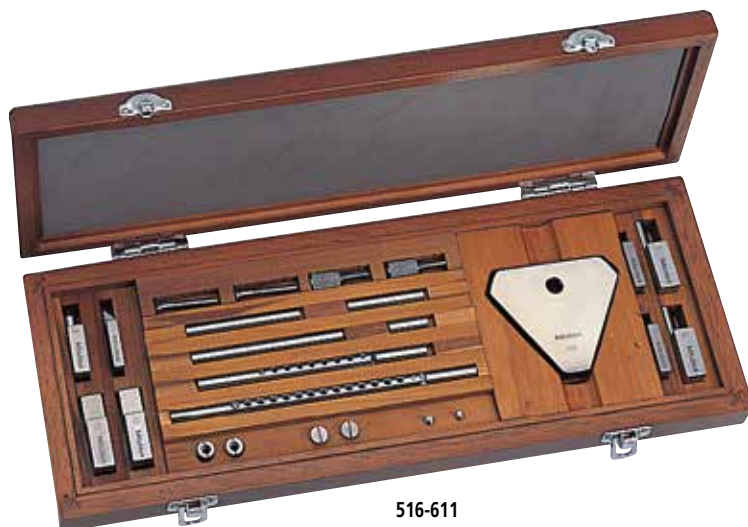

516-611


SPECIFICATIONS

Metric	
Order No. 516-611	Included in set
2 pcs.	Half round jaw 2mm (619070)
2 pcs.	Half round jaw 5mm (619071)
2 pcs.	Plain jaw (619072)
1 pc.	Center point (619073)
1 pc.	Scriber point (619054)
1 pc.	Block base (619074)
2 pcs.	Flat head screw 1-1/4" (619057)
2 pcs.	Flat head screw 5/8" (619058)
2 pcs.	Slotted head nut (619059)
2 pcs.	Adjustable tie rod 6" (619060)
2 pcs.	Adjustable tie rod 4-1/2" (619061)
1 pc.	Tie rod 3" (619062)
1 pc.	Tie rod 2-1/4" (619063)
1 pc.	Tie rod 1-1/2" (619064)
1 pc.	Tie rod 3/4" (619065)
2 pcs.	Stud (619056)
2 pcs.	Knurled head screw (619066)

Inch	
Order No. 516-612	Included in set
2 pcs.	Half round jaw .125" (619050)
2 pcs.	Half round jaw .25" (619051)
2 pcs.	Plain jaw (619052)
1 pc.	Center point (619053)
1 pc.	Scriber point (619054)
1 pc.	Block base (619055)
2 pcs.	Flat head screw 1-1/4" (619057)
2 pcs.	Flat head screw 5/8" (619058)
2 pcs.	Slotted head nut (619059)
2 pcs.	Adjustable tie rod 6" (619060)
2 pcs.	Adjustable tie rod 4-1/2" (619061)
1 pc.	Tie rod 3" (619062)
1 pc.	Tie rod 2-1/4" (619063)
1 pc.	Tie rod 1-1/2" (619064)
1 pc.	Tie rod 3/4" (619065)
2 pcs.	Stud (619056)
2 pcs.	Knurled head screw (619066)




Half round jaw:
Used to measure an inside or outside diameter.




Order No.	R	L	W	H
619070	1.95mm	2mm	33.6mm	5.3mm
619071	4.95mm	5mm	39.9mm	10.3mm
619050	.123"	.125"	33.6mm	5.3mm
619051	.248"	.25"	39.9mm	10.3mm


Plain jaw: **619072** (10mm), **619052** (.5")
Used to measure an inside or outside diameter.




Center point: **619073** (2mm), **619053** (.1")
Used to scribe a workpiece.




Scriber point: **619054**
Used to scribe a workpiece.

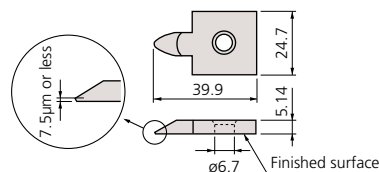


Base: **619074** (10mm), **619055** (.5")
Used as clamps by inserting them into the center hole of a square gage block.



Stud: **619056**




Flat head screw

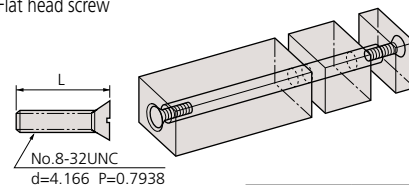


Order No.	L
619057	31.6mm
619058	15.8mm


Slotted head nut: **619059**



Knurled head screw: **619066**




Tie rod

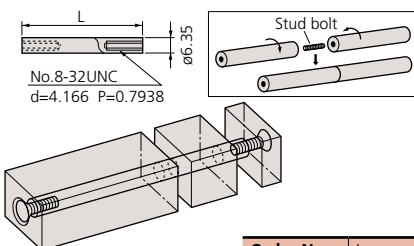

Order No.	L
619065	19mm
619064	38mm
619063	57mm
619062	76mm

Adjustable tie rod

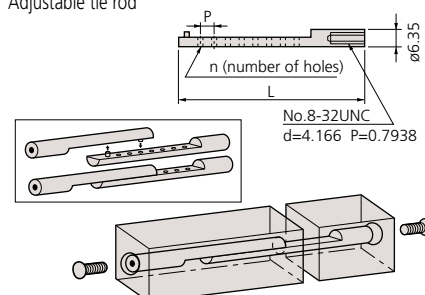

Order No.	L	P	n
619060	124.5mm	6.35mm	14
619061	86.5mm	6.35mm	8

Ceraston

Accessory for Gage Blocks

FEATURES

- Alumina-ceramic grinding stone for removing burrs from hard materials such as ceramics that ordinary grinding stones cannot handle.
- Can be used both for steel gage blocks and CERA Blocks.



SPECIFICATIONS

Order No.	Dimensions (W x D x H)	Mass
601645	100 x 25 x 12mm	110g
601644	150 x 50 x 20mm	530g

Maintenance Kit for Gage Block

SERIES 516

FEATURES

- Includes all necessary maintenance tools for daily care and storage of gage blocks.
- Supplied in a fitted wooden case for portable use.



516-650E


SPECIFICATIONS

Order No.	Assortment of tools and accessories
516-650E	Ceraston (601645): Used for removing burrs on the measuring surface Optical flat (600003): Used for checking whether burrs exist. Tweezers (600004): Used for handling thin gage blocks. Blower brush (600005): Used for blowing out dust on the measuring surface. Cleaning paper (600006): Used for wiping off rust preventive oil and contamination. Artificial leather mat (600007): Used as a gage block mat. Reagent bottle (600008): Bottle of wiping solution (100mL) Gloves



Removing burrs

- (1) Wipe any dust and oil films from the gage block and the Ceraston (or Arkansas stone) using a solvent.
- (2) Place the gage block on the Ceraston so that the measuring face that has burrs is on the abrasive surface of the stone. While applying light pressure, move the gage block to and fro about ten times (Fig. 1). Use a block rubber for thin gage blocks to apply even pressure (Fig. 2).
- (3) Check the measuring face for burrs with an optical flat. If the burrs have not been removed, repeat step (2). If burrs are too large, they may not be removed with a grinding stone. If so, discard the gage block.

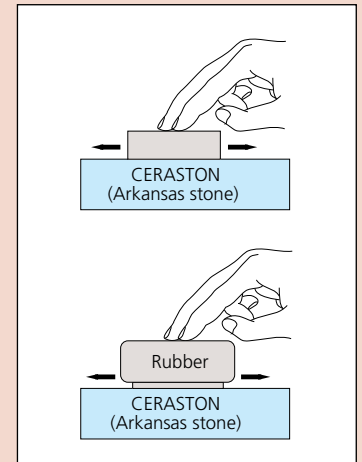

Note: The abrasive surface of a Ceraston must be made flat by lapping it from time to time. After lapping the Ceraston, the lapping powder must be completely removed from the surface to prevent the surface of the gage block from being scratched. Mitutoyo does not handle the Arkansas stone.



Step Master


SERIES 516

FEATURES

Step master is a master gage used for the z-axis (vertical direction) calibration of optical instruments.

- Each adjacent step is measured down to 0.01μm by using an interferometer within ±0.20μm allowance.
- Steel and ceramic types are available.

Dimension

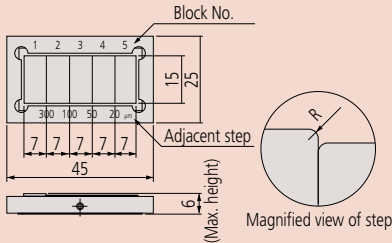

516-498
Ceramic type



516-199
Steel type



SPECIFICATIONS

Metric

Order No.	Step value between adjacent blocks				Remarks
	No. 1 - No. 2	No. 2 - No. 3	No. 3 - No. 4	No. 4 - No. 5	
516-198	10μm	5μm	2μm	1μm	Steel type
516-199	300μm	100μm	50μm	20μm	Steel type
516-498	10μm	5μm	2μm	1μm	Ceramic type
516-499	300μm	100μm	50μm	20μm	Ceramic type

Made-to-order Block & Reference


Available Dimension

Nominal size: .004 to 20" / 0.1 to 1000mm (steel)
.1 to 20" / 0.5 to 500mm (ceramic)
Nominal pitch: 0.0005mm (up to 100mm)
0.001mm (over 100mm)
Minimum section dimension:
Approx. .24 x .24" / 6 x 6mm
Maximum section dimension:
Approx. 5.5 x 5.5" / 140 x 140mm (steel)
Approx. 6.3" Dia. / ø160mm (steel, cylindrical)
Approx. 3.94 x 1.97" / 100 x 50mm (ceramic)
Approx. .24" Dia. / ø60mm (ceramic, cylindrical)
Accuracy: Gage Block Grade level


Special materials of low expansion glass and low expansion ceramic are available.

FEATURES

- Mitutoyo can provide Gage Blocks and reference gages to you size and design.

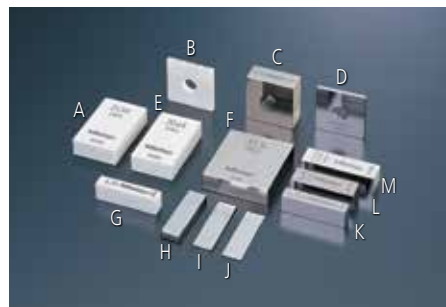

- A: Ceramic rectangular gage block (21.94mm)
- B: Ceramic square gage block (2.1005mm)
- C: Steel square gage block (10.72mm)
- D: Steel square gage block (2.2065mm)
- E: Ceramic rectangular gage block (20.64mm)
- F: Steel rectangular gage block (31.5mm)
- G: Ceramic rectangular gage block (6.34mm)
- H: Steel rectangular gage block (3.603mm)
- I: Steel rectangular gage block (1.1505mm)
- J: Steel rectangular gage block (0.555mm)
- K: Steel rectangular gage block (6.156mm)
- L: Steel rectangular gage block (9.694mm)
- M: Steel rectangular gage block (10.02mm)

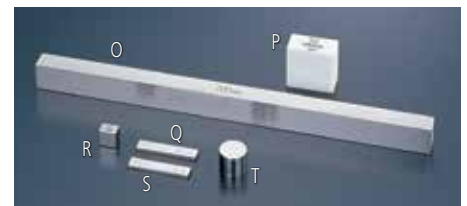

- O: Steel Long rectangular block (15 x 10 x 200mm)
- P: Ceramic square block (24.1 x 24.1 x 12.3mm)
- Q: Steel thin rectangular block (30 x 6 x 1.9mm)
- R: Steel square block (9 x 9 x 6mm)
- S: Steel thin rectangular block (30 x 6 x 2.1mm)
- T: Steel cylindrical block (ø13.08 x 12mm)



- U: Cylindrical reference block for depth micrometer (ø60 x 150mm)
- V: Ceramic reference plate (50 x 50 x 50mm, flatness 0.3μm)
- W: Ceramic stepped block (30 x 18 x 5mm, step: 0.15mm)

Gage Block Comparator GBCD-250

SERIES 565 — Manual Type Comparator with Dual Gage Heads

FEATURES

- Gage blocks between 0.1mm and 250mm can be easily compared with the standard gage block on the GBCD-250.
- The differential dual gaging heads assure the operator of a high-accuracy measurement with ease of use.

SPECIFICATIONS

Inch/Metric	
Model No.	GBCD-250
Order No.	565-150A
Range	0.1mm - 250mm / .004 - 10"
Resolution	0.00001mm (0.01μm) / .000001"
Accuracy in narrow range (20°C)	$\pm(0.03+0.3L/1000)\mu\text{m}^*$ L = Gage block length (mm)
Measuring units	Laser Hologage (upper), Mu-checker (lower)
Operating condition	Temperature: 20°C $\pm 1^\circ\text{C}$ Humidity: 58%RH $\pm 15\%$ RH
Data output	Via SPC output port
Dimensions (W x D x H)	Main unit: 455 x 318 x 691mm Display unit: 345 x 397 x 187mm
Mass	Main unit: Approx. 50kg Display unit: Approx. 9kg

* 95% confidence interval (not including the calibration error of the standard gage block).



Optional Accessories

- 962723: Gage head calibration kit
 02ASD130: Square gage block holder kit
 02ASF040: Heat protection shield
 02ASQ953: GBPAK-M (Included Software)
 937179T: Foot Switch
 936937: Connecting cable

Gage Block Comparator GBCD-100A

SERIES 565 — Automatic Type Comparator with Dual Gage Heads

SPECIFICATIONS

Model No.	GBCD-100A
Order No.	565-160A
Resolution	0.00001mm (0.01μm) / .000001"
Range	0.5mm - 100mm / .02 - 4"
Measuring unit	Differential (dual-head) type Mu-Checker
Accuracy in narrow range (20°C)	$\pm(0.03+0.3L/1000)\mu\text{m}^*$ L = Gage block length (mm)
Measuring force	Upper gage head: 1N (100gf) Lower gage head: 0.6N (60gf)
Air requirement	400kPa (4kgf/cm ²)
Operating condition	Temperature: 20°C $\pm 1^\circ\text{C}$ Humidity: 58%RH $\pm 15\%$ RH
Dimensions (W x D x H)	Main unit: 710 x 366 x 783mm Electronic unit: 160 x 410 x 382mm
Mass	Main unit: 120kg Electronic unit: 14kg

* 95% confidence interval (not including the calibration error of the standard gage block).



The GBCD-100A Automatic Gage Block Comparator is an easy-to-operate dual-head type gage block inspecting system. It automatically compares workpieces with a standard gage block and determines accuracies of such as central length, maximum length, minimum length, and parallelism through the operation of an optional personal computer.

Standard Accessories

GBPAK-A (software)

Optional Accessories

- 962723: Gage block set for probe calibration
 962764: Gage block holder for probe calibration
 613615-03: 5mm gage block (grade 1) for origin setting
 218-007: Work bench
 PC System



Technical Data

Graduation: .00001" or 0.001mm
 Counter resolution: .001" or 0.01mm
 Character Height: .16" / 4mm
 Micrometer Head
 Travel stroke: 1" or 20mm
 Pitch: .025"/rev or 0.5mm/rev
 Hysteresis: .00004" or 1µm
 Provided with inspection certificate.


Standard Accessories

Reference Block: 11mm for 515-322
 Reference Block: .3" for 515-310, 515-311

Optional Accessories

515-112: Auxiliary block kit for bore gage (mm)
 515-119: Auxiliary block kit for bore gage (for 515-310)
 515-121: Auxiliary block kit for bore gage (for 515-311)
 ———: Riser block

Reading



Height A

1. Scale	280.	mm
2. Counter	5.67	mm
3. Thimble	0.000	mm
		285.670 mm



Height Master

SERIES 515

FEATURES


- Models with staggered arrangement of block stack have two measuring faces on the same level, one facing up and the other down (except for 515-310).
- Each Height Master is supplied with a gage block for zero-setting.
- Supplied in fitted wooden case.




515-322




515-310



Staggered 20mm blocks (movable)



Vertical orientation



Riser block

SPECIFICATIONS

Metric

Range (H)	Order No.	Block step	Graduation	Block Pitch Accuracy	Parallelism of Block	Micrometer Head Accuracy	Mass (kg)
5 < H ≤ 310mm	515-322	20mm (staggered)	0.001mm	±1.5µm	1µm	±1µm	23

Inch

Range (H)	Order No.	Block step	Graduation	Block Pitch Accuracy	Parallelism of Block	Micrometer Head Accuracy	Mass (kg)
.2" < H ≤ 12.2"	515-310	.5" (straight)	.00001"	±.00005"	.00004"	±.00005"	23
.2" < H ≤ 12.2"	515-311	1" (staggered)	.00001"	±.00005"	.00004"	±.00005"	23

Digital Height Master


SERIES 515

FEATURES


- Standard model with a digital display, featuring all essential specifications required for versatile height standard.
- With SPC output.
- Each Height Master is supplied with a gage block for zero setting.




515-374



Staggered 20mm blocks (movable)



Vertical orientation



Riser block



Technical Data

Resolution (LCD): .0001" or 0.001mm
 Graduation: .0001" or 0.002mm
 Character Height .21" / 5.4mm

Micrometer Head

Travel Stroke: 1" or 20mm
 Pitch: .025"/rev or 0.5mm/rev
 Hysteresis: .0001" For all inch models
 0.002mm for 300mm models
 0.0025mm for 450 & 600mm models
 Battery: SR44 (2 pcs.), **938882**
 Battery life: Approx. 1.8 years under normal use

Function

Zero-setting, Presetting, ABS/INC switching, Data hold, Data output, inch/mm conversion (on inch/metric models only)
 Alarm: Low voltage, Counting value composition error

Standard Accessories

Reference Block: 11mm for Metric Height Master **611621-031**
 Reference Block: .6" for for Inch Height Master **611196-531**
 Provided with inspection certificate.

Optional Accessories

515-111: Auxiliary block kit for bore gage (mm)
515-120: Auxiliary block kit for bore gage (inch)
 —: Riser block (see page E-27.)
959149: SPC cable (40" / 1m)
959150: SPC cable (80" / 2m)
050019: Fitted Mahogany case for 12" / 300mm model
050059: Fitted Mahogany case for 18" / 450mm model
 24" / 600mm model

SPECIFICATIONS

Metric

Range (H)	Order No.	Block step	Resolution	Block Pitch Accuracy	Parallelism	Micrometer Head Accuracy	Mass (kg)
10 < H ≤ 310mm	515-374	20mm (staggered)	0.001mm	±1.5μm	2μm	±2μm	9.5
10 < H ≤ 460mm	515-376	20mm (staggered)	0.001mm	±2.5μm	2.5μm	±2μm	13.6
10 < H ≤ 610mm	515-378	20mm (staggered)	0.001mm	±3.5μm	2.5μm	±2.5μm	16.0

Inch/Metric

Range (H)	Order No.	Block step	Resolution	Block Pitch Accuracy	Parallelism	Micrometer Head Accuracy	Mass (kg)
.5" < H ≤ 12"	515-375	1" (staggered)	.0001" / 0.001mm	±.0001"	.00005"	±.0001"	9.5
.5" < H ≤ 18"	515-377	1" (staggered)	.0001" / 0.001mm	±.0001"	.0001"	±.0001"	13.6
.5" < H ≤ 24"	515-379	1" (staggered)	.0001" / 0.001mm	±.0001"	.0001"	±.0001"	16.0

Riser Blocks

SERIES 515

FEATURES

- These riser blocks are specially designed for standard/Digimatic height masters.



SPECIFICATIONS

Metric			
Height	Order No.	Accuracy of height	Mass (kg)
150mm	515-113	$\pm 0.6\mu\text{m}$	5.7
300mm	515-114	$\pm 1.0\mu\text{m}$	11.3
600mm	515-115	$\pm 2.0\mu\text{m}$	31

Inch			
Height	Order No.	Accuracy of height	Mass (kg)
6"	515-116	$\pm 20\mu\text{in}$	5.7
12"	515-117	$\pm 40\mu\text{in}$	11.3
24"	515-118	$\pm 80\mu\text{in}$	31

Auxiliary Block Kit

SERIES 515 — for Bore Gage

FEATURES

- Used for efficient zero-setting of dial bore gages and tubular inside micrometers (18 - 150mm) on a Height Master.



Bore gage zero-setting



SPECIFICATIONS

Metric	
Order No.	Applicable height master
515-110	Universal Height Master
515-111	Digimatic Height Master
515-112	Height Master


Inch	
Order No.	Applicable height master
515-119	Universal Height Master, Height Master (515-310)
515-120	Digimatic Height Master
515-121	Height Master (515-311)

Universal Height Master


SERIES 515 — Usable in Vertical and Horizontal Orientations

FEATURES


- The Universal Height Master is designed for both vertical and horizontal orientations, providing a wide range of applications such as accuracy checking of machine tool table movements.
- Fitted wooden case supplied.




Single-row 10mm blocks (movable)



Vertical orientation



Horizontal orientation



Riser block

515-520

SPECIFICATIONS

Metric

Range (R)	Order No.	Block step	Graduation	Block Pitch Accuracy	Parallelism of Block	Micrometer Head Accuracy	Mass (kg)
$5 < R \leq 610\text{mm}$	515-520	10mm (straight)	0.001mm	$\pm 1.5\mu\text{m}$	$1.0\mu\text{m}$	$\pm 1.2\mu\text{m}$	42
$5 < R \leq 1010\text{mm}$	515-523	10mm (straight)	0.001mm	$\pm 3.5\mu\text{m}$	$2.5\mu\text{m}$	$\pm 1.5\mu\text{m}$	63.5

Inch

Range (R)	Order No.	Block step	Graduation	Block Pitch Accuracy	Parallelism of Block	Micrometer Head Accuracy	Mass (kg)
$.2" < R \leq 18.2"$	515-512	.5" (straight)	.00001"	$\pm .00005"$	.00006"	$\pm .00004"$	42
$.2" < R \leq 24.2"$	515-510	.5" (straight)	.00001"	$\pm .0001"$	.00006"	$\pm .00004"$	50
$.2" < R \leq 40.2"$	515-513	.5" (straight)	.00001"	$\pm .00015"$	.00008"	$\pm .00006"$	63.5



Technical Data

Graduation: 0.001mm or .00001"
 Counter Resolution: .001" or 0.01mm
 Character Height: .16" / 4mm
 Block arrangement: Straight arrangement

Micrometer Head

Travel stroke: 1" or 20mm
 Pitch: .025"/rev or 0.5mm/rev
 Hysteresis: .00004" / 1.2μm up to 24.2" / 610mm
 .00006" / 1.5μm for 40.2" / 1010mm

Block pitch accuracy: $\pm 1.5\mu\text{m}$ ($0 < R \leq 310\text{mm}$)
 $\pm 2.5\mu\text{m}$ ($310 < R \leq 610\text{mm}$)
 $\pm 3.5\mu\text{m}$ ($610 < R \leq 1010\text{mm}$)

Parallelism of blocks: $1.0\mu\text{m}$ ($0 < R \leq 310\text{mm}$)
 $2.5\mu\text{m}$ ($310 < R \leq 1010\text{mm}$)

Provided with inspection certificate.

Optional Accessories

- 900574***: Supporting base for vertical operation
 Mass: 3kg
 (*supplied as a standard for **515-523** and **515-513**)
- 515-112**: Auxiliary block kit for bore gage (mm)
515-119: Auxiliary block kit for bore gage (inch)



Using in horizontal orientation



Supporting base



Technical Data

Measuring range (R): Refer to the list of specifications.
 Block pitch accuracy:
 $\pm 1.2\mu\text{m}$ ($0 < R \leq 310\text{mm}$)
 $\pm 1.8\mu\text{m}$ ($310 < R \leq 610\text{mm}$)
 $\pm 2.5\mu\text{m}$ ($610 < R \leq 1010\text{mm}$)
 $\pm 4.0\mu\text{m}$ ($1010 < R \leq 1510\text{mm}$)
 Parallelism of blocks:
 $1.0\mu\text{m}$ ($0 < R \leq 450\text{mm}$)
 $1.5\mu\text{m}$ ($450 < R \leq 1010\text{mm}$)
 $2.0\mu\text{m}$ ($1010 < R \leq 1510\text{mm}$)
 Provided with inspection certificate.

High Accuracy Check Master HMC-H


SERIES 515

FEATURES

- Designed to check the accuracy of table movements of machine tools and calibrate CMMs. Permanently wrung stack of gage blocks is housed in a rigid frame.
- Can be used in either vertical and horizontal orientation.
- Fitted wooden case supplied.

Specifications for Ceramic Check Master:

- Each measuring block is made of zirconia-based ceramic that requires no anti-corrosion treatment for measuring faces.
- Free from deterioration and dimensional changes over time.



Single-row
10mm (.5") blocks

Vertical
orientation

Horizontal
orientation



515-743

515-742

515-740

SPECIFICATIONS

Metric

Range (R)	Order No.		Pitch		Accuracy of block pitch for the range shown below as measured from the bottom block				Length	Parallelism	Mass (kg)
	Steel	Ceramic	P	P	up to 300mm	300-600mm	600-1000mm	1000-1500mm			
300mm	515-740	515-760	20mm	10mm	$\pm 1.2\mu\text{m}$	—	—	—	331mm	$1\mu\text{m}$	3.6
450mm	515-741	515-761	20mm	10mm	$\pm 1.2\mu\text{m}$	$\pm 1.8\mu\text{m}$	—	—	482mm	$1\mu\text{m}$	5.4
600mm	515-742	515-762	20mm	10mm	$\pm 1.2\mu\text{m}$	$\pm 1.8\mu\text{m}$	—	—	631mm	$1.5\mu\text{m}$	7.2
1000mm	515-743	515-763	20mm	10mm	$\pm 1.2\mu\text{m}$	$\pm 1.8\mu\text{m}$	$\pm 2.5\mu\text{m}$	—	1037mm	$1.5\mu\text{m}$	12.0
1500mm	515-744	515-764	20mm	10mm	$\pm 1.2\mu\text{m}$	$\pm 1.8\mu\text{m}$	$\pm 2.5\mu\text{m}$	$\pm 4.0\mu\text{m}$	1546mm	$2\mu\text{m}$	18.0

Inch

Range (R)	Order No.		Pitch		Accuracy of block pitch for the range shown below as measured from the bottom block				Length	Parallelism	Mass (kg)
	Steel	Ceramic	P	P	up to 12"	12-24"	24-40"	40-60"			
12"	515-730	515-750	1"	.5"	$\pm 50\mu\text{in}$	—	—	—	13.0"	$40\mu\text{in}$	3.4
18"	515-731	515-751	1"	.5"	$\pm 50\mu\text{in}$	$\pm 70\mu\text{in}$	—	—	19.0"	$40\mu\text{in}$	5.2
24"	515-732	515-752	1"	.5"	$\pm 50\mu\text{in}$	$\pm 70\mu\text{in}$	—	—	25.0"	$60\mu\text{in}$	6.9
40"	515-733	515-753	1"	.5"	$\pm 50\mu\text{in}$	$\pm 70\mu\text{in}$	$\pm 100\mu\text{in}$	—	41.0"	$60\mu\text{in}$	11.5
60"	515-734	515-754	1"	.5"	$\pm 50\mu\text{in}$	$\pm 70\mu\text{in}$	$\pm 100\mu\text{in}$	$\pm 158\mu\text{in}$	61.5"	$80\mu\text{in}$	17.3


Optional Accessories

601167: Supporting base for vertical operation
 (*supplied as a standard for 515-523 and 515-513)

Dimensions: 14.2"(W) x 8.7"(D) x 8.3"(H)
 360mm(W) x 220mm(D) x 210mm(H)
 Mass: 3kg



Supporting base

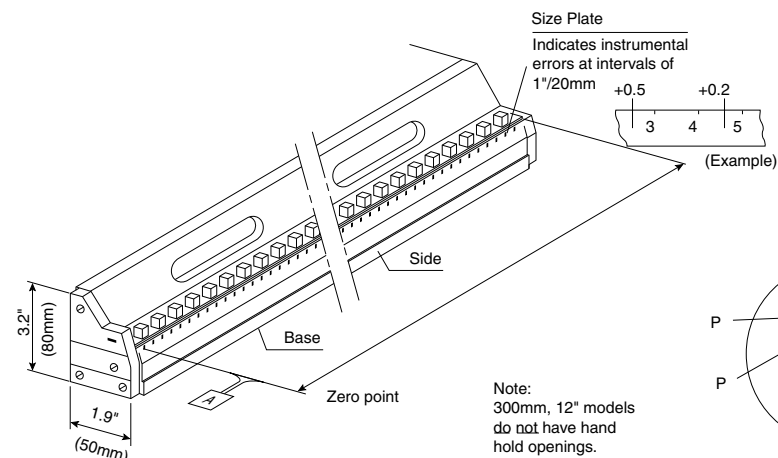

CERA Straight Master SM-C

SERIES 311 — Straightness Measuring Instrument

FEATURES

CERA Straight master is a master gage used for the straightness inspection of each axis movement such as a CMM, machine tool, semiconductor related equipment and form measuring machine.

- Made from Alumina ceramic
- 50mm/2" pitch gradation scales
- Precision lapped measuring surface
- Double faced type is lapping the double face which can be used for straightness in horizontal and vertical as a reference square.
- Lightweight
- Supplied with fitted wooden case.



SPECIFICATIONS

Metric		Inch		High accuracy model		
Nominal length	Order No.*	Nominal length	Order No.*	Straightness	Size (L x H x W)	Mass
400mm	311-302-33	16"	311-322-33	0.3μm	440 x 35 x 50mm	1.8kg
700mm	311-305-33	28"	311-325-33	0.5μm	740 x 35 x 50mm	3kg
1000mm	311-307-33	40"	311-327-33	1.0μm	1040 x 45 x 80mm	8kg
1300mm	311-309-33	52"	311-329-33	1.5μm	1340 x 45 x 80mm	10kg

Metric		Inch		Ultra high accuracy model		
Nominal length	Order No.*	Nominal length	Order No.*	Straightness	Size (L x H x W)	Mass
400mm	311-332-33	16"	311-342-33	0.2μm	440 x 35 x 50mm	1.8kg
700mm	311-335-33	28"	311-345-33	0.4μm	740 x 35 x 50mm	3kg
1000mm	311-337-33	40"	311-347-33	0.5μm	1040 x 45 x 80mm	8kg
1300mm	311-339-33	52"	311-349-33	0.7μm	1340 x 45 x 80mm	10kg

Double faced type



SPECIFICATIONS


Metric		Inch		Double faced model		
Nominal length	Order No.*	Nominal length	Order No.*	Straightness	Size (L x H x W)	Mass
400mm	311-352-33	16"	311-362-33	0.3μm	440 x 45 x 80mm	3.2kg
700mm	311-355-33	28"	311-365-33	0.5μm	740 x 45 x 80mm	5.5kg
1000mm	311-357-33	40"	311-367-33	1.0μm	1040 x 45 x 80mm	8kg
1300mm	311-359-33	52"	311-369-33	1.5μm	1340 x 45 x 80mm	10kg




Technical Data

Provided with inspection certificate.

Cross section



Double faced type



Square Master

SERIES 311 — Squareness / Straightness Measuring Instrument

Technical Data

Squareness: Refer to the list of specifications
 Straightness: Refer to the list of specifications
 Dial test indicator provided
 Range: 0.2mm
 Graduation: 0.002mm
 Accuracy: 3μm


Optional Accessory

—: Riser blocks (see page E-27.)*
517-665: Granite square, 45 (W) x 140 (D) x 280 (H) mm
900571: Adjustable holder
900551: Extension holder
900565: Feeler**

*Not available for 450mm model.
 Adapter (902803**) is required for metric model.


Adjustable holder

No.900571




Extension holder

No.900551



Feeler

No.900565



FEATURES

- Squareness (perpendicularity) and straightness measurements can be performed accurately and efficiently by moving a lever.
- With a dial test indicator for reading displacements.
- Its own squareness is adjustable for high accuracy measurement.



311-215




311-225



311-245

SPECIFICATIONS

Metric				
Vertical travel	Order No.	Squareness	Straightness	Mass (kg)
150mm	311-215	3μm	2μm	13.7
250mm	311-225	6μm	2.5μm	16.2
450mm	311-245	9μm	3.5μm	24

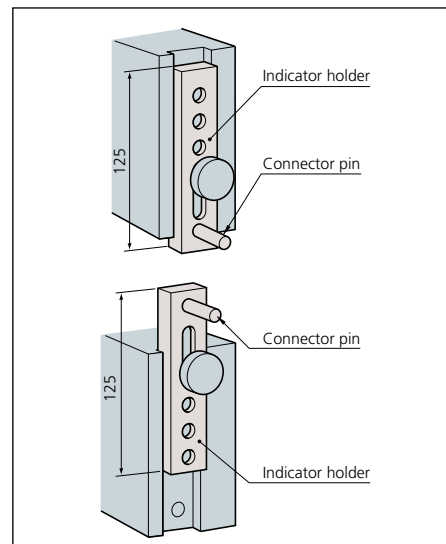

Standard Scales

SERIES 182 — Made of Low Expansion Glass

FEATURES


- High precision glass scales manufactured under Mitutoyo's leading-edge Linear Scale production technology.
- High accuracy is guaranteed to be used as a standard for calibrating graduated scales.



182-502-50

182-501-50

DIMENSIONS

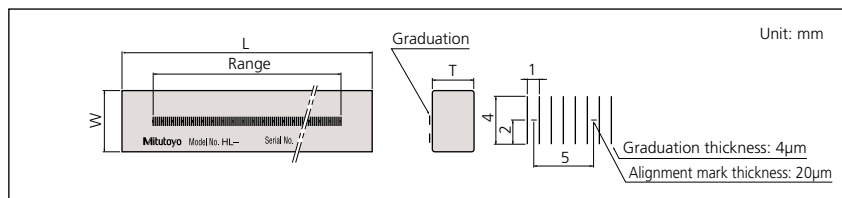


Working Standard Scales

SERIES 182

FEATURES

- High precision glass scales manufactured under Mitutoyo's leading-edge Linear Scale production technology.
- Ideal for checking magnification accuracy of profile projectors and microscopes, and the table feeding accuracy of measuring equipment.

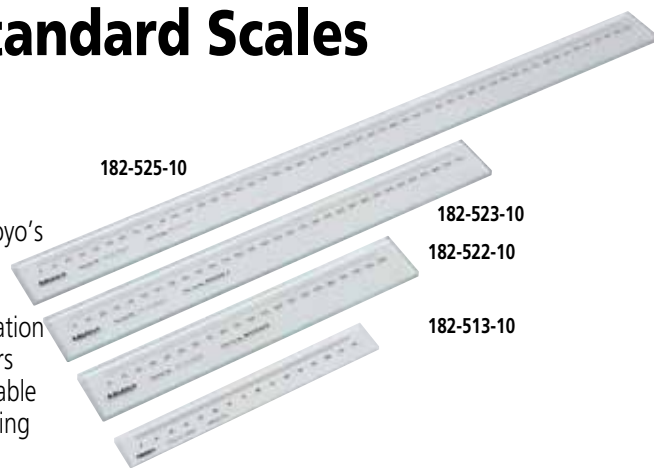


182-525-10

182-523-10

182-522-10

182-513-10

DIMENSIONS

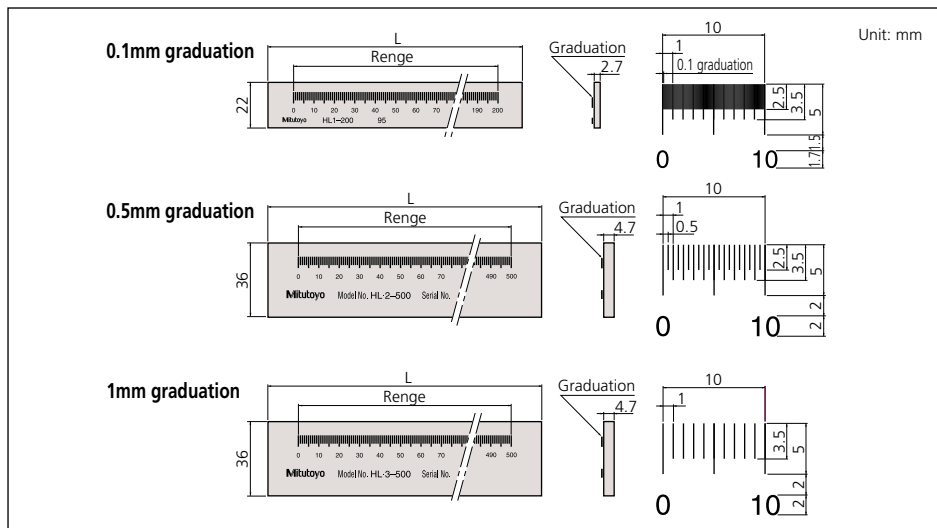

Technical Data

Accuracy (at 20°C): $(0.5+L/1000)\mu\text{m}$,
 $L = \text{Measured length (mm)}$
 Glass material: Low expansion glass
 Thermal expansion coefficient: $8 \times 10^{-6}/\text{K}$
 Graduation: 1mm
 Graduation thickness: 4μm
 Mass: 0.75kg (250mm), 1.8kg (500mm)

SPECIFICATIONS

Metric				
Range	Order No.	L	W	T
250mm	182-501-50	280mm	20mm	10mm
250mm	182-501-60*	280mm	20mm	10mm
500mm	182-502-50	530mm	30mm	20mm
500mm	182-502-60*	530mm	30mm	20mm

*with English JCSS certificate.



Technical Data

Accuracy (at 20°C): $(1.5+2L/1000)\mu\text{m}$,
 $L = \text{Measured length (mm)}$
 Glass material: Sodium glass
 Thermal expansion coefficient: $8.5 \times 10^{-6}/\text{K}$
 Graduation: 0.1mm (thickness: 20μm)
 0.5mm (thickness: 50μm)
 1mm (thickness: 100μm)

SPECIFICATIONS

Metric				
Range	Order No.	Graduation	L	Mass
50mm	182-511-10	0.1mm	75mm	0.23kg
100mm	182-512-10	0.1mm	125mm	0.24kg
150mm	182-513-10	0.1mm	175mm	0.35kg
200mm	182-514-10	0.1mm	225mm	0.36kg
100mm	182-521-10	0.5mm	130mm	0.27kg
200mm	182-522-10	0.5mm	230mm	0.32kg
300mm	182-523-10	0.5mm	330mm	0.57kg
400mm	182-524-10	0.5mm	430mm	0.71kg
500mm	182-525-10	0.5mm	530mm	0.86kg
250mm	182-531-10	1mm	280mm	0.55kg
500mm	182-532-10	1mm	530mm	0.86kg
750mm	182-533-10	1mm	780mm	1.22kg
1000mm	182-534-10	1mm	1030mm	1.54kg

High Precision Square

SERIES 311

FEATURES

The High Precision Square is a gage used for inspecting the travel straightness and axial perpendicularity of moving elements on equipment such as machine tools, CMMs, form measuring machines and semiconductor related equipment.

- Four precision-lapped reference surfaces.
- Better than 1 μ m/300mm straightness and perpendicularity.



311-111



311-112



311-113

SPECIFICATIONS

Metric

Order No.	Dimension (W x L x T)	Mass
311-111	90 x 110 x 25mm	1.5kg
311-112	160 x 210 x 25mm	5.0kg
311-113	260 x 310 x 30mm	14.0kg

* 311-113 is supplied with a removable handle.

Spring Dividers and Calipers

SERIES 950

FEATURES

- Spring Divider — Fully hardened and tempered joints, spring, washers and divider points.
- Outside Spring Caliper — Contact ends fully rounded to give accurate dimensions.
- Inside Spring Caliper — Ends fully rounded to give accurate contact with a workpiece.



Spring divider



Outside spring calipers



Inside spring calipers

SPECIFICATIONS


Range	Order No.		
	Spring divider	Outside spring calipers	Inside spring calipers
6" (150mm)	950-212	950-222	950-232
8" (200mm)	950-213	950-223	950-233

Combination Square Set

SERIES 180

FEATURES

- Measuring head are attached to the graduated steel rule (blade), allowing versatile measurements on various types of workpieces
- The measuring head come hardened or cast iron-not-hardened
- Economy sets not including a protractor head are also available

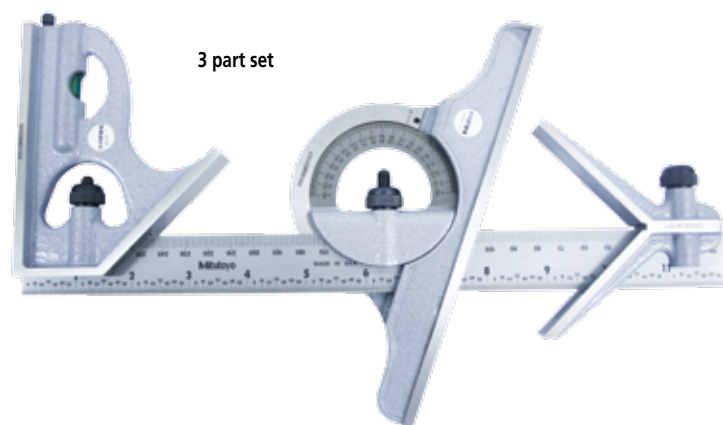

SPECIFICATIONS

Head Only ☐ Hardened

Order No.	Description
180-102B	Square Head for 12"/300mm to 24"/600mm
180-202B	Center Head for 12"/300mm to 24"/600mm

Head Only ☐ Cast iron-not hardened

Order No.	Description
180-112B	Square Head for 12"/300mm to 24"/600mm
180-212B	Center Head for 12"/300mm to 24"/600mm
180-301B	Protractor Head for 12"/300mm to 24"/600mm

Inch/Metric ☐ Hardened Combination Square Sets

Set No.	Blade Size	Type	Square Head	Center Head	Protractor Head
180-903B	12"	4R	180-501B	180-102B	180-202B
180-905B	12"	4R	180-501B	180-102B	180-202B
180-906B	12"	16R	180-502B	180-102B	180-202B
180-907B	12"/300mm	E/M	180-503B	180-102B	180-202B
180-910B	300mm	Metric	180-505B	180-102B	180-202B

*Cast iron-not hardened

Inch/Metric ☐ Cast iron-not hardened Combination Square Sets

Set No.	Blade Size	Type	Square Head	Center Head	Protractor Head
180-803B	12"	4R	180-501B	180-112B	180-212B
180-805B	12"	4R	180-501B	180-112B	180-212B

Inch / Metric ☐ Blades only

Order No.	Length	Graduations	Accuracy (length)
180-501B	12"	8, 16, 32, 64ths (4R)	+ .005" / - .0035" (+0.13mm / -0.09mm)
180-502B	12"	32, 64, 50, 100ths (16R)	
180-503B	12" x 300mm	32, 64ths, 1, 0.5mm	
180-505B	300mm	1, .5, 1, 0.5mm	+ .006" / - .0035" (+0.15mm / -0.09mm)
180-701B	18"	8, 16, 32, 64ths (4R)	
180-703B	18" x 450mm	32, 64ths, 1, 0.5mm	
180-601B	24"	8, 16, 32, 64ths (4R)	+ .007" / - .0035" (+0.18mm / -0.09mm)
180-603B	24" x 600mm	32, 64ths, 1, 0.5mm	

Technical Data

- Square head: Used to set the rule at 90 degrees or 45 degrees to an edge of a workpiece.
- Center head: Used to locate centers of round workpieces
- Protractor head: Used to set the rule at a desired angle to an edge of a workpiece. Also used for measuring angles.

Steel Rules

SERIES 182

FEATURES

- Clear graduations on satin-chrome finish.
- Stainless tempered.



182-125

SPECIFICATIONS

Wide Rigid Rules (thickness 3/64")

Order No.	Size	Graduations				Width	Accuracy (Length)
182-101	6"(4R)	1/8	1/16	1/32	1/64th	3/4"	+.004" / -.0035" (+0.1mm / -0.09mm)
182-102	6"(16R)	1/32	1/64	1/50	1/100th	3/4"	
182-103	6"(5R)	1/32	1/64	1/10	1/100th	3/4"	
182-104	6"(3R)	1/32	1/64	1/10	1/50th	3/4"	
182-105	6" x 150mm	1/32	1/64	1mm	0.5mm	3/4"	
182-106	6" x 150mm	1/50	1/100	1mm	0.5mm	3/4"	
182-107	6" x 150mm	1/10	1/100	1mm	0.5mm	3/4"	
182-108	6" x 150mm	1/10	1/50	1mm	0.5mm	3/4"	
182-111	150mm	1mm	0.5mm	1mm	0.5mm	19mm	+.005 / -.0035" (+0.13mm / -0.09mm)
182-121	12"(4R)	1/8	1/16	1/32	1/64th	1"	
182-122	12"(16R)	1/32	1/64	1/50	1/100th	1"	
182-123	12"(5R)	1/32	1/64	1/10	1/100th	1"	
182-124	12"(3R)	1/32	1/64	1/10	1/50th	1"	
182-125	12" x 300mm	1/32	1/64	1mm	0.5mm	1"	
182-126	12" x 300mm	1/50	1/100	1mm	0.5mm	1"	
182-131	300mm	1mm	0.5mm	1mm	0.5mm	25mm	
182-241	18"(4R)	1/8	1/16	1/32	1/64	13/16"	+.006" / -.035" (+0.15mm / -0.09mm)
182-142	18"(16R)	1/32	1/64	1/50	1/100th	13/16"	
182-143	18"(5R)	1/32	1/64	1/10	1/100th	13/16"	
182-144	18"(3R)	1/32	1/64	1/10	1/50th	13/16"	
182-145	18" x 450mm	1/32	1/64	1mm	0.5mm	13/16"	
182-151	450mm	1mm	0.5mm	1mm	0.5mm	30mm	
182-161	24"(4R)	1/8	1/16	1/32	1/64	13/16"	
182-162	24"(16R)	1/32	1/64	1/50	1/100th	13/16"	
182-163	24"(5R)	1/32	1/64	1/10	1/100th	13/16"	+.007" / -.0035" (+0.18mm / -0.09mm)
182-165	24" x 600mm	1/32	1/64	1mm	0.5mm	13/16"	
182-171	600mm	1mm	0.5mm	1mm	0.5mm	30mm	

Steel Rules

SERIES 182

FEATURES


- Clear graduations on satin-chrome finish.
- Stainless tempered.



182-265

SPECIFICATIONS

Full-Flexible Rules (thickness 1/64")



182-223

Order No.	Size	Graduations				Width	Accuracy (Length)
182-201	6"(4R)	1/8	1/16	1/32	1/64th	1/2"	+0.004" / -0.0035" (+0.1mm / -0.09mm)
182-202	6"(16R)	1/32	1/64	1/50	1/100th	1/2"	
182-203	6"(5R)	1/32	1/64	1/10	1/100th	1/2"	
182-204	6"(3R)	1/32	1/64	1/10	1/50th	1/2"	
182-205	6" x 150mm	1/32	1/64	1mm	0.5mm	1/2"	
182-206	6" x 150mm	1/50	1/100	1mm	0.5mm	1/2"	
182-207	6" x 150mm	1/10	1/100	1mm	0.5mm	1/2"	
182-208	6" x 150mm	1/10	1/50	1mm	0.5mm	1/2"	
182-211	150mm	1mm	0.5mm	1mm	0.5mm	12mm	+0.005" / -0.0035" (+0.13mm / -0.09mm)
182-221	12"(4R)	1/8	1/16	1/32	1/64th	1/2"	
182-222	12"(16R)	1/32	1/64	1/50	1/100th	1/2"	
182-223	12"(5R)	1/32	1/64	1/10	1/100th	1/2"	
182-224	12"(3R)	1/32	1/64	1/10	1/50th	1/2"	
182-225	12" x 300mm	1/32	1/64	1mm	0.5mm	1/2"	
182-226	12" x 300mm	1/50	1/100	1mm	0.5mm	1/2"	
182-231	300mm	1mm	0.5mm	1mm	0.5mm	12mm	
182-241	18"(4R)	1/8	1/16	1/32	1/64	3/4"	+0.006" / -0.0035" (+0.15mm / -0.09mm)
182-242	18"(16R)	1/32	1/64	1/50	1/100th	3/4"	
182-243	18"(5R)	1/32	1/64	1/10	1/100th	3/4"	
182-244	18"(3R)	1/32	1/64	1/10	1/50th	3/4"	
182-245	18" x 450mm	1/32	1/64	1mm	0.5mm	3/4"	
182-251	450mm	1mm	0.5mm	1mm	0.5mm	18mm	
182-261	24"(4R)	1/8	1/16	1/32	1/64	3/4"	
182-262	24"(16R)	1/32	1/64	1/50	1/100th	3/4"	
182-263	24"(5R)	1/32	1/64	1/10	1/100th	3/4"	+0.007" / -0.0035" (+0.18mm / -0.09mm)
182-264	24"(3R)	1/32	1/64	1/10	1/50th	3/4"	
182-265	24" x 600mm	1/32	1/64	1mm	0.5mm	3/4"	
182-271	600mm	1mm	0.5mm	1mm	0.5mm	18mm	

Semi-Flexible Rules

SERIES 182

FEATURES

- Engraved on frontside only



182-304

SPECIFICATIONS

Inch/Metric							
Order No.	Size	Graduations				Width	Accuracy (Length)
182-301	4" x 100mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-302	6" x 150mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-303	8" x 200mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-304	10" x 250mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-305	12" x 300mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-307	20" x 500mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"
182-309	40" x 1000mm	1/2mm	1mm	1/32	1/64	1/16th	5/8"

Thickness Gages

SERIES 950, 184

FEATURES

- Each leaf is marked with its thickness.
- Each leaf is detachable if necessary.



184-3035

Technical Data

Accuracy of Leaves Thickness

Nominal Thickness

Metric

0.01mm to less than 0.06mm:

0.06mm to less than 0.10mm:

0.10mm to less than 0.35mm:

0.35mm to less than 0.65mm:

0.65mm to less than 3.0mm:

Inch

.0015 to less than .007":

.007 to less than .015":

.015 to less than .025":

.026 to less than .030":

.031 to less than .040":

.041 to less than .075":

.076 to less than .100":

.101 to less than .200":

.200" and over :

Tolerance

±0.003mm

±0.004mm

±0.005mm

±0.008mm

±0.01mm

±.0002"

±.0003"

±.0004"

±.00045"

±.0005"

±.00055"

±.0006"

±.00065"

±.00075"

SPECIFICATIONS

Inch

Range	Order No.	Type of Blade	Blade Length	Composition of leaves
.002" - .035" (26 leaves)	950-251	Straight 1/2" width	3"	.002 thru .018" by .001" step plus .022, .024, .025, .028, .030, .032, .035"
.0015" - .025" (26 leaves)	950-252	Tapered 1/4" width at tip	3"	.002 thru .025" by .001" step plus .0015, .0025"
.0015" - .200" (15 leaves)	950-254	Straight 1/2" width	3"	.0015, .002, .003, .004, .006, .008, .010, .012, .015, .020, .030, .040, .075, .100, .200"
.0015" - .200" (13 leaves)	950-255	Straight 1/2" width	4.5"	.0015, .002, .003, .004, .006, .008, .010, .020, .030, .040, .075, .100, .200"
.0015" - .015" (8 leaves)	950-256	Straight 1/2" width	6"	.0015, .002, .003, .004, .008, .010, .012, .015"

Metric

Range	Order No.	Type of Blade	Blade Length	Composition of leaves
0.05 - 1mm	184-3135	Straight 13mm width	100mm	28 leaves: 0.05 - 0.15mm by 0.01mm, 0.2 - 1mm by 0.05mm
	184-3035		150mm	28 leaves: 0.05 - 0.15mm by 0.01mm, 0.2 - 1mm by 0.05mm
0.05 - 1mm	184-3045	Straight 13mm width	150mm	20 leaves: 0.05 - 1mm by 0.05mm
0.05 - 1mm	184-3055	Straight 13mm width	100mm	13 leaves: 0.05 - 0.3mm by 0.05mm, 0.4 - 1mm by 0.1mm
	184-3015		150mm	13 leaves: 0.05 - 0.3mm by 0.05mm, 0.4 - 1mm by 0.1mm
0.05 - 0.8mm	184-3065	Straight 13mm width	100mm	10 leaves: 0.05 - 0.2mm by 0.05mm, 0.3 - 0.8mm by 0.1mm
	184-3085		150mm	10 leaves: 0.05 - 0.2mm by 0.05mm, 0.3 - 0.8mm by 0.1mm
0.03 - 0.5mm	184-3075	Straight 13mm width	100mm	13 leaves: 0.03 - 0.1mm by 0.01mm, 0.2 - 0.5mm by 0.1mm, 0.15mm
	184-3025		150mm	13 leaves: 0.03 - 0.1mm by 0.01mm, 0.2 - 0.5mm by 0.1mm, 0.15mm

Wooden Box Part No.


Part No.	Spare
07311	960-703
	960-611
063413	960-611
	960-613

Precision Levels

SERIES 960

FEATURES

- High precision longitudinal and transverse vials make it possible to check or level surfaces.
- Supplied in wooden box.



960-703



960-611

SPECIFICATIONS

Metric

Order No.	Sensitivity	Accuracy	Dimensions (W x D x H)
960-703	0.02mm/m	±0.006mm	200 x 44 x 200mm

Inch

Order No.	Sensitivity	Accuracy	Dimensions		
			W	D	H
960-611	.0012"/12"	±.0006"	7.87"	1.73"	1.50"
960-612	.0006"/12"	±.0003"	7.87"	1.73"	1.50"
960-613	.00024"/12"	±.00017"	7.87"	1.73"	1.50"

Mitutoyo

Digital Universal Protractor

SERIES 187

FEATURES


- Data output function make it easy to see the statistical data.
- Can be attached to height gages, gage holder (950750, metric)
- Setting preset value.
- Removable blade.



SPECIFICATIONS

Code No.	187-552
Model	BP-D300E
Blade	12" (187-103)
Display	LCD - 5 digit, (-) sign, character height 6.5mm
Measuring range	-360° ~ +360°
Resolution	1' (0.01°)
Accuracy	± 2' (±0.03°)
Repeatability	1' (0.01°)
Mass	1.45 lbs (659g)
Dust / Water protection level	IP40
Function	Zero, Direction select, Data output / Data hold, Preset, Switchable Seagesimal or Decimal Natation
Max. response speed	3 rps
Battery	Lithium battery (CR2032) 1 pc. (Part No. 05SAA217)
Battery life	2,000 hours
Alarm	Battery voltage low, Over speed error (Err)
Temperature	Operation temperature: 0 to 40°C Storage temperature: -10 to 60°C

DIMENSIONS

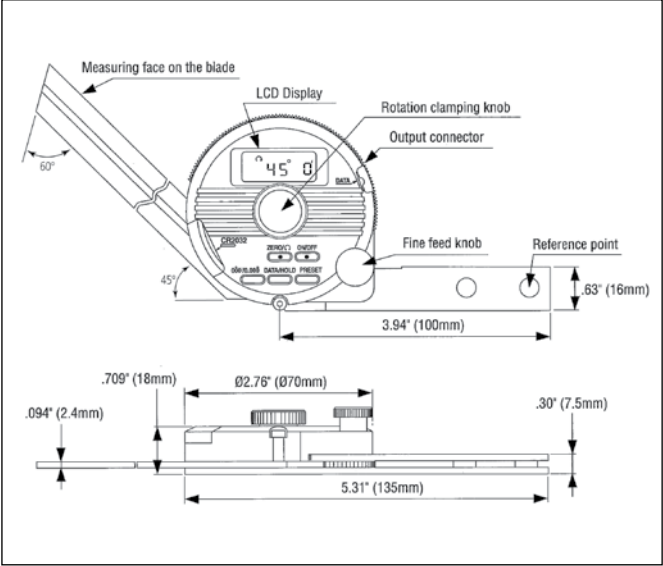

Technical Data

Range:	-360° to +360°
Tolerance:	±2' (±0.03°)
Repeatability:	1'
Resolution:	1' (0.01°)
Battery:	Lithium Battery
Battery life:	2,000 hours

Function


Presetting

Standard Accessories

- 12" Blade (Code No. 187-103)
- Battery (CR2032) (Part No. 05SAA217)
- Clamp box for Inch Height Gage (Part No. 950749)
- Plastic Case

Optional Accessories


- 187-104 6" blade
- 187-105 Acute angle attachment
- 950750 Clamp box for Metric Height Gage
- 905338 Connecting cable (40" / 1m)
- 905409 Connecting cable (80" / 2m)

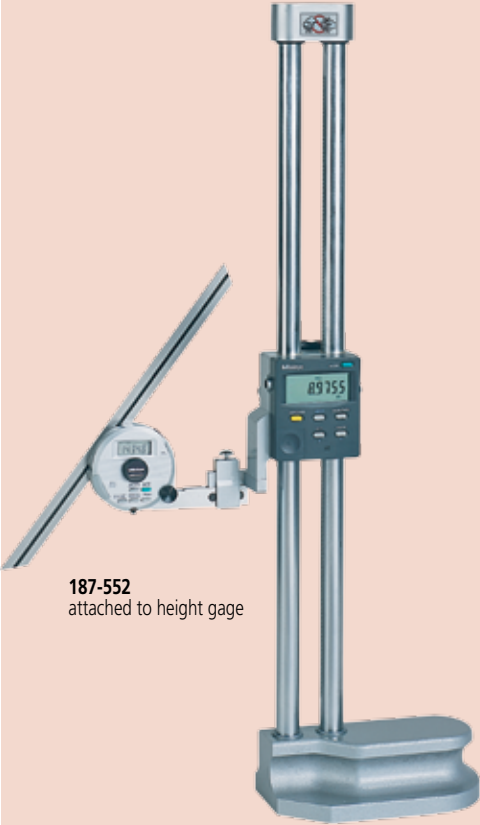

187-552
attached to height gage

Technical Data

Graduation:	5min. (0° - 90° - 0°)
Accuracy	
Vernier	±5'
Straightness	[.00016" + (.00005xL/2)]"
Parallelism	[.00016" + (.00005xL/2)]"
L = Length in inch	
Diameter:	2.56" / 70mm




Universal Bevel Protractor

SERIES 187

FEATURES

- High-precision angle gage for accurate angle measurement of machines, molds, and jigs.
- Can be attached to height gages.

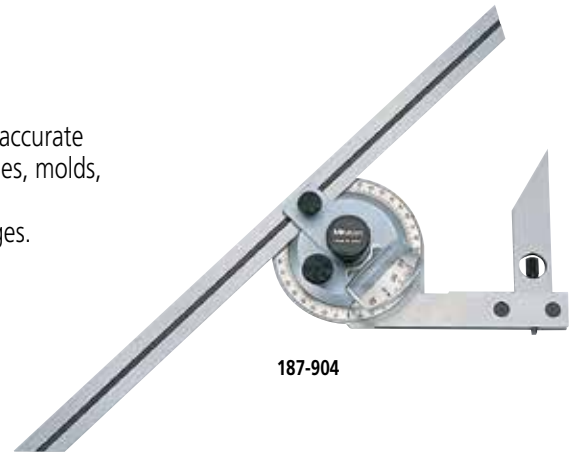

187-904

SPECIFICATIONS


Universal Bevel Protractors

Graduation			
Order No.	Dial	Vernier	Remarks
187-904	1°	5 min	with 6" blade (187-104) and Clamp box for Inch Height Gages (950749)
187-906	1°	5min	with 12" blade (187-103) and Clamp box for Inch Height Gages (950749)

Universal Bevel Protractor Accessories and Parts

Order No.	Remarks
187-103	12" Blade.
187-104	6" Blade.
187-105	Acute angle attachment
950749	Clamp box for Inch Height Gages
950750	Clamp box for Metric Height Gages

DIMENSIONS

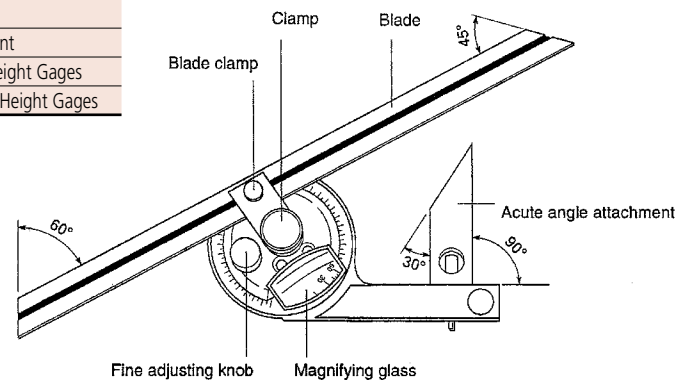

Bevel Protractor


SERIES 187

FEATURES

- Consists of three sheets of stainless steel, the middle one of which is made for angle measurements.

SPECIFICATIONS

Order No.	Graduation	Remarks
187-201	1° / 5 min	Center black knob locks the blade position Protractor Graduation: 0°-90°, 90°-0°

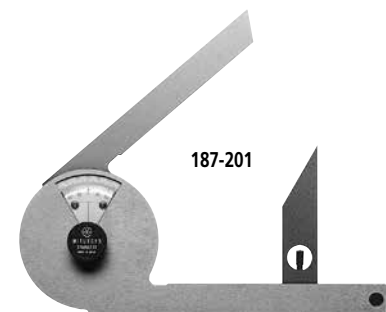

187-201

Technical Data


Graduation:	5 min. (0° - 90° - 0°)
Blade edge angle:	30° and 60°
Diameter:	2.56" / 70mm

Radius Gages

SERIES 186

FEATURES

- Radius size is stamped on each gage.
- Both concave and convex radius gages become a pair.
- With a locking clamp.

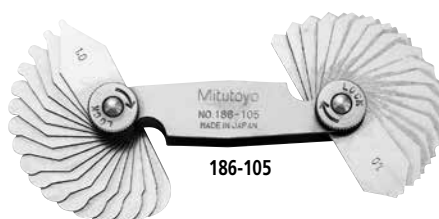

186-105


SPECIFICATIONS

Metric			
Range	Order No.	Composition of leaves	Remarks
0.4 - 6mm	186-110	18 leaves: 0.4, 0.8, 1, 1.2, 1.5, 1.6mm, 1.75 - 3mm by 0.25mm, 3.5 - 6mm by 0.5mm	90° arc
0.5 - 13mm	186-902	26 leaves: 0.5 - 13mm by 0.5mm	90° arc
1 - 7mm	186-105	34 pairs: 1 - 3mm by 0.25mm 3.5 - 7mm by 0.5mm	180° arc
7.5 - 15mm	186-106	32 pairs: 7.5 - 15mm by 0.5mm	180° arc
15.5 - 25mm	186-107	15 pairs: 15.5 - 20mm by 0.5mm, 21 - 25mm by 1mm	180° arc

Inch			
Range	Order No.	Composition of leaves	Remarks
1/32" - 17/64"	186-103	16 leaves: 1/32" - 17/64" by 64ths	90° arc
1/32" - 1/4"	186-101	15 pairs: 1/32" - 1/4" by 64ths	180° arc
17/64" - 1/2"	186-102	16 pairs: 17/64" - 1/2" by 64ths	180° arc
9/32" - 33/64"	186-104	16 leaves: 9/32" - 33/64" by 64ths	90° arc

Technical Data

Accuracy: ±.002"

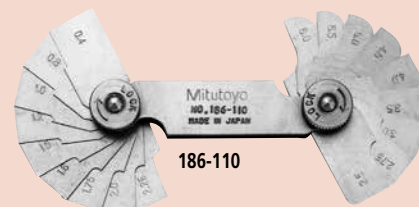


186-110

Pitch Gages

SERIES 188, 950

FEATURES

- Thread pitch size is stamped on each gage.
- Metric, Unified, and Whitworth screw pitch gages.

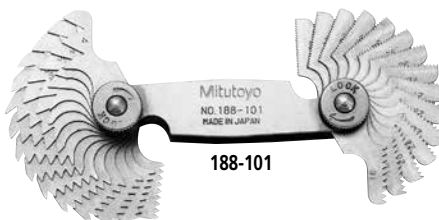

188-101

SPECIFICATIONS

Metric Screw Pitch Gages (60°)

Range	Order No.	Composition of leaves
0.25 - 2.5mm	188-153	28 leaves: 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 1.00, 1.10, 1.20, 1.25, 1.30, 1.40, 1.50, 1.60, 1.70, 1.75, 1.80, 1.90, 2.00, 2.50 mm
0.35 - 6mm	188-130	22 leaves: 0.35, 0.4, 0.45, 0.5, 0.6, 0.7, 0.75, 0.8, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6mm and 60° angle gage
0.4 - 7mm	188-122	21 leaves: 0.4, 0.5, 0.7, 0.75, 0.8, 0.9, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm
0.4 - 7mm	188-121	18 leaves: 0.4, 0.5, 0.75, 1, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7mm

Unified Screw Pitch Gages (60°)

Range	Order No.	Composition of leaves
4 - 42 TPI	188-111	30 leaves: 4, 4 1/2, 5, 5 1/2, 6, 7, 8, 9, 10, 11, 11 1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42 TPI
4 - 84 TPI	950-253	51 leaves: 4, 4 1/2, 5, 5 1/2, 6, 7, 8, 9, 10, 11, 11 1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84 TPI

Note: Metric and Unified Pitch Gage Set (**188-151**) is available. It consists of **188-122** (Metric) and **188-111** (Unified).

Metric and Unified Screw Pitch Gage Set (60°)

Range	Order No.	Composition of leaves
0.4 - 7mm / 4 - 42 TPI	188-151	51 leaves: Set of 188-122 and 188-111
0.5 - 6mm / 4 - 56 TPI	188-152	28 leaves: 4, 6, 8, 10, 11, 11-1/2, 12, 13, 16, 20, 28, 32, 40, 56 TPI 0.50, 0.75, 1.00, 1.25, 1.50, 1.75, 2.00, 2.50, 3.00, 3.50, 4.00, 4.50, 5.00, 6.00 mm

Whitworth Screw Pitch Gages (55°)

Range	Order No.	Composition of leaves
4 - 42 TPI	188-101	30 leaves: 4, 4 1/2, 5, 5 1/2, 6, 7, 8, 9, 10, 11, 11 1/2, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42 TPI
4 - 60 TPI	188-102	28 leaves: 4, 4 1/2, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 16, 18, 19, 20, 22, 24, 25, 26, 28, 30, 32, 34, 36, 40, 48, 60 TPI

Technical Data

TPI	Metric	Accuracy	
		Pitch (mm)	Angular (minutes)
4-6	6.35-4.23	±0.05	±35
7-12	3.63-2.12	±0.05	±40
13-25	1.95-1.02	±0.05	±45
26-48	0.98-0.53	±0.05	±50
60	0.42	±0.05	±60

Radius Gages-Sets

SERIES 186

FEATURES

Decimal Radius Gages to 1"

Fractional Radius Gages to 1"


MITUTOYO Radius Gages are recommended for checking or laying out concave or convex radii. An individual gage for each dimension makes it possible to verify radius or fillet dimensions easier, faster and more accurately in machining, layout, inspection and pattern-making work. The measuring surfaces are precisely finished with smooth, accurate edges. The Radius Gages are available separately or in six handy sets. Each Radius Gage has five measuring locations, and it is identified with its particular radius dimensions. The gages have a satin or dull-chrome finish.

The Holding Cases, provided to protect the sets of Radius Gages, have indexed pockets to facilitate the selection of the proper size gage. A 4" long holder is furnished with Set No. 186-901 to make it possible to check radii in confined or hard-to-reach locations.



186-901

Accuracy: $\pm 0.0016''$ / 0.04mm



5 concave and convex radii per each leaf.

SPECIFICATIONS

Order No.	No. of Leaves	Sizes	Remarks
186-901	25	1/64"–17/64" by 64ths and 9/32"–1/2" by 32nds	Holder
186-903	17	1/64"–17/64" by 64ths	
186-904	8	9/32"–1/2" by 32nds	
186-905	8	9/16"–1" by 16ths	Holder
186-906	26	.010–.030" by .005" .040–.100" by .010" .120–.300" by .020" .350–.500" by .050"	Holder
186-907	10	.550–1" by .050"	

Decimal

Radius	Part No.	Radius	Part No.
.010"	211798	.240"	211816
.015"	211799	.260"	211817
.020"	211800	.280"	211818
.025"	211801	.300"	211819
.030"	211802	.350"	211820
.040"	211803	.400"	211821
.050"	211804	.450"	211822
.060"	211805	.500"	211823
.070"	211806	.550"	211824
.080"	211807	.600"	211825
.090"	211808	.650"	211826
.100"	211809	.700"	211827
.120"	211810	.750"	211828
.140"	211811	.800"	211829
.160"	211812	.850"	211830
.180"	211813	.900"	211831
.200"	211814	.950"	211832
.220"	211815	1.000"	211833

Fraction

Radius	Part No.	Radius	Part No.
1/64"	201441	5/16"	201459
1/32"	201442	11/32"	201460
3/64"	201443	3/8"	201461
1/16"	201444	13/32"	201462
5/64"	201445	7/16"	201463
3/32"	201446	15/32"	201464
7/64"	201447	1/2"	201465
1/8"	201448	9/16"	211790
9/64"	201449	5/8"	211791
5/32"	201450	11/16"	211792
11/64"	201451	3/4"	211793
3/16"	201452	13/16"	211794
13/64"	201453	7/8"	211795
7/32"	201454	15/16"	211796
15/64"	201455	1"	211797
1/4"	201456		
17/64"	201457		
9/32"	201458		

Digital Protractor

SERIES 950

FEATURES

These Digital Protractors present inclination values on an easy-to-read liquid crystal display. The measurements are generated by an electronic gravity sensor and processed by the latest low-power electronic circuit technology.

- Full 360° range (90° x 4).
- Machined aluminum frame.
- Alternate reference (zero).
- Reading hold.
- Simple calibration requiring no special fixtures.
- Display remains upright to view at all angles. (950-317, Pro 360 Model).
- RS232C output. (950-318 Pro 3600 Model).
- Supplied in fitted carrying case.



Front View



950-317 Back View




950-318 Back View

SPECIFICATIONS

Order No.	950-317	950-318
Model	Pro 360	Pro 3600
Range	360° (90°x4)	360° (90°x4)
Resolution	0.1°	0.01° (0° to 9.99°) 0.1° (10° to 90°)
Accuracy	±0.1° Level ±10°, Plumb ±10° ±0.2° Maximum error	±0.05° (0° to 10°) ±0.1° (80° to 90°) ±0.2° (10° to 80°)
Repeatability	±0.1°	±0.05°
Cross Axis Error	Minimal	Minimal
Battery Life	500 Hrs. Standard 9-Volt Battery	500 Hrs. Standard 9-Volt Battery
Temperature Operation	-5°C to 50°C (23° to 122°F) -20°C to 65°C (-4°F to 149°F)	-5°C to 50°C (23° to 122°F) -20°C to 65°C (-4°F to 149°F)
Storage		
Weight	289g (10.2oz.)	295g (10.4oz.)
Output	N/A	RS-232C Compatible
Standard Accessories	Plastic Case	Plastic Case


±Represents clockwise or counter-clockwise slope.

DIMENSIONS

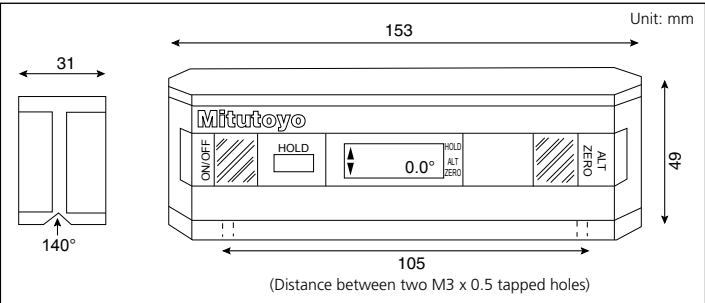

Optional Accessories

50AAA983A RS-232C Output cable w/foot switch

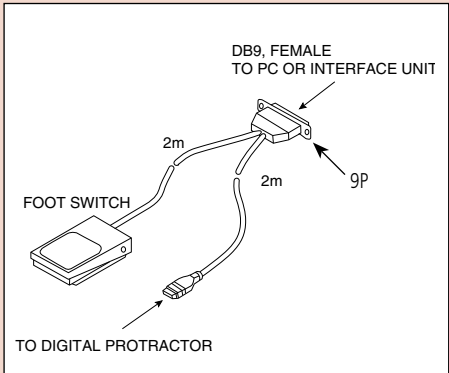

50AAA983A RS-232C Output cable w/foot switch 10P-9P

Digital Hand Tachometers

SERIES 982

FEATURES

- New Digital Hand Tachometers are compact and easy to handle.
- NIST Certification is supplied with each Digital Hand Tachometer.
- Model PH-200LC (982-552) has laser Diode Detection and a combination of Contact and Non-Contact measurement.
- Supplied with plastic carrying case.




982-551




982-552

DIMENSIONS

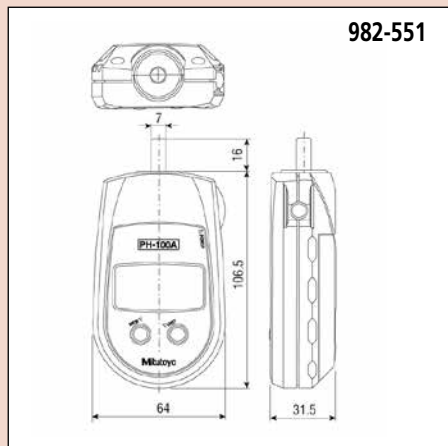

982-551

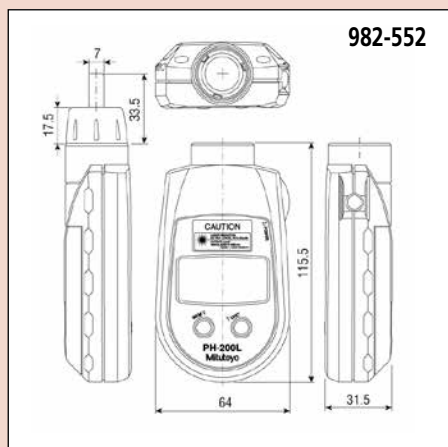

982-552

SPECIFICATIONS

Order No.	982-551	982-552
Model No.	PH-100A	PH-200LC
Revolution per minute	1.0 – 25,000 rpm	—
Rotation speed	—	Non-contact: 6.0 – 99,999 rpm; Contact: 6.0 – 25,000 rpm
Measuring accuracy Revolution Surface, Speed, Length	1.0 – 599.9rpm: ± 1 rpm, 600.0 – 25,000 rpm: $\pm 0.006\%$ and ± 0.5 digit $\pm 0.4\%$ and 1 digit	6.0 – 599.9 rpm: ± 1 rpm, 600.0 – 99,999 rpm $\pm 0.006\%$ and ± 0.5 digit $\pm 0.4\%$ and ± 1 digit
Detection	Optical coupler, 20 pulses per revolution	Laser diode
Outside dimensions	4.83" L x 2.52" W x 1.24" H (122.5mm x 64mm x 31.5mm)	4.55" L x 2.52" W x 1.24" H Overall length with contact adapter: 149mm
Mass	170 g	160 g
Power	Battery: AA 3 pcs.	Battery: AA 3 pcs.

Optional Accessories For Digital Hand Tachometers

Order No.	Description	Dimension	Drawing
010049	Cone Adapter, Standard	D = 1/2"	
010050	Cone Adapter, 5/8"	D = 5/8"	
010051	Cone Adapter, 3/4"	D = 3/4"	
010052	Cone Adapter, 1-1/4"	D = 1-1/4" d = 1/2"	
010053	Funnel Adapter, Standard	D = 1/2"	
010054	Funnel Adapter, 3/4"	D = 3/4"	
010055	Measuring Wheel FPM (6" cir), Standard	D = 1.91"	
010056	Measuring Wheel FPM (12" cir)	D = 3.82"	
010057	Measuring Wheel YPM (0.1 yard cir)	D = 1.15"	
010058	Measuring Wheel MPM (0.1 meter cir)	D = 1.25"	
010059	Reflective Tabs 1/2" square (35 pcs)		
010060	Extension Shaft (3" length)		


Bench Center

SERIES 967


FEATURES

- Used with a dial test indicator (optional), the Bench Center provides precision measurement of concentricity verification on cylindrical workpieces.
- With an indicator clamp. (Holding stem diameter: 9.53mm / .375")

Order No.: 967-201M

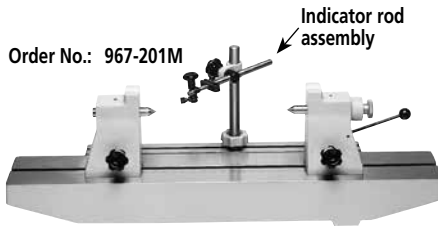

DIMENSIONS

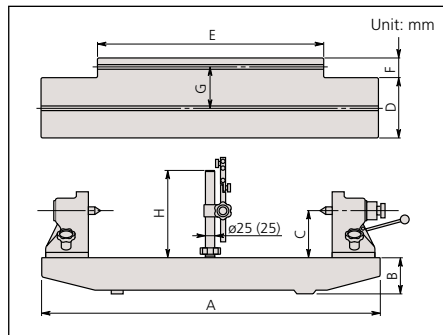

Order No.	A	B	C	D	E	F	G	H
967-203-10	310	40	50	70	178	41	60	134.5
967-201-10	500	45	75	80	370	36	60	194.5
967-204-10	700	80	100	140	500	65	110	194.5
967-202-10	900	100	125	160	600	50	104	230

SPECIFICATIONS

Order No.	Center-to-Center	Workpiece Capacity Diameter	Max. Weight Hold	Parallelism of Centers	Flatness of Surface	Attachment Diameter	Mass (kg)
967-203-10	5.9" / 150mm	3.8"	17.5 lbs. (8kg)	.0002"	.0004"	Ø3/8"	7
967-201-10	11.8" / 300mm	5.8"	35 lbs. (16kg)	.0002"	.0006"	Ø3/8"	13
967-204-10	17.7" / 450mm	7.8"	44 lbs. (20kg)	.0002"	.0007"	Ø3/8"	60
967-202-10	23.6" / 600mm	9.8"	66 lbs. (30kg)	.00024"	.0008"	Ø3/8"	70

Technical Data

Maximum workpiece dia.: 300mm
Maximum workpiece height: 150mm
Mass: 13kg
Spindle Tip Material: Hardened Steel

Optional Accessories:

56AAJ988 Special attachment for mounting **967-201-10** in vertical position.

56AAJ987 Special attachment for mounting **967-203-10** in vertical position.

56AAK066 Indicator rod assembly
967-201-10
967-203-10

56AAK426 Indicator rod assembly
967-202-10
967-204-10

Granite Surface Plate Accessories

SERIES 517

These accessories made from the same high quality black granite as Mitutoyo surface plates, allow extra flexibility in work holding and positioning.

SPECIFICATIONS

Angle Blocks with or without inserts

Grade	Laboratory*			Master**		
	4 Face			4 Face		
Size	2 Face	no inserts	w/ inserts	2 Face	no inserts	w/ inserts
4 x 4 x 4"	517-767	517-761	517-773	517-867	517-861	517-873
6 x 6 x 6"	517-768	517-762	517-774	517-868	517-862	517-874

*Laboratory overall accuracy: .000025" per 6".

**Master overall accuracy: .000050" per 6".

Parallels

Grade	Pair Accuracy	Laboratory		Master		
Size		2 Face	4 Face	Accuracy	2 Face	4 Face
.75 x 1 x 6"	.00003"	517-755	517-750	.00006"	517-855	517-850
.75 x 1.5 x 9"	.00004"	517-756	517-751	.00008"	517-856	517-851
1 x 2 x 12"	.00006"	517-757	517-752	.0001"	517-857	517-852

V-Blocks Matching Pair

V-1 type have matching accuracy on "V" from the bottom face only.
V-5 type have four face matching accuracy plus "V".

Grade	Laboratory*		Master**	
Size	V-1	V-5	V-1	V-5
2 x 2 x 2.5"	517-787	517-783	517-887	517-883
3 x 3 x 3"	517-788	517-784	517-888	517-884
6 x 6 x 6"	517-789	517-785	517-889	517-885

*Laboratory overall accuracy: .00005" per 6".

**Master overall accuracy: .0001" per 6"

Angle Blocks



517-862
(without inserts)

517-884 V-Blocks (matching pair)



517-852
Parallels
(in pairs)



Black Granite Surface Plate

SERIES 517

FEATURES

- Natural granite seasoned for thousands of years is free from deterioration or dimensional change over time.
- Granite surface plate has many advantages over cast iron surface plates:
Twice as hard as cast iron.
Minimal changes in dimension due to temperature changes.
Free from wringing, so there is no interruption of work.
Free from burrs or protrusions because of the fine grain structure and insignificant

- stickiness; this ensures a high degree of flatness over a long service life and causes no damage to other parts or instruments.
- Trouble-free operation for use with magnetic materials.
- Long life and rust-free, resulting in low maintenance costs.
- MITUTOYO Granite Surface Plates meet or exceed Federal Specification GGG-P-463c. Each Surface Plate is shipped with a Certificate of Accuracy which guarantees its accuracy and verifies its traceability to the National Institute of Standards and Technology.
- All plates from 48" x 108" and larger are Machine Base Gray Granite. Smaller plates are Black Granite.
- Surface Plates, to size of specifications other than standard, available on special order.
- Surface Plates, with the bolt screws, available on special order.
- All MITUTOYO Surface Plates shipped F.O.B. Escondido, California.

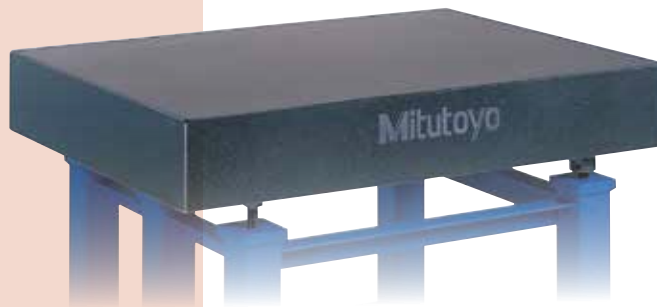

SPECIFICATIONS

Inch 100 lbs.-Load / sq. ft. no ledge

Size	AA Laboratory Grade				A Inspection Grade				B Shop Grade			
	H	Acc.*	Order No.	Wt.	H	Acc.*	Order No.	Wt.	H	Acc.*	Order No.	Wt.
8 x 12"	3"	50	517-700	30	2"	100	517-800	25	2"	200	517-900	25
9 x 12"	3"	50	517-701	40	3"	100	517-801	40	2"	200	517-901	30
12 x 12"	3"	50	517-702	50	3"	100	517-802	50	3"	200	517-902	50
12 x 18"	4"	50	517-703	100	4"	100	517-803	100	4"	200	517-903	100
18 x 18"	4"	50	517-704	150	4"	100	517-804	150	3"	200	517-904	100
18 x 24"	4"	65	517-705	200	4"	130	517-805	200	4"	260	517-905	200
24 x 24"	5"	70	517-706	310	4"	140	517-806	259	3"	280	517-906	200
24 x 30"	5"	75	517-707	400	5"	150	517-807	400	4"	300	517-907	300
24 x 36"	6"	85	517-708	600	5"	170	517-808	500	4"	340	517-908	400
24 x 48"	8"	150	517-709	1000	6"	300	517-809	800	5"	600	517-909	650
30 x 36"	6"	100	517-710	800	5"	200	517-810	600	5"	400	517-910	600
30 x 48"	8"	150	517-711	1300	6"	300	517-811	1000	6"	600	517-911	1000
30 x 60"	12"	200	517-712	1900	10"	500	517-812	1535	8"	1000	517-912	1150
36 x 36"	6"	100	517-713	900	5"	200	517-813	780	5"	400	517-913	700
36 x 48"	8"	150	517-714	1500	6"	300	517-814	1200	6"	600	517-914	1200
36 x 60"	12"	200	517-715	2850	10"	400	517-815	2350	8"	800	517-915	1900
36 x 72"	12"	250	517-716	3400	10"	500	517-816	2850	8"	1000	517-916	2300
48 x 48"	8"	200	517-717	2025	6"	400	517-817	1525	6"	800	517-917	1500
48 x 60"	12"	250	517-718	3800	10"	500	517-818	3150	8"	1000	517-918	2525
48 x 72"	12"	300	517-719	4500	10"	600	517-819	3800	8"	1200	517-919	3050
48 x 84"	14"	350	517-720	6150	12"	700	517-820	5325	10"	1400	517-920	4450
48 x 96"	14"	400	517-721	7000	12"	800	517-821	6050	10"	1600	517-921	5150
48 x 108"	14"	500	517-722	7900	12"	1000	517-822	6830	10"	2000	517-922	5700
48 x 120"	18"	700	517-723	11300	16"	1400	517-823	10160	14"	2800	517-923	8800
48 x 144"	18"	800	517-724	13500	16"	1600	517-824	12200	14"	3200	517-924	10500
60 x 60"	14"	250	517-725	5500	12"	500	517-825	4800	10"	1000	517-925	4000
60 x 72"	14"	350	517-726	6600	12"	700	517-826	5750	10"	1400	517-926	4900
60 x 96"	14"	500	517-727	8800	12"	1000	517-827	7600	10"	2000	517-927	6500
60 x 120"	16"	700	517-728	11050	14"	1400	517-828	11100	12"	2800	517-928	9800
60 x 144"	18"	900	517-729	16950	16"	1800	517-829	15100	14"	3600	517-929	14200
72 x 72"	14"	400	517-730	8000	12"	800	517-830	7000	10"	1600	517-930	5700
72 x 96"	16"	500	517-731	12025	14"	1000	517-831	10800	12"	2000	517-931	9200
72 x 120"	16"	700	517-732	15070	14"	1400	517-832	13400	12"	2800	517-932	11400
72 x 144"	18"	1000	517-733	20300	16"	2000	517-833	18100	14"	4000	517-933	15900


* Accuracies shown in microinches (µin)

Mitutoyo

Inch

50 lbs.-Load / sq. ft. no ledge

Size	AA Laboratory Grade				A Inspection Grade				B Shop Grade			
	H	Acc.	Order No.	Wt.	H	Acc.	Order No.	Wt.	H	Acc.	Order No.	Wt.
8 x 12"	2"	50	517-740	25	2"	100	517-840	25	2"	200	517-940	25
12 x 18"	3"	50	517-741	80	3"	100	517-841	80	2"	200	517-941	60
18 x 24"	4"	65	517-742	200	3"	130	517-842	165	2"	260	517-942	100
24 x 36"	5"	85	517-743	500	4"	170	517-843	400	3"	340	517-943	300
36 x 48"	6"	150	517-746	1200	5"	300	517-846	1000	4"	600	517-946	800

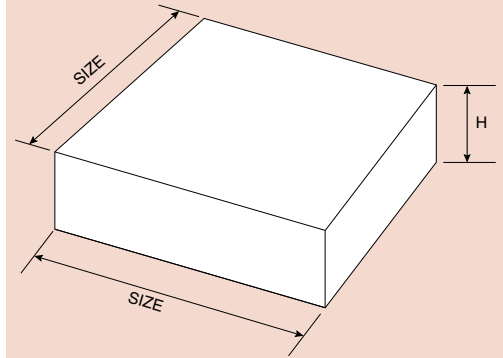

Steel Stands

Steel Stands for supporting Black Granite Surface Plates, at working levels, are available either stationary or with casters. Sizes and weights are given below.

SPECIFICATIONS

Size	Stationary		With Casters	
	Order No.	Wt.	Order No.	Wt.
12 x 18"	517-950	42lbs	517-950-1	46lbs
18 x 18"	517-951	46lbs	517-951-1	50lbs
18 x 24"	517-952	50lbs	517-952-1	56lbs
24 x 24"	517-954	65lbs	517-954-1	69lbs
24 x 30"	517-955	70lbs	517-955-1	74lbs
24 x 36"	517-956	73lbs	517-956-1	77lbs
24 x 48"	517-957	90lbs	517-957-1	94lbs
30 x 36"	517-960	85lbs	517-960-1	89lbs
30 x 48"	517-961	95lbs	517-961-1	99lbs
30 x 60"	517-962	105lbs	517-962-1	109lbs
36 x 36"	517-963	95lbs	517-963-1	99lbs
36 x 48"	517-964	105lbs	517-964-1	109lbs
36 x 60"	517-965	160lbs	517-965-1	164lbs
36 x 72"	517-966	180lbs	517-966-1	184lbs
48 x 48"	517-967	190lbs	517-967-1	194lbs
48 x 60"	517-968	200lbs	517-968-1	204lbs
48 x 72"	517-969	205lbs	517-969-1	209lbs
48 x 84"	517-970	320lbs	517-970-1	324lbs
48 x 96"	517-971	335lbs	517-971-1	339lbs
48 x 108"	517-972	350lbs	517-972-1	354lbs
48 x 120"	517-973	365lbs	517-973-1	369lbs
48 x 144"	517-974	430lbs	517-974-1	434lbs
60 x 60"	517-975	245lbs		
60 x 72"	517-976	340lbs		
60 x 96"	517-977	375lbs		
60 x 120"	517-978	455lbs		
60 x 144"	517-979	480lbs		
72 x 72"	517-980	380lbs		
72 x 96"	517-981	465lbs		
72 x 120"	517-982	510lbs		
72 x 144"	517-983	530lbs		



Note: The total height of stand and granite plate is 36". If ordering only stand, stand height will be made according to a Grade A granite plate thickness.