

Wireless Data Logging System

RTR-500 Series



Remote Unit (Data Logger)

Measure / Record

- Temperature • Pt100 / Pt1000 • Thermocouple
- Humidity • Voltage • 4-20mA • Pulse
- Illuminance • UV • CO2



Wireless Communication

Base Unit

Data Collection

- Recorded Data Collection via Wireless Communication
- Warning Monitoring Function
- Monitoring Function

RTR-500DC Portable Data Collector



RTR-500 Wireless Base Station




USB Connection




USB Connection

Viewing Graph on Site

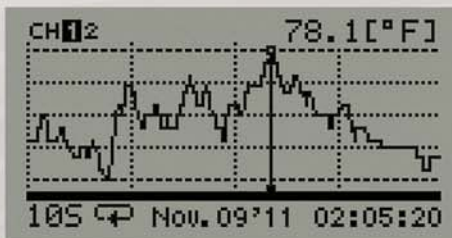


Reading Data from a Graph and Spreadsheet

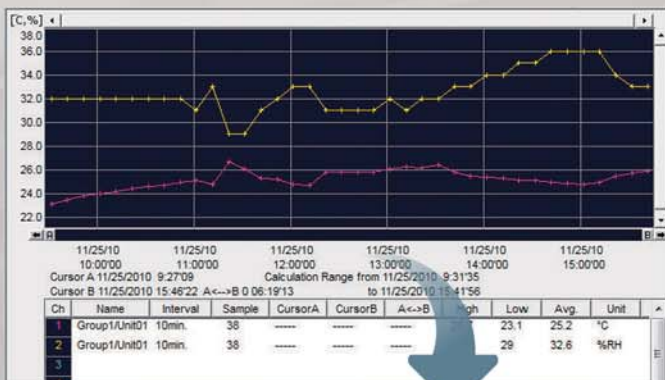

Export



Monitoring for Warning and Current Readings on PC

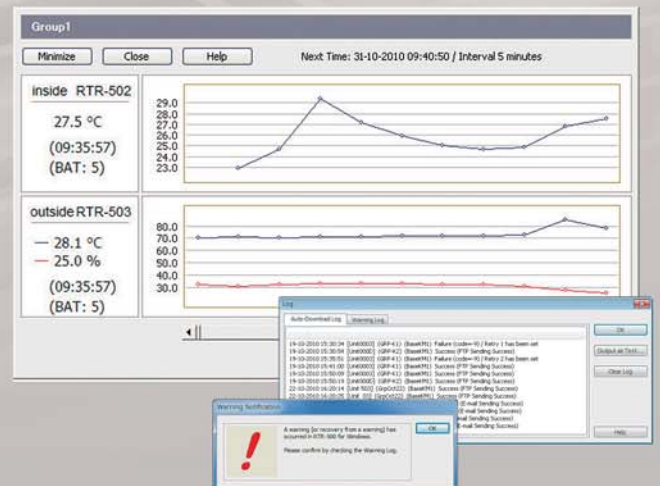

Versatile Next Generation Design for Today

The RTR-500 Series includes data loggers designed to measure and record a wide variety of items as well as a range of base stations to enable wireless collection of recorded data. The collected data can then be transmitted to a PC by a variety of methods such as USB, E-mail, or FTP.

Moreover, various functions, such as the monitoring of current readings and warning notification, make it a powerful data management system.



Variety of Wireless Data Logger Selections to

Temperature



RTR-501 / RTR-501L

Measurement Range: -40 to 80°C
Water Resistance: IP67 (Immersion Proof)
Temperature Sensor: Thermistor

RTR-502 / RTR-502L

Measurement Range: -60 to 155°C
Water Resistance: IP64 (splash proof / rated for use in daily life)
Attached Sensor:
Temperature Sensor (TR-5106)

RTR-503 / RTR-503L

Measurement Range:
Temperature: 0 to 55°C
Humidity: 10 to 95 %RH
Attached Sensor:
Temperature / Humidity Sensor (TR-3310)

Voltage



RTR-505-V / RTR-505-VL

Measurement Range: 0 to 22 V
Attached Module:
Input Module (VIM-3010)
Measurement Resolution:
Minimum of 0.1 mV Preheat Function

RTR-505-mA / RTR-505-mAL


Measurement Range:
0 to 20 mA (Operational up to 40 mA)
Attached Module: Input Module (AIM-3010)

RTR-505-P / RTR-505-PL

Measurement Range: Pulse count 0 to 61,439
Signal Input: Contact Input / Voltage Input
Input Frequency: 0 to 3.5 kHz
Attached Cable: Input Cable (PIC-3150)
For use with Voltmeters, Flow Meters and Passage Counters



- Products with this mark comply with EN12830, the European Standard regarding Temperature recorders for the transport, storage and distribution of chilled, frozen, deep-frozen/ quick-frozen food and ice cream. (Excluding L Type)
- L-type models (model names which include " L ") are designed with a large capacity battery pack. Battery life of the L type is four times longer than that of the normal type.



Meet Your Needs

Temperature / Humidity High Precision Wide Range



RTR-507 / RTR-507L

Measurement Range:

Temperature: -30 to 80°C

Humidity: 0 to 99 %RH

Attached Sensor:

High Precision Temperature/Humidity Sensor (HHB-3101)

Temperature - Pt100 / Pt1000



RTR-505-Pt / RTR-505-PtL

Measurement Range: -199 to 600°C

Attached Module:

Input Module (PTM-3010)

Sensor sold separately (For details about Pt sensors see the T&D Web Site)

Temperature - Thermocouple



RTR-505-TC / RTR-505-TCL

Measurement Range:

K: -199 to 1300°C

J: -199 to 750°C

T: -199 to 400°C

S: -20 to 1700 °C

Attached Module: Input Module (TCM-3010)

(Please purchase sensor separately)

Illuminance / UV Intensity / Temperature / Humidity



RTR - 574 - H

RTR-574 / RTR-574-H

H - type comes with our high precision temp/humidity sensor.

Measurement Range:

Illuminance: 0 to 130,000 lx

UV Intensity: 0 to 30 mW/cm²

Temperature: 0 to 55°C (H: -30 to 80°C)

Humidity: 10 to 95 %RH (H: 0 to 99 %RH)

Display Range of Cumulative Measurement

Illuminance: 0 lxh to 90 Mlxh

UV Intensity: 0 mW to 62 W/cm²h

Attached Sensor:

Illuminance UV Sensor ISA-3151

Temperature / Humidity Sensor THA-3151 (H: High Precision Temp/Humidity Sensor HHA-3151)

CO2 / Temperature / Humidity



RTR - 576 - H

RTR-576 / RTR-576-H

H - type comes with our high precision temp/humidity sensor.

Measurement Range:

CO2 Concentration: 0 to 9,999 ppm

Temperature: 0 to 55°C (H: -30 to 80°C)

Humidity: 10 to 95 %RH (H: 0 to 99 %RH)

Attached Sensor

CO2 Sensor: NDIR type

Temperature / Humidity Sensor THA-3001 (H: High Precision Temperature/

Humidity Sensor HHA-3151)

Base Unit equipped with GSM Cellular Phone Network Capabilities

Mobile Base Station - RTR-500GSM

- ▶ GSM communication makes it possible to gather recorded data and monitor for warnings even in environments where PCs or LAN connections aren't possible.
- ▶ Warning Monitoring Function
- ▶ Connect a GPS receiver to get location position info.
- ▶ Select a power source to meet your situation: batteries, AC adaptor or external power source.

Number of Possible Registrations (One Base)
Remote Units: Up to 20
Repeaters: Up to 5 units per Group
Number of Groups : Up to 4 Groups



T&D Web Storage Compatible (see p.11)

Application Examples


- Monitoring and Recording Temperature, Humidity and Location of Goods while in Transport
- Monitoring and Recording Temperature and Humidity in Distant Places where LAN Connection is Impossible
- Monitoring and Recording in Building and Environmental Temperature and Humidity in Situations where LAN Connections are not Possible or not Desirable

Note: At present, data loggers which are compatible with RTR-500GSM are as follows: RTR-501, RTR-502, RTR-503, RTR-505-Pt, and RTR-505-TC. (including L types)

GSM Cellular Phone Communication Function



Warning Monitoring Function

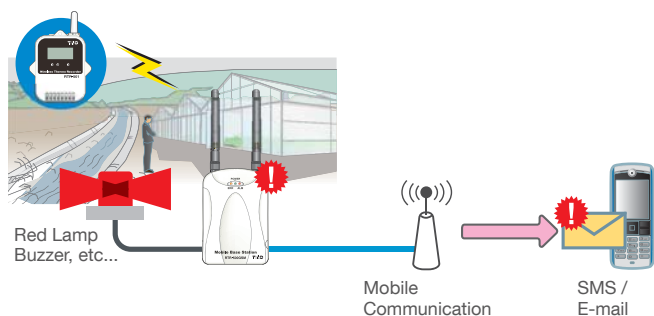

Easy Data Collection, Easy Graph Display, No Computer Necessary

Portable Data Collector - RTR-500DC

- From the RTR-500DC it is possible via wireless communication to make recording interval settings, and collect and save data.
- Includes a monitoring function whereby at a set interval the Collector communicates with data loggers and gathers current readings.
- An alarm buzzer sounds when a warning occurs.
- On the spot graphical viewing of recorded data.

Number of Possible Registrations (One Base)
Remote Units: Up to 32 units per Group
(For RTR-505 / 574 / 576 up to 16 units per Group)
Repeaters: Up to 15 units per Group
Number of Groups : Up to 7 Groups




Application Examples

- For Collecting Recorded Data and Monitoring Current Readings of Products while Moving on Production Lines
- For Collecting Recorded Data and Monitoring Current Readings of Packages in Cargo Compartments from a Truck's Cabin
- For Collecting Recorded Data at Construction Sites and other Places where PCs are not Available

Monitor On Site



Check Data at Office

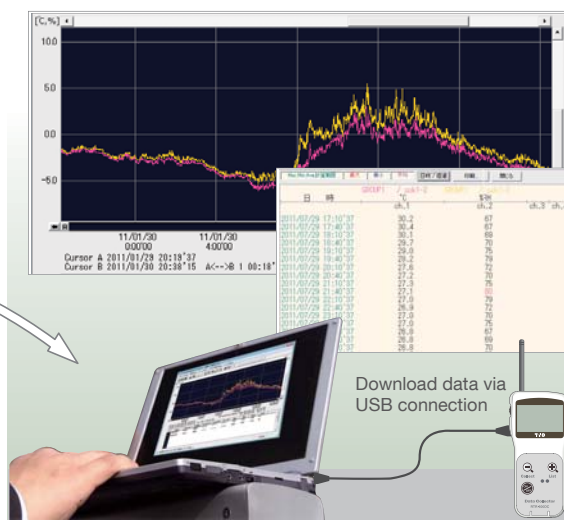

Network Base Station - RTR-500NW (for wired LAN) / RTR-500AW (for wireless LAN - 802.11 b/g)

- ▶ The system is designed to allow for the automatic sending of recorded data to an e-mail or FTP server without the need for a PC.
- ▶ Current readings can be monitored via in-company LAN.
- ▶ Registering with our "T&D WebStorage Service" makes it possible to view current readings on a PC or mobile device.
- ▶ The warning monitoring function with notification via e-mail or external contact ensures that important warnings are never missed by those nearby or far away.
- ▶ Being able to make and change settings via a network provides increased flexibility.


Number of Possible Registrations (One Base)
Remote Units: Up to 100
Repeaters: Up to 10 units per Group
Number of Groups : Up to 10 Groups



T&D Web Storage Compatible (see p.11)

Application Examples

- For Monitoring Temperature in Refrigerators and Freezers
- For Monitoring and Recording of Temperature, Humidity and Instrumentation Signals in Factories, Warehouses and other Building Facilities
- For Managing Temperature and Humidity in Server Rooms

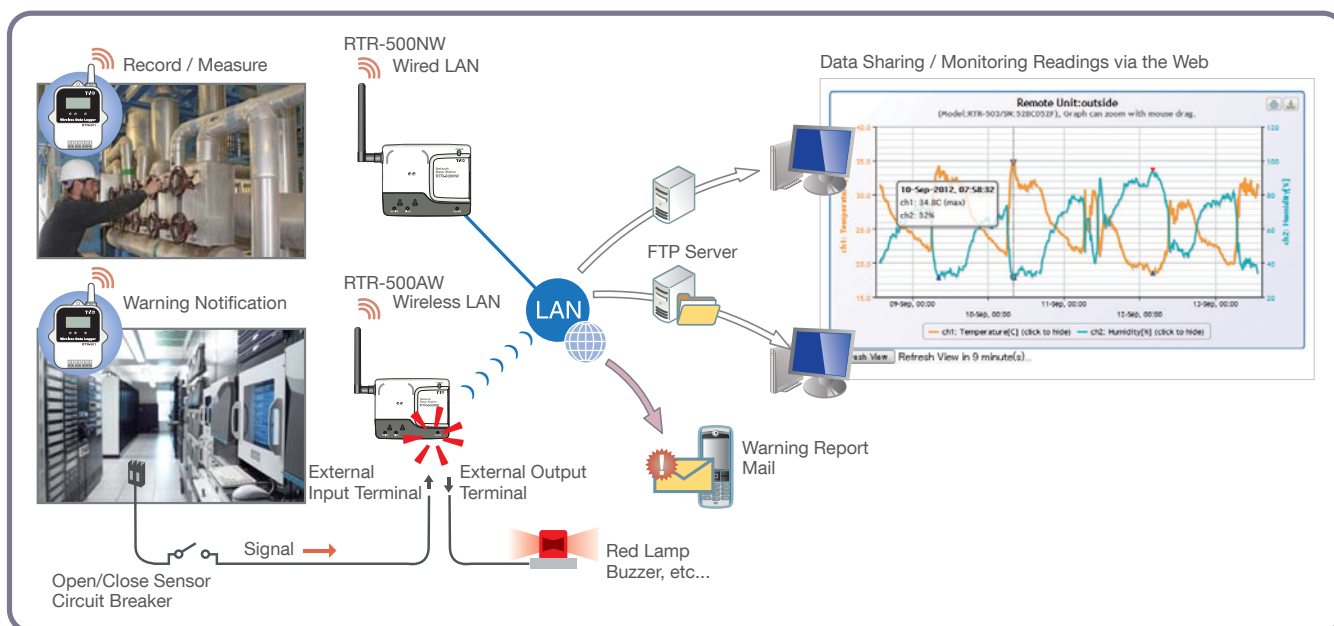

Wireless Base Station - RTR-500

- ▣ This system allows for the automatic collection of recorded data by simply connecting to a PC via USB.
- ▣ It is possible to check current readings and warning occurrences on the PC monitor or by e-mail.
- ▣ By using the supplied software, recorded data can easily be sent to an e-mail or FTP server.
- ▣ All Base Units can be set up to act as Repeaters.


Number of Possible Registrations (One Base)
Remote Units: Up to 32 units per Group
Repeaters: Up to 30 units per Group
Number of Groups : Up to 20 Groups



T&D Web Storage Compatible (see p.11)


Application Examples

- For Temperature and Humidity Management in Blood and Pharmaceutical Storage
- For Temperature Management of Refrigerated and Frozen Goods at Supermarkets and Convenience Stores
- For Preservation and Prevention of Deterioration of Exhibits in Museums and other Exhibit Forums

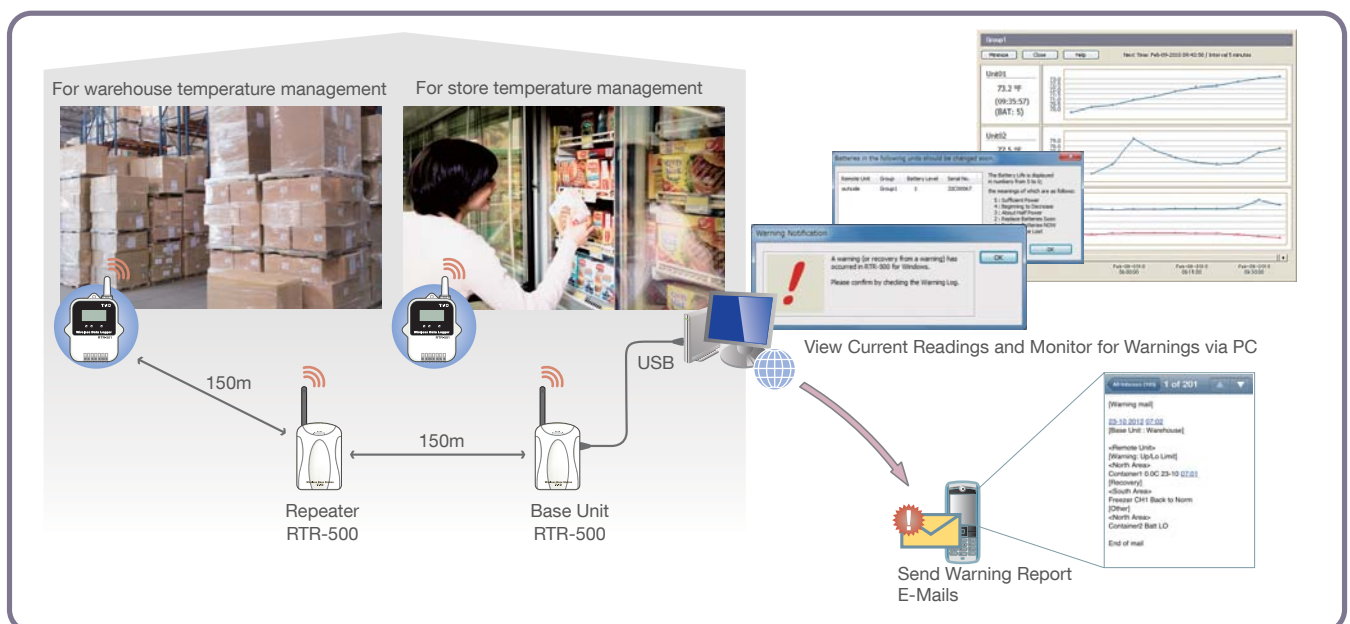

■ Never Miss Warning Notification System ■

Variety of Warning Notifications provides Reliable Oversight

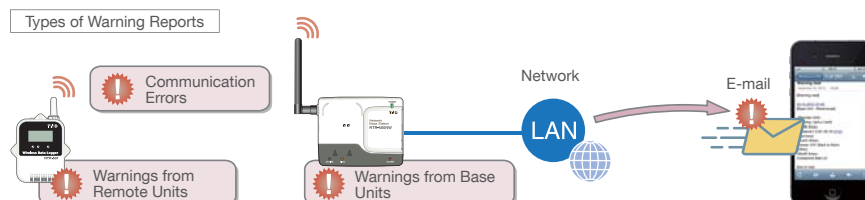

Warnings from Remote Units

Upper Limit / Lower Limit Exceeded

Settings can be made in each Remote Unit for "Upper and/or Lower Limits" and well as for "Judgement Time". This ensures that every instantaneous exceeding is not counted as a warning.

Sensor Error

This type of notification helps prevent loss of measurements due to sensor disconnection, malfunction or wire breakage.

Remote Unit Battery Level

This notifies the user that battery level is low before wireless communication can no longer be carried out.

Warnings from Base Units

Contact Input ON

It is possible to connect to an external device which has a warning output terminal to notify when a warning has occurred and the contact switches ON.

Recovery from Warning Status

This notifies the user when recovery from a warning has occurred; saving time and effort.

Communication Error Warnings

Wireless Communication Failures

This notifies the user that wireless communication has repeatedly failed.

	RTR-500NW RTR-500AW	RTR-500	RTR-500DC	RTR-500GSM
Upper Limit / Lower Limit Exceeded				
Sensor Error				
Remote Unit Battery Level			-	
Contact Input ON		-	-	
Recovery from Warning Status			-	
Wireless Communication Failures			-	


Range of Notification Tools means "No Miss" Management

By E-mail / SMS




Note: SMS is supported by the RTR-500GSM only.

With an External Alarm Device

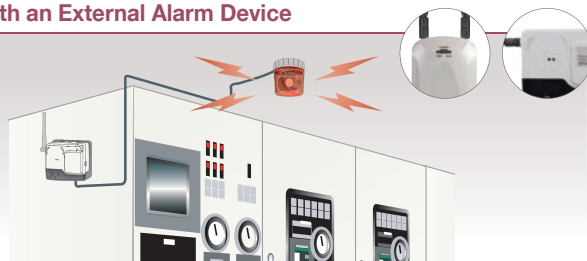

On a PC

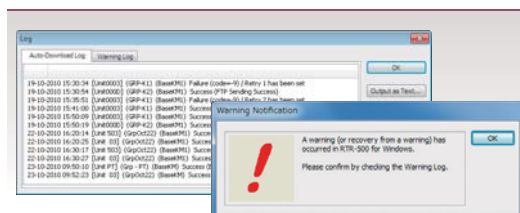


On a Data Collector



Monitor Measurement Readings from Any Location


Auto-Display of Current Readings at Set Interval

Via the Software

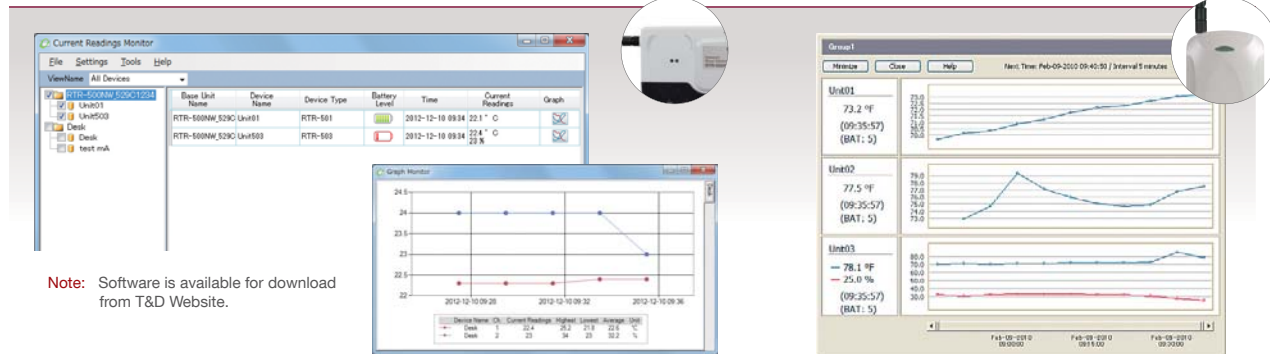

Measurement readings can be monitored using the dedicated software installed on the PC.


On a Data Collector

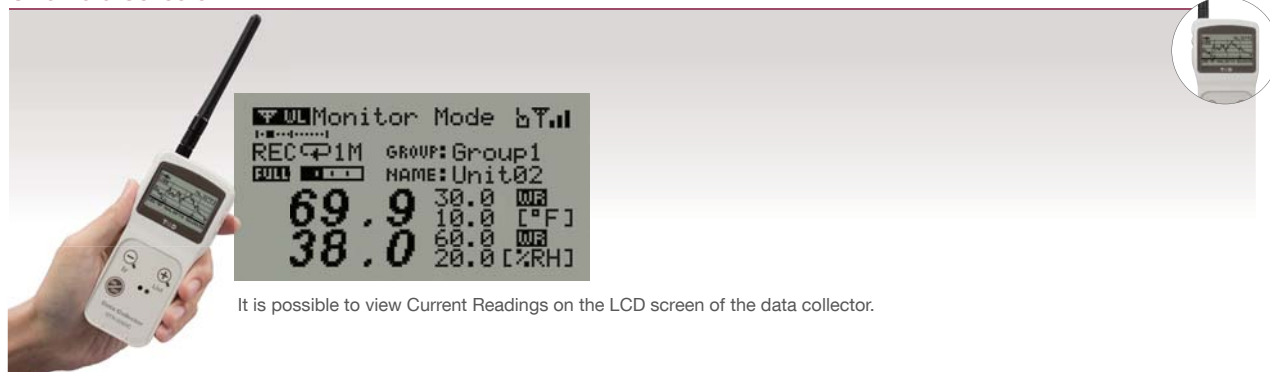

Via a Web Browser


Access Anytime Anywhere

T&D WebStorage Service

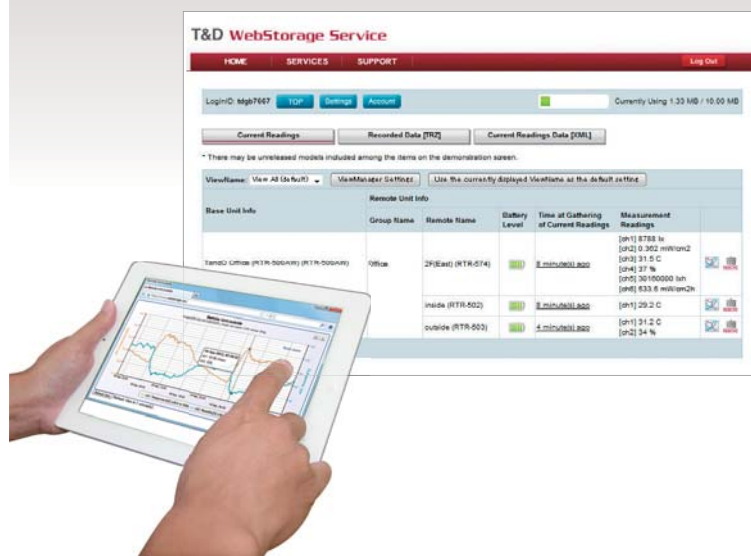

<http://www.webstorage-service.com/>

T&D **WebStorage Service** is a free web-based storage service provided by T&D Corporation. By sending downloaded recorded data to "T&D Web Storage", it is possible to access your important data from anywhere in the world at any time you wish.

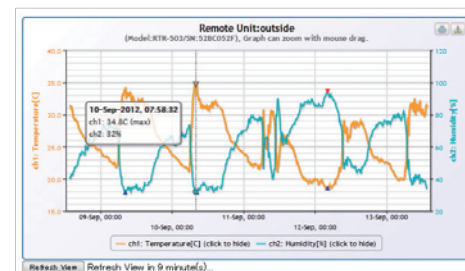

Registration is required to use T&D WebStorage Service.

RTR-500 Series - Options

Temperature Sensors for RTR-502 / 502L

Measurement Range: -60 to 155°C Sensor Temperature Durability: -70 to 180°C


Accuracy: Avg. $\pm 0.3^{\circ}\text{C}$ [-20 to 80°C], Avg. $\pm 0.5^{\circ}\text{C}$ [-40 to -20°C / 80 to 110°C], Avg. $\pm 1.0^{\circ}\text{C}$ [-60 to -40°C / 110 to 155°C]

Materials: ① Thermistor ② Stainless pipe (SUS316) ③ Fluoropolymer Compaction Tube ④ Fluoropolymer Coated Electrical Wire ⑤ Fluoropolymer Mold

Fluoropolymer Coated Sensor

TR-5101


Response Time (90%):
Approx. 80 sec. (in air)



[Unit: mm]

TR-5106

Response Time (90%):
Approx. 150 sec. (in air)
Approx. 7 sec. (in agitated water)




[Unit: mm]

Underwater Sensor

TR-5530

Response Time (90%):
Approx. 150 sec. (in air)
Approx. 15 sec. (in agitated water)

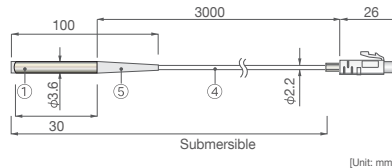


[Unit: mm]

Stainless Protection Sensor

TR-5220


Response Time (90%):
Approx. 150 sec. (in air)
Approx. 7 sec. (in agitated water)

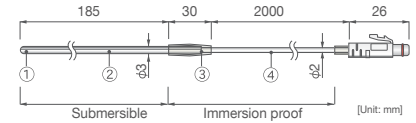

[Unit: mm]

TR-5320


Response Time (90%):
Approx. 90 sec. (in air)
Approx. 3 sec. (in agitated water)

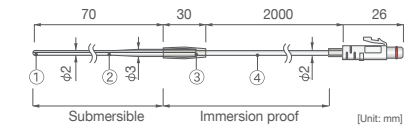

[Unit: mm]

TR-5420

Response Time (90%):
Approx. 90 sec. (in air)
Approx. 3 sec. (in agitated water)

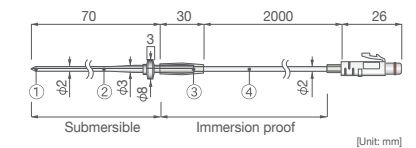


[Unit: mm]

Temperature Sensor Extension Cable for RTR-502 / 502L

TR-2C30

Waterproof Capacity: Splash proof
(rated for use in daily life)

Temperature Durability: -25 to 60°C

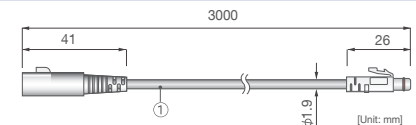

[Unit: mm]

Materials: ① Vinyl Coated Electrical Wire


Note: Only one extension cable per sensor. Using an extension cable may lead to measurement errors of $+0.3^{\circ}\text{C}$ at room temperature, and $+0.5^{\circ}\text{C}$ at -50°C .

Temperature / Humidity Sensor for RTR-503 / 503L

TR-3310

Measurement Range *:
Temperature: 0 to 55°C
Humidity: 10 to 95 %RH

Accuracy:
Temperature: Avg. $\pm 0.3^{\circ}\text{C}$
Humidity: $\pm 5\% \text{RH}$ (at 25°C, 50%RH)
Response Time (90%): Approx. 7 min.
Temperature Durability: -10 to 60 °C

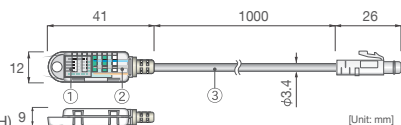

[Unit: mm]

* Do not expose to condensation, dampness, corrosive gases or organic solvents.

Materials: ① Temp/Humidity Sensor ② Polypropylene Resin ③ Vinyl Chloride Coated Electrical Wire

High Precision Temperature / Humidity Sensor for RTR-507 / 507L

HHB-3101

Measurement Range:
Temperature: -30 to 80°C
Humidity: 0 to 99 %RH

Measurement Resolution:
Temperature: 0.1°C
Humidity: 0.1 %RH

Accuracy (Temperature):
 $\pm 0.3^{\circ}\text{C}$ [0 to 50 °C]
 $\pm 0.5^{\circ}\text{C}$ [at all other temperatures]

Accuracy (Humidity):
 $\pm 2.5\% \text{RH}$ [at 25°C, 10 to 85 %RH]
 $\pm 4\% \text{RH}$ [at 25°C, 0 to 10 %RH or 85 to 99 %RH]
At temperatures other than 25°C and $\geq 0^{\circ}\text{C}$ add $\pm 0.1\% \text{RH}$ per degree of difference from 25.
Humidity Hysteresis: $\pm 1.5\% \text{RH}$ or lower *1


Response Time (90%):
Temperature: Approx. 7 min.
Humidity: Approx. 20 sec.

Long Term Stability: $\pm 1\% \text{RH/yr}$, $\pm 0.1^{\circ}\text{C/yr}$ (under normal operational conditions) *2

Materials: ① Temp/Humidity Sensor ② Polycarbonate ③ Vinyl Chloride Coated Electrical Wire

*1: When used in environments where temperature and humidity are over the values of 50°C 75%, 60°C 50%, 70°C 35%, and 80°C 25%, sensor hysteresis may fluctuate by values greater than $\pm 1.5\% \text{RH}$. Under certain circumstances, it may take some time to return to normal measurement capability.

*2: Do not expose to condensation, dampness, corrosive gases, or organic solvents or insecticide.

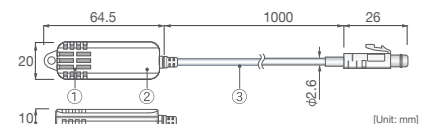


[Unit: mm]

Temp/Humidity Sensor Extension Cable for RTR-507 / 507L

TR-3C30

Waterproof Capacity: Splash proof
(rated for use in daily life)
Temperature Durability: -25 to 60 °C

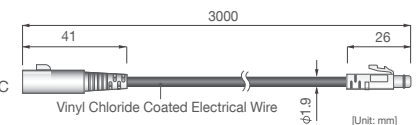

[Unit: mm]

Note: Only one extension cable per Temp/Humidity sensor.

Input Modules for RTR-505 / 505L


Materials: ①Polycarbonate ②Vinyl Coated Electrical Wire

Note: Input Module is not water resistant.

Thermocouple Module (RTR-505-TC / 505-TCL)

TCM-3010

Compatible Sensors:
Thermocouple: Type K, J, T, S
Sensor Connection:
Miniature Thermocouple Connector
Operating Environment:
Temperature: -40 to 80°C
Humidity: 90%RH or less (no condensation)

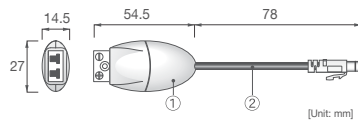


[Unit: mm]

4-20mA Module (RTR-505-mA / 505-mAL)

AIM-3010

Measurement Range:
0 to 20mA (Operational up to 40 mA)
Accuracy:
 $\pm 0.05 \text{ mA} + 0.3 \% \text{ of reading}$
(10 to 40 °C)
Operating Environment:
Temperature: -40 to 80°C
Humidity: 90%RH or less (no condensation)




[Unit: mm]

Voltage Module (RTR-505-V / 505-VL)

VIM-3010

Measurement Range: 0 to 22 V
Accuracy:
 $\pm 0.5 \text{ mV} + 0.3 \% \text{ of reading}$
(10 to 40 °C)
Measurement Resolution:
Minimum of 0.1mV
Preheat Function: 3V to 20V, 100mA
Operating Environment:
Temperature: -40 to 80°C
Humidity: 90%RH or less (no condensation)




[Unit: mm]

Pt Module (RTR-505-Pt / 505-PtL)

PTM-3010


Compatible Sensors:
Pt100 (3-wire), Pt1000 (3-wire)
Sensor Connection:
Screw Clamp Terminal Block: 3-Terminal
Operating Environment:
Temperature: -40 to 80°C
Humidity: 90%RH or less (no condensation)

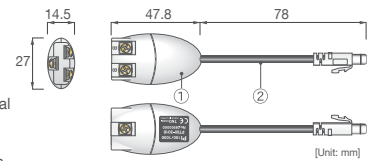

[Unit: mm]

Pulse Input Cable (RTR-505-P / 505-PL)

PIC-3150

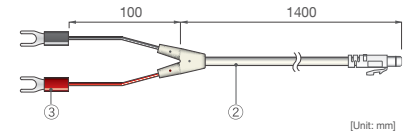


[Unit: mm]

Input Module Extension Cable

TR-3C30

Waterproof Capacity:
Splash proof
(rated for use in daily life)
Temperature Durability:
-25 to 60 °C

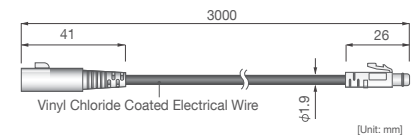

[Unit: mm]

Note: Only one extension cable per input module.

Pt100 Sensor for RTR-505-Pt / 505-PtL

For details about Pt100 Sensor, please visit the T&D Website.



Note: Pt100 Sensor is produced only upon receipt of order; therefore please allow four weeks from the time of order until shipping.

Sensors for RTR-574 / 576


Temperature / Humidity Sensor

THA-3001

Measurement Range *1:
 Temperature: 0 to 45°C
 Humidity: 10 to 95 %RH (no condensation)

Measurement Accuracy:
 Temperature: $\pm 0.5^{\circ}\text{C}$
 Humidity: $\pm 5\% \text{RH}$ [at 25°C and 50%RH]
 Response Time (90%): Approx. 7 min.

Materials: ①Temp/Humidity Sensor ②Polypropylene Resin



[Unit: mm]

High Precision Temperature/Humidity Sensor

HHA-3151

Measurement Range:
 Temperature: -30 to 80°C
 Humidity: 0 to 99 %RH

Measurement Resolution:
 Temperature: 0.1°C
 Humidity: 0.1 %RH

Accuracy (Temperature):
 $\pm 0.3^{\circ}\text{C}$ [0 to 50°C]
 $\pm 0.5^{\circ}\text{C}$ [at all other temperatures]


Accuracy (Humidity):
 $\pm 2.5\% \text{RH}$ [at 25°C, 10 to 85 %RH]
 $\pm 4\% \text{RH}$ [at 25°C, 0 to 10 %RH or 85 to 99 %RH]
 At temperatures other than 25°C and $\geq 0^{\circ}\text{C}$, add $\pm 0.1\% \text{RH}$ per degree of difference from 25.

Humidity Hysteresis: $\pm 1.5\% \text{RH}$ or lower *2

Response Time (90%):
 Temperature: Approx. 7 min.
 Humidity: Approx. 20 sec.

Long Term Stability: $\pm 1\% \text{RH/yr}$, $\pm 0.1^{\circ}\text{C/yr}$ (under normal operational conditions) *1

Materials: ① Temp/Humidity Sensor ② Polycarbonate ③ Vinyl Chloride Coated Electrical Wire

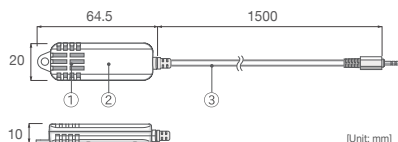

[Unit: mm]

*1: Do not expose to condensation, dampness, corrosive gases, or organic solvents (or insecticides for High Precision Temperature/Humidity Sensors).

*2: When used in environments where temperature and humidity are over the values of 50°C 75%, 60°C 50%, 70°C 35%, and 80°C 25%, sensor hysteresis may fluctuate by values greater than $\pm 1.5\% \text{RH}$. Under certain circumstances, it may take some time to return to normal measurement capability.

*3: Compared to the value measured by the T&D standard sensor for calibration under our calibration light source.

Temperature / Humidity Sensor


THA-3151

Measurement Range *1:
 Temperature: 0 to 55°C
 Humidity: 10 to 95%RH (No condensation)

Measurement Resolution:
 Temperature: 0.1°C
 Humidity: 1 %RH

Accuracy:
 Temperature: $\pm 0.5^{\circ}\text{C}$
 Humidity: $\pm 5\% \text{RH}$ [at 25°C and 50%RH]
 Response Time (90%): Approx. 7 min.

Materials: ①Temp/Humidity Sensor ②Polypropylene Resin ③Vinyl Chloride Coated Electrical Wire

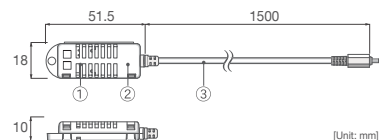

[Unit: mm]

Illuminance/UV Sensor (RTR-574)

ISA-3151

Measurement Range:
 Illuminance: 0 lx to 130 klx
 UV Intensity: 0 to 30 mW/cm²


Measurement Resolution:
 Illuminance: Minimum of 0.01 lx
 UV Intensity: Minimum of 0.001 mW/cm²

Accuracy:
 Illuminance: $\pm 5\%$ [10 lx to 100 klx at 25°C, 50% RH]
 UV Intensity: $\pm 5\%$ [0.1 to 30 mW/cm² at 25°C, 50%RH] *3

Relative Spectral Response:
 Illuminance: Approximated to the CIE standard response function $V(\lambda)$.
 UV Intensity: 260 to 400 nm (UVA / UVB)

Operating Environment *1:
 Temperature: -10 to 60°C
 Humidity: $\pm 90\% \text{RH}$ or lower

Materials: ① Polycarbonate ② Glass ③ Vinyl Coated Electrical Wire

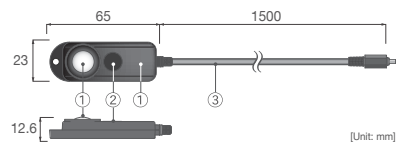


[Unit: mm]

Serial Communication Cable for RTR-574 / 576

TR-6C10

For communication between
 RTR-500DC and RTR-574 / 576

Note: Up to 3 extension cables can be connected to one sensor.




[Unit: mm]

Sensor Extension Cable for RTR-574 / 576

TR-1C30

Temperature Durability:
 -25 to 60 °C

Materials: ① Vinyl Coated Electrical Wire




[Unit: mm]

Communication Cable (RTR-500, RTR-500DC)

TR-07C (Serial Communication Cable)

For Communication with the Computer




[Unit: mm]

External Power Cable (RTR-500GSM)

BC-0201

Power Source Conditions:
 Voltage: DC 8 - 34V
 Current: MAX 2A



[Unit: mm]

Materials: ① Connector: Housing/ XAP-02V-1, Contact/ SXA-01T-P0.6 (J.S.T. Mfg. Co., Ltd.) ② Cable: AWG#20, Red/ Plus (+), Black/ Minus (-)


Other Options for RTR-501 / 502 / 503 / 505 / 507

Maintenance Set

TR-00P1


Kit Contents:

- Rubber Packing (for the rear cover of the data logger)
- Silica Gel (drying agent)
- Double-sided Adhesive Tape (to fix the silica gel)
- Lock Screw (extra screws to tighten the rear cover of the data logger)



External Power Adaptor Kit

RTR-500A1



Input Voltage: DC 6 to 14V

Backup Power:

Ni-MH Battery (In case of power loss)

Back-up Time: About 4 days *

Charging Method: Trickle Charge


Operational Environment Temp: 0 to 60°C

Water Resistance: None

Weight: About 37g (without AC Adaptor)

Kit Contents:

- AC Adaptor (AD-0638 or AD-0638-C),
- Rubber Packing (small) for AC Adaptor Jack
- Case and Attachment Hook
- Maintenance Set (TR-00P1)



[Unit: mm]




* Varies depending on the amount of charge in the Ni-MH battery.

Battery Set

TR-11P2


Kit Contents:

- Lithium Battery (LS14250)
- Maintenance Set (TR-00P1)



Large Capacity Battery Kit

RTR-500B1



Power: Lithium Battery x 1 (LS26500) (*1)

Battery Life: about 4 years (*2)


Waterproof Capability: Splash proof

Operating Temperature: -40 to 80 °C (*3)

Weight: about 75g (including Lithium Battery)

Kit Contents:

- Large Capacity Battery Adaptor
- Attachment hook
- Maintenance Set (TR-00P1)



[Unit: mm]



*1: When using RTR-500B1 it is necessary to purchase Lithium Battery (LS26500). For details, contact your local authorized distributor.

*2: Battery Life varies depending on measuring environment, recording interval, transmission frequency, and ambient temperature. The battery life estimated here is calculated using a new battery under normal operating conditions and in no way should be understood as a guarantee of battery life.

*3: Operating temperature depends on the specifications for the data logger being used.

AC Adaptors for Base Units

RTR-500NW / 500AW / 500 / 500DC


AD-0638

Cable Length: 1.8 m
Input: AC 100 - 240 V
Output: DC6 V 500 mA
Frequency: 50 / 60 Hz
Plug Type : A



AD-0638-C


Cable Length: 1.8 m
Input: AC100 - 240 V
Output: DC6 V 500 mA
Frequency: 50 / 60 Hz
Plug Type: C



RTR-500GSM


AD-0605

Cable Length: 1.8 m
Input: AC100 V (90 - 132 V)
Output: DC 5V 2 A
Frequency: 50 / 60 Hz
Plug Type : A



AD-05C1

Cable Length: 1.6 m
Input: AC100 - 240V
Output: DC 5 V 2 A
Frequency: 50 / 60Hz
Plug Type: C



Wall Attachment

TR-05K3 (RTR-501 / 502 / 503 / 505 / 507)


Accessories:

- Lock Screw x 2,
- Double-sided adhesive tape x 1

Operational Environment

Temp: -40 to 80°C

Materials: Polycarbonate




TR-07K2 (RTR-574)

Accessories:

- Lock Screw x2,
- Double-sided adhesive tape x 1

Materials: Polycarbonate




TR-5GK1 (RTR-500GSM)

Contents:

- Lock Screw x 2
- Double-sided Adhesive tape x 1

Materials: ① Aluminum ② Rubber



TR-05K3L (for -L Types)


Accessories:

- Lock Screw x 2,
- Double-sided adhesive tape x 1

Operational Environment

Temp: -40 to 80°C

Materials: Polycarbonate




AT-76K1 (RTR-576)

Accessories:

- Lock Screw x 2,
- Double-sided adhesive tape x 1

Materials: Aluminum




TR-5WK1 (RTR-500NW / 500AW)

Accessories:

- Lock Screw for fastening to wall x 2,
- Double-sided adhesive tape x 1,
- Lock Screw for fastening the device x 1

Materials: Polycarbonate

**Note:** Cracking may occur if polycarbonate is exposed to strong impact at temperatures of -30°C or lower.

RTR-500 Series - Specifications

Remote Units (Data Logger)						
	RTR-501 / 501L	RTR-502 / 502L	RTR-503 / 503L		RTR-507 / 507L	
Measurement Channels	Temperature 1ch (Internal)	Temperature 1ch (External)	Temperature 1ch, Humidity 1ch (External)		Temperature 1ch, Humidity 1ch (External)	
Sensor	Thermistor	Thermistor	Thermistor	Polymer Resistance	Platinum Resistance	Electrostatic Capacitance
Measurement Units	°C, °F	°C, °F	°C, °F	%RH	°C, °F	%RH
Measurement Range	-40 to 80 °C	-60 to 155 °C	0 to 55 °C	10 to 95 %RH	-30 to 80 °C	0 to 99 %RH
Accuracy	Avg.±0.5 °C	Avg.±0.3 °C [-20 to 80 °C] Avg.±0.5 °C [-40 to -2 °C / 80 to 110 °C] Avg.±1.0 °C [-60 to -40 °C / 110 to 155 °C]	Avg.±0.3 °C	±5 %RH [at 25 °C, 50 %RH]	±0.3°C [at 0 to 50 °C] ±0.5°C [at all other temperatures]	±2.5 %RH [at 25 °C, 10 to 85 %RH] ±4.0 %RH [at 25 °C, 0 to 10 %RH or 85 to 99 %RH] At temperatures other than 25 °C and ≥ 0 °C, add ±0.1 %RH per degree of difference from 25. Humidity Hysteresis: ±1.5 %RH or lower (※1)
Measurement Resolution	0.1 °C	0.1 °C	0.1 °C	1 %RH	0.1 °C	0.1 %RH
Responsiveness	Thermal Time Constant: Approx. 15 min. Approx. 25 min. (L Type) Response Time (90%): Approx. 35 min. Approx. 47 min. (L Type)	Thermal Time Constant: Approx. 30 sec. (in air) Approx. 4 sec. (in agitated water) Response Time (90%): Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)	Response Time (90%): Approx. 7 min.		Response Time (90%): Approx. 7 min.	Response Time (90%): Approx. 20 sec.
Logging Capacity	16,000 readings		8,000 data sets (One data set consists of readings for multiple channels)			
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.					
Recording Mode (※2)	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)					
LCD Display Items	Measurements (alternating display for multiple channel devices), Battery Life Warning, etc.				Measurements (alternating display), Battery Life Warning, etc.	
Communication Interfaces	- Wireless Communication (Short Range Radio Communication) FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - Optical Communication (proprietary protocol)					
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed					
Power	Lithium Battery: LS14250 (※3) x 1 L Type: Large Capacity Battery Adaptor Kit (RTR-500B1) (※4) External Power Adaptor Kit (RTR-500A1: sold separately)					
Battery Life (※5)	About 10 months L Type: About 4 years					
Dimensions	H 62 mm x W 47 mm x D 19 mm L type: H 62 mm x W 47 mm x D 46.5 mm (excluding protrusions and sensor) Antenna length: 24 mm					
Weight	Approx. 56 g L Type: approx. 109 g (including battery / excluding sensor)					
Operating Environment	-40 to 80°C (-30 to 80°C during wireless communication)				-40 to 80°C (~10 to 80°C during wireless communication) (※6)	
Waterproof Capacity	IP67: Immersion proof	IP64: Splash proof (rated for use in daily life) (※7)	IP64: Splash proof (rated for use in daily life) (※7) Note: Sensor is not water resistant.		IP64: Splash proof (rated for use in daily life) (※7) Note: Sensor is not water resistant.	
Accessories	-	Temperature Sensor (TR-5106)	Temperature / Humidity Sensor (TR-3310)		Temperature / Humidity Sensor (HHB-3101)	
	Lithium Battery (LS14250) or Large Capacity Battery Adaptor Kit (RTR-500B1), Strap (Not included with L type models), User's Manual (Warranty included)					
Compatible Base Units	RTR-500, RTR-500NW / 500AW, RTR-500DC, RTR-500GSM				RTR-500, RTR-500NW / 500AW, RTR-500DC	

*1: When used in environments where temperature and humidity are over the values of 50°C 75%, 60°C 50%, 70°C 35%, and 80°C 25%, sensor hysteresis may fluctuate by values greater than ±1.5%RH. Under certain circumstances, it may take some time to return to normal measurement capability.

*2: Only "Endless" is available when using RTR-500W for Windows or RTR-500GSM for Windows.

*3: The included lithium battery (LS14250) is not sold in stores. Please purchase the optional battery set for low-temperature use (TR-11P2) for replacement.

*4: When using RTR-500B1 it is necessary to purchase Lithium Battery (LS26500). For details, contact your local authorized distributor.

*5: Battery life varies depending upon the ambient temperature in which it is used, the recording interval, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

*6: When wireless communication is performed in an environment below -10°C, measurement may fail or may not be accurate.

*7: This is the waterproof capacity of the data logger with the sensor connected.

The specifications listed above are subject to change without notice.

Remote Units (Data Logger)

	RTR-505-TC/ 505-TCL	RTR-505-Pt/ 505-PtL	RTR-505-V / 505-VL	RTR-505-mA/ 505-mAL	RTR-505-P/ 505-PL
Measurement Channels	Temperature 1ch	Temperature 1ch	Voltage 1ch	4-20 mA 1ch	Pulse Count 1ch
Sensor	Thermocouple: Type K, J, T, S	Pt100, Pt1000 (3-wire)	-	-	-
Measurement Units	°C, °F	°C, °F	V, mV	mA	P
Measurement Range	-199 to 1700 °C	-199 to 600 °C	0 to 22 V	0 to 20 mA (Operational up to 40 mA)	Input Signal: Non-voltage Contact Input Voltage Input (0 to 27 V) Detection Voltage: Lo: 0.5 V or less Hi: 2.5 V or more Input Impedance: Approx.100 KΩ pull up Chattering Filter: ON: 15 Hz or less OFF: 3.5 kHz or less Maximum Count: 61,439 / Recording Interval
Accuracy (*1)	Thermocouple Measurement ± (0.3 °C + 0.3 % rdg) [Type K, J, T] ± (1 °C + 0.3 % rdg) [Type S] Cold Junction Compensation ±0.3 °C [10 to 40 °C] ±0.5 °C [-40 to 10 °C / 40 to 80 °C]	± (0.3 °C + 0.3 % rdg) [10 to 40 °C] ± (0.5 °C + 0.3 % rdg) [-40 to 10 °C / 40 to 80 °C]	± (0.5 mV + 0.3 % rdg) [10 to 40 °C] ± (1 mV + 0.5 % rdg) [-40 to 10 °C / 40 to 80 °C]	±(0.05 mA + 0.3 % rdg) [10 to 40 °C] ±(0.1mA + 0.3 % rdg) [-40 to 10 °C / 40 to 80 °C]	
	Note: The above temperatures [_ _ °C] are for the operating environment of the Input Module.				
Measurement Resolution	Type K, J, T: 0.1 °C Type S: approx. 0.2 °C	0.1 °C	Up to 400 mV : 0.1 mV, Up to 800 mV : 0.2 mV, Up to 999 mV : 0.4 mV, Up to 3.2 V : 1 mV, Up to 6.5 V : 2 mV, Up to 9.999 V : 4 mV, Up to 22 V : 10 mV	0.01 mA	
Logging Capacity	16,000 readings				
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.				
Recording Mode (*2)	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)				
LCD Display Items	Measurements, Battery Life Warning, etc.				
Communication Interfaces	- Wireless Communication (Short Range Radio Communication) FCC Part15 Section 247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - Optical Communication (proprietary protocol)				
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed				
Power	Lithium Battery: LS14250 (*3) L Type: Large Capacity Battery Adaptor Kit (RTR-500B1) (*4) External Power Adaptor Kit (RTR-500A1: sold separately)				
Battery Life (*5)	About 10 months L Type: About 4 years				
Dimensions	H 62 mm x W 47 mm x D 19 mm L type: H 62 mm x W 47 mm x D 46.5 mm (excluding protrusions and Input Module) Antenna length: 24 mm				
Weight	Approx. 56 g L Type: approx. 109 g (including battery / excluding Input Module)				
Operating Environment	-40 to 80 °C (-30 to 80°C during wireless communication)				
Waterproof Capacity (*6)	IP64: Splash proof (rated for use in daily life) Note: Input Module is not water resistant.				
Accessories	Input Module (TCM-3010)	Input Module (PTM-3010)	Input Module (VIM-3010)	Input Module (AIM-3010)	Input Module (PIC-3150)
	Lithium Battery (LS14250) or Large Capacity Battery Adaptor Kit (RTR-500B1), Strap (Not included with L type models), User's Manual (Warranty included)				
Compatible Base Units	RTR-500, RTR-500NW/500AW, RTR-500DC, RTR-500GSM		RTR-500, RTR-500NW/500AW, RTR-500DC		

*1: "rdg" stands for reading.

*2: Only "Endless" is available when using RTR-500W for Windows or RTR-500GSM for Windows.

*3: The included lithium battery (LS14250) is not sold in stores. Please purchase the optional battery set for low-temperature use (TR-11P2) for replacement.

*4: When using RTR-500B1 it is necessary to purchase Lithium Battery (LS26500). For details, contact your local authorized distributor.

*5: Battery life varies depending upon the ambient temperature in which it is used, the recording interval, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

*6: This is the waterproof capacity of the data logger with the Input Module connected.

The specifications listed above are subject to change without notice.

RTR-500 Series - Specifications

Remote Units (Data Logger)				
	RTR-574		RTR-574-H	
Temperature/Humidity Sensor (External)	THA-3151		HHA-3151 (High-Precision Type)	
	Thermistor	Polymer Resistance	Platinum Resistance	Electrostatic Capacitance
Measurement Channels	Temperature 1ch	Humidity 1ch	Temperature 1ch	Humidity 1ch
Units of Measurement	°C, °F	%RH	°C, °F	%RH
Measurement Range	0 to 55 °C	10 to 95 %RH	-30 to 80 °C	0 to 99 %RH
Accuracy	±0.5 °C	± 5 %RH [at 25 °C, 50 %RH]	± 0.3°C [0 to 50 °C] ± 0.5°C [all other temperatures]	±2.5 %RH [at 25 °C, 10 to 85 %RH] ±4.0 %RH [at 25 °C, 0 to 10 % or 85 to 99 %RH] At temperatures other than 25 °C and ≥ 0 °C, add ±0.1 %RH per degree of difference from 25. Humidity Hysteresis: ±1.5 %RH or lower (*1)
Measurement Resolution	0.1 °C	1 %RH	0.1 °C	0.1 %RH
Responsiveness	Response Time (90%) : Approx. 7 min.		Response Time (90%) : Approx. 7 min.	Response Time (90 %) : Approx. 20 sec.
Illuminance/UV Sensor (External)	ISA-3151			
Measurement Channels	Illuminance: 1ch UV Intensity: 1ch			
Units of Measurement	Illuminance: lx, klx UV Intensity: mW/cm2			
Measurement Range	Illuminance: 0 lx to 130 klx UV Intensity: 0 to 30 mW/cm2			
Units of Cumulative Measurement	Cumulative Illuminance: lxh, klxh, Mlxh Cumulative amount of UV Light: mW/cm2h, W/cm2h			
Display Range of Cumulative Measurement	Illuminance: 0 lxh to 90 Mlxh UV Intensity: 0 mW to 62 W/cm2h			
Accuracy	Illuminance: 10 lx to 100 klx: ±5 % [at 25 °C, 50 %RH] UV Intensity: 0.1 to 30 mW/cm2 : ±5 % [at 25 °C, 50 %RH] (*2)			
Relative Spectral Response	Illuminance: Approximated to the CIE standard response function V (λ) UV Intensity: 260 to 400 nm (UVA / UVB)			
Measurement Resolution	Illuminance: Minimum of 0.01 lx UV Intensity: Minimum of 0.001 mW/cm2			
Responsiveness	Response Time (90%) : 3 sec. (at recording interval of 1 sec.) 6 sec. (at other intervals)			
Logging Capacity	8,000 data sets (One data set consists of readings for all channels in that type of unit.)			
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.			
Recording Mode (*3)	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)			
LCD Display Items	Measurements, Battery Life Warning, etc. - Measurements: Illuminance / UV Intensity / Temperature / Humidity / Cumulative Illuminance / Cumulative amount of UV Light - Display Pattern: Alternating or Fixed display - Display Digits: Up to 4 digits			
Communication Interfaces	- Wireless Communication (Short Range Radio Communication) FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - USB Communication - Serial Communication (RS-232C) (*4)			
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed			
Power	AA Alkaline Battery (LR6) x 1			
Battery Life (*5)	Approx. 4 months			
Dimensions	H 55 mm x W 78 mm x D 18 mm (excluding protrusions) Antenna Length: 60 mm			
Weight	Approx. 68 g (including battery, excluding sensor)			
Operating Environment	Temperature: -10 to 60 °C Humidity: 90 %RH or less (no condensation)			
Accessories	Temperature / Humidity Sensor (THA-3151)		Temperature / Humidity Sensor (HHA-3151)	
	AA Alkaline Battery (LR6), USB Communication Cable (US-15C), Illuminance / UV Sensor (ISA-3151), User's Manual Set (Warranty Included)			
Compatible Base Units	RTR-500C, RTR-500NW/500AW, RTR-500DC			

*1: When used in environments where temperature and humidity are over the values of 50°C 75%, 60°C 50%, 70°C 35%, and 80°C 25%, sensor hysteresis may fluctuate by values greater than ±1.5%RH. Under certain circumstances, it may take some time to return to normal measurement capability.

*2: Compared to the value measured by the T&D standard sensor for calibration under our calibration light source.

*3: Only "Endless" is available when using RTR-500W for Windows or RTR-500GSM for Windows.

*4: For communication with the Data Collector RTR-500DC (Note: Optional serial communication cable TR-6C10 is required.)

*5: Battery life varies depending upon the ambient temperature in which it is used, the recording interval, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.
The specifications listed above are subject to change without notice.

Remote Units (Data Logger)				
	RTR-576		RTR-576-H	
Temperature/Humidity Sensor (External)	THA-3151		HHA-3151 (High-Precision Type)	
	Thermistor	Polymer Resistance	Platinum Resistance	Electrostatic Capacitance
Measurement Channels	Temperature 1ch	Humidity 1ch	Temperature 1ch	Humidity 1ch
Units of Measurement	°C, °F	%RH	°C, °F	%RH
Measurement Range (*1)	0 to 55 °C	10 to 95 %RH	-30 to 80 °C	0 to 99 %RH
Accuracy	±0.5 °C	±5 %RH [at 25 °C, 50 %RH]	±0.3°C [at 0 to 50 °C] ±0.5°C [at all other temperatures]	±2.5 %RH [at 25 °C, 10 to 85 %RH] ±4.0 %RH [at 25 °C, 0 to 10 % or 85 to 99 %RH] At temperatures other than 25 °C and ≥ 0 °C, add ±0.1 %RH per degree of difference from 25. Humidity Hysteresis: ±1.5 %RH or lower (*2)
Measurement Resolution	0.1 °C	1 %RH	0.1 °C	0.1 %RH
Responsiveness	Response Time (90%): Approx. 7 min.		Response Time (90%): Approx. 7 min.	Response Time (90%): Approx. 20 sec.
CO2 Sensor (Internal)	NDIR			
Measurement Channels	CO2 Concentration 1ch			
Units of Measurement	ppm			
Measurement Range	0 to 9,999 ppm			
Accuracy	±(50 ppm + 5 % of reading) [at 5,000 ppm or less] (*3)			
Measurement Resolution	Minimum of 1 ppm			
Responsiveness	Response Time (90%): Approx. 1 min.			
Logging Capacity	8,000 data sets (One data set consists of readings for all channels in that type of unit.)			
Recording Interval	Select from 15 choices: 1, 2, 5, 10, 15, 20, 30 sec. or 1, 2, 5, 10, 15, 20, 30, 60 min.			
Recording Mode (*4)	Endless (Overwrite oldest data when capacity is full) or One Time (Stop recording when capacity is full)			
LCD Display Items	Measurements, Battery Level, etc. - Measurements: CO2 concentration, Temperature or Humidity (fixed or alternating display)			
Communication Interfaces	- Wireless Communication (Short Range Radio Communication) FCC Part15 Section 247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - USB Communication - Serial Communication (RS-232C) (*5)			
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed			
External Alarm Terminal (*6)	Output Terminal: Open Drain Output (Voltage when OFF: DC less than 30V / Current when ON: less than 0.1 A / Resistance when ON: about 15 Ω)			
Power	AC Adaptor (AD-0638 or AD-0638-C), AA Alkaline Battery (LR6) x 4			
Battery Life (*7)	Approx. 2 days (batteries only without AC adaptor)			
Dimensions	H 96 mm x W 66 mm x D 46 mm (excluding protrusions and sensor) Antenna Length: 60 mm			
Weight	Approx. 220 g (including battery, excluding sensor)			
Operating Environment	Temperature: 0 to 45 °C Humidity: 90 %RH or less (no condensation)			
Accessories	Temperature / Humidity Sensor (THA-3001)		Temperature / Humidity Sensor (HHA-3151)	
	AA Alkaline Battery (LR6) x 4, AC Adaptor (AD-0638 or AD-0638-C), USB Communication Cable (US-15C), User's Manual Set (Warranty Included)			
Compatible Base Units	RTR-500, RTR-500NW/500AW, RTR-500DC			

*1: Make sure to use the data logger within the operating environment as listed in the specifications.

*2: When used in environments where temperature and humidity are over the values of 50% 75%, 60% 50%, 70% 35%, and 80% 25%, sensor hysteresis may fluctuate by values greater than ±1.5%RH. Under certain circumstances, it may take some time to return to normal measurement capability.

*3: Stated value is the measurement accuracy of the CO2 sensor when Auto Calibration is operating properly. A change in atmospheric pressure directly influences the reading of CO2, which can cause measurement errors; a decrease in pressure by 10hPa results in a relative decrease in CO2 by 1.6%. In such a case, we recommend carrying out the "Atmospheric Pressure Correction" function found in the software supplied with the Base Unit.

*4: Only "Endless" is available when using RTR-500W for Windows or RTR-500GSM for Windows.

*5: For communication with the Data Collector RTR-500DC (Note: Optional serial communication cable TR-6C10 is required.)

*6: In order to use the external alarm terminal, please prepare a compatible connector: JST PAP-04V-S.

*7: Battery life varies depending upon the ambient temperature in which it is used, the recording interval, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

The specifications listed above are subject to change without notice.

RTR-500 Series - Specifications

Base Unit		
	RTR-500GSM	RTR-500NW / RTR-500AW
Compatible Devices	Remote Units: RTR-501 / 502 / 503 / 505-TC / 505-Pt (Including L Type) Repeater: RTR-500	Remote Units: RTR-501 / 502 / 503 / 507 / 574 / 576 / 505-TC / 505-Pt / 505-V / 505-mA / 505-P (Including L Type and H Type) Repeater: RTR-500
Maximum Number of Registrations	Remote Units: 20 units Repeaters: 5 units x 4 groups	Remote Units: 100 units Repeaters: 10 units x 10 groups
Communication Interfaces	<Between Base Unit(s) - (Repeaters) - Remote Unit(s)> - Wireless Communication (short range radio communication) FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) <Between Base Unit - PC> - USB Communication (For Setup)	<Between Base Unit(s) - (Repeaters) - Remote Unit(s)> - Wireless Communication (short range radio communication) FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - Optical Communication (proprietary protocol) (With compatible Remote Units except RTR-574 and RTR-576) <Between Base Unit - PC> - RTR-500NW: Wired LAN RJ45 Connector 100 Base-TX / 10 Base-T AutoMDI / MDI-X - RTR-500AW: Wireless LAN Internal wireless LAN antenna, IEEE 802.11b / g WEP (64 bit / 128 bit) / WPA-TKIP / WPA2 - AES - USB Communication (For Setup)
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed	Approx. 150 meters (500 ft) if direct and unobstructed
External Alarm Input/Output Terminal (*1)	<Input Terminal> Internal Pull-up: 3 V 100 kΩ Maximum Input Voltage: 30 V <Output Terminal> Voltage when OFF: DC 30 V or less Current when ON: 0.1 A or less Resistance when ON: 15 Ω	<Input Terminal> Internal Pull-up: 3 V 100 kΩ Maximum Input Voltage: 30 V < Output Terminal > Voltage when OFF: AC / DC 50 V or less Current when ON: 0.1 A or less Resistance when ON: 35 Ω
Communications Protocol	SMTP (POP before SMTP, SMTP-AUTH <LOGIN>), FTP, SMS (*2)	SMTP (POP before SMTP, SMTP-AUTH <LOGIN>), FTP, SNMP, DHCP, DNS
Power	AA Alkaline Battery (LR6) x 4 AC Adaptor (AD-0605 or AD-05C1) (5V, 2A) External Power Supply (DC8 - 34V)	AC Adaptor (AD-0638 or AD-0638-C)
Battery Life (*3)	Expected battery life with only AA alkaline batteries: Approx. 10 days (with warning report settings ON, without using GPS)	-
Dimensions	H 96 mm x W 66 mm x D 39 mm (excluding antenna) Antenna Length: 109 mm	H 83 mm x W 102 mm x D 28 mm (excluding antenna) Antenna Length: 87.3 mm
Weight	Approx. 220 g (including batteries)	RTR-500NW: Approx. 130 g RTR-500AW: Approx. 120 g
Operating Environment	Temperature: 10 to 55 °C (-10 to 55 °C with external power connected) Humidity: 90 %RH or less (no condensation)	Temperature: -10 to 60 °C Humidity: 90 %RH or less (no condensation)
Accessories	AA Alkaline Battery (LR6) x 4, Antenna x 2, USB Communication Cable (US-15C), External Power Cable (BC-0201), Software (CD-ROM), Introductory Manual Set (Warranty Included)	Antenna, USB Communication Cable (US-15C), LAN Cable (LN-20W, only for RTR-500NW), AC Adaptor (AD-0638 or AD-0638-C), Software (CD-ROM), Introductory Manual Set (Warranty Included)
GPS Interface (*4)	Connector: Mini DIN 6 Pin Female Communication Standard: ANSI / EIA / TIA-232-E Geographic Coordinate System: WGS 84 Power Supply: 5 V MAX 100 mA	-
SIM Card (*2) (*5)	SIM card compatible with GSM (Standard size) US: GSM 850 MHz 1900 MHz EU: GSM 900 MHz 1800 MHz GPRS (General Packet Radio Service) enabled	-
Compatible OS (*6) (*7)	<for US> Microsoft Windows 8 32 / 64 bit English, Spanish Microsoft Windows 7 32 / 64 bit English, Spanish Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish Microsoft Windows XP 32 bit (SP3 or later) English, Spanish <for EU> Microsoft Windows 8 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows 7 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish, French, German, Italian Microsoft Windows XP 32 bit (SP3 or later) English, Spanish, French, German, Italian	<for US> Microsoft Windows 8 32 / 64 bit English, Spanish Microsoft Windows 7 32 / 64 bit English, Spanish Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish Microsoft Windows XP 32 bit (SP3 or later) English, Spanish <for EU> Microsoft Windows 8 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows 7 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish, French, German, Italian Microsoft Windows XP 32 bit (SP3 or later) English, Spanish, French, German, Italian

*1: In order to use the external alarm terminal for RTR-500GSM, please prepare a compatible connector: JST PAP-04V-S.

*2: SMS is required for some functions of the RTR-500GSM. If SMS is necessary, make sure that the contract you have with your carrier includes this service.

*3: Battery life varies depending upon the number of warning reports sent, the ambient temperature in which it is used, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

*4: In order to use the GPS function (attach geographical positioning info to current readings data), please purchase a compatible GPS receiver: GlobalSat BR-355. For all inquiries and questions concerning sales of the product, please directly contact GlobalSat at (<http://www.globalsat.com.tw>).

*5: Please prepare a contracted SIM card separately.

*6: For installation, it is necessary to have Administrator (Computer Administrator) rights.

*7: If you are using Windows 8, please note that our software is designed to be used in "Desktop" mode only.

The specifications listed above are subject to change without notice.

Base Unit / Repeater		
	RTR-500DC	RTR-500
Compatible Devices	Remote Units: RTR-501 / 502 / 503 / 507 / 574 / 576 / 505-TC / 505-Pt / 505-V / 505-mA / 505-P (Including L Type and H Type) Repeater: RTR-500	Remote Units: RTR-501 / 502 / 503 / 507 / 574 / 576 / 505-TC / 505-Pt / 505-V / 505-mA / 505-P (Including L Type and H Type) Repeater: RTR-500
Maximum Number of Registrations	Remote Units: 32 units x 7 groups (16 units x 7 groups for RTR-505 / 574 / 576) Repeaters: 15 units x 7 groups	Remote Units: 32 units x 20 groups Repeaters: 30 units x 20 groups
Storage Capacity	When downloading from units filled to logging capacity: - 15 units of RTR-501 / 502 / 503 / 505 / 507 - 7 units of RTR-574 - 10 units of RTR-576 When downloading from units of any type containing small amounts of data, it can store and manage up to 250 download sessions.	-
Communication Interfaces	<Between Base Unit(s) - (Repeaters) - Remote Unit(s)> - Wireless Communication (short range radio communication) FCC Part15 Section 247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870 MHz, RF Power: 5 mW) - Optical Communication (proprietary protocol) (With compatible Remote Units except RTR-574 and RTR-576) - Serial Communication (RS-232C) (*1) (With RTR-574 and RTR-576) <Between Base Unit - PC> - USB Communication - Serial Communication (RS-232C) (*2)	<Between Base Unit(s) - (Repeaters) - Remote Unit(s)> - Wireless Communication (short range radio communication) FCC Part15 Section247 / IC RSS-210 (Frequency Range: 902 to 928 MHz, RF Power: 7 mW) ETSI EN 300 220 (Frequency Range: 869.7 to 870MHz, RF Power: 5 mW) - Optical Communication (proprietary protocol) (With compatible Remote Units except RTR-574 and RTR-576) <Between Base Unit - PC> - USB Communication - Serial Communication (RS-232C) (*2)
Wireless Transmission Range	Approx. 150 meters (500 ft) if direct and unobstructed	Approx. 150 meters (500 ft) if direct and unobstructed
Communications Protocol	-	SMTP (POP before SMTP, SMTP-AUTH <LOGIN / PLAIN / CRAM-MD5>), FTP (*3)
Power	AAA Alkaline Battery (LR03) x 2 - AAA Ni-MH batteries, AC adaptor (AD-0638 or AD-0638-C), or USB bus power may also be used.	USB Bus Power, AA Alkaline Battery x 2, AC Adaptor (AD-0638 or AD-0638-C) (*4)
Battery Life (*5)	Expected battery life with 2 AAA alkaline batteries: - Monitoring Current Readings and Remote Unit Status: 96 hours of continuous use (For communication without Repeaters at 60 second intervals) - Monitoring Radio Waves: 32 hours of continuous use - Downloading Data via Wireless Communication: 730 consecutive sessions (When downloading RTR-501 at full logging capacity, without Repeaters, with LCD backlight Off)	As a Repeater: Approx. 6 months (When downloading full data once a day with one Repeater)
Dimensions	H 125 mm x W 58 mm x D 26.3 mm (excluding antenna) Antenna Length: 109 mm	H 96 mm x W 65 mm x D 25 mm (excluding antenna) Antenna Length: 109 mm
Weight	Approx. 127 g (including batteries)	Approx. 71 g (excluding batteries)
Operating Environment	Temperature: 0 to 50 °C Humidity: 90 %RH or less (no condensation)	Temperature: -10 to 60 °C (-30 to 60 °C with external power connected) Humidity: 90 %RH or less (no condensation)
Accessories	AAA Alkaline Battery (LR03) x 2, USB Communication Cable (US-15C), Software (CD-ROM), Introductory Manual Set (Warranty Included)	Antenna, USB Communication Cable (US-15C), Software (CD-ROM), Memo Sticker, Introductory Manual Set (Warranty Included)
Compatible OS (*6) (*7)	<for US> Microsoft Windows 8 32 / 64 bit English, Spanish Microsoft Windows 7 32 / 64 bit English, Spanish Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish Microsoft Windows XP 32 bit (SP3 or later) English, Spanish <for EU> Microsoft Windows 8 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows 7 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish, French, German, Italian Microsoft Windows XP 32 bit (SP3 or later) English, Spanish, French, German, Italian	<for US> Microsoft Windows 8 32 / 64 bit English, Spanish Microsoft Windows 7 32 / 64 bit English, Spanish Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish Microsoft Windows XP 32 bit (SP3 or later) English, Spanish <for EU> Microsoft Windows 8 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows 7 32 / 64 bit English, Spanish, French, German, Italian Microsoft Windows Vista 32 bit (SP1 or later) English, Spanish, French, German, Italian Microsoft Windows XP 32 bit (SP3 or later) English, Spanish, French, German, Italian

*1: Optional communication cable TR-6C10 is required for serial communication with RTR-574 and RTR-576.

*2: Customers wishing to write their own software, please contact your local distributor for the serial communications protocol specifications. (Note: Optional serial communication cable TR-07C is also required.)

*3: For RTR-500, the protocol is implemented in the software.

*4: When using a USB connection, the RTR-500 requires neither batteries nor AC adaptor. Please prepare two AA batteries or an AC adaptor when using the RTR-500 as a Repeater.

*5: Battery life varies depending upon the ambient temperature in which it is used, the frequency of communication, and the battery performance. All estimates are based on operations carried out with a new battery and are in no way a guarantee of actual battery life.

*6: For installation, it is necessary to have Administrator (Computer Administrator) rights.

*7: If you are using Windows 8, please note that our software is designed to be used in "Desktop" mode only.

The specifications listed above are subject to change without notice.

■ High Performance Analysis Tool: T&D Graph ■

Our new easy-to-use high performance software "T&D Graph" gives you all the power you need for effective management and analysis of recorded data. It can also be used in conjunction with **T&D WebStorage Service**.

Open Only the Data you Need

It is possible to specify search conditions to find and open only the data you want from all recorded data stored in a local folder or in the **T&D WebStorage Service**. The merging of multiple sets of data is also possible.


Analyze

Save / Output

Save



Print



CSV format data



This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

www.tandd.com

- Colors in the photos in this catalog may be different from real product colors. The specifications and designs of the products in this catalog are true as of November 2012.
- Specifications are subject to change without notice. Microsoft® and Windows® are registered trademarks of Microsoft Corporation USA and other countries. GSM is a trademark of GSM MOU Association. All registered trademarks, company names, product names and logos mentioned herein are the property of T&D Corporation or of their respective owners.

**Caution regarding safety**

For safe operation carefully read instructions before using the product.

Distributor



T&D Corporation

817-1 Shimadachi, Matsumoto, Nagano Japan 390-0852

Please send your inquiries to:

E-mail : sales@tandd.com

Facsimile : (+81) 263-40-3152



2013. 01. 16304590015 F (6th Edition)